

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RL2T04

M8805/I-036

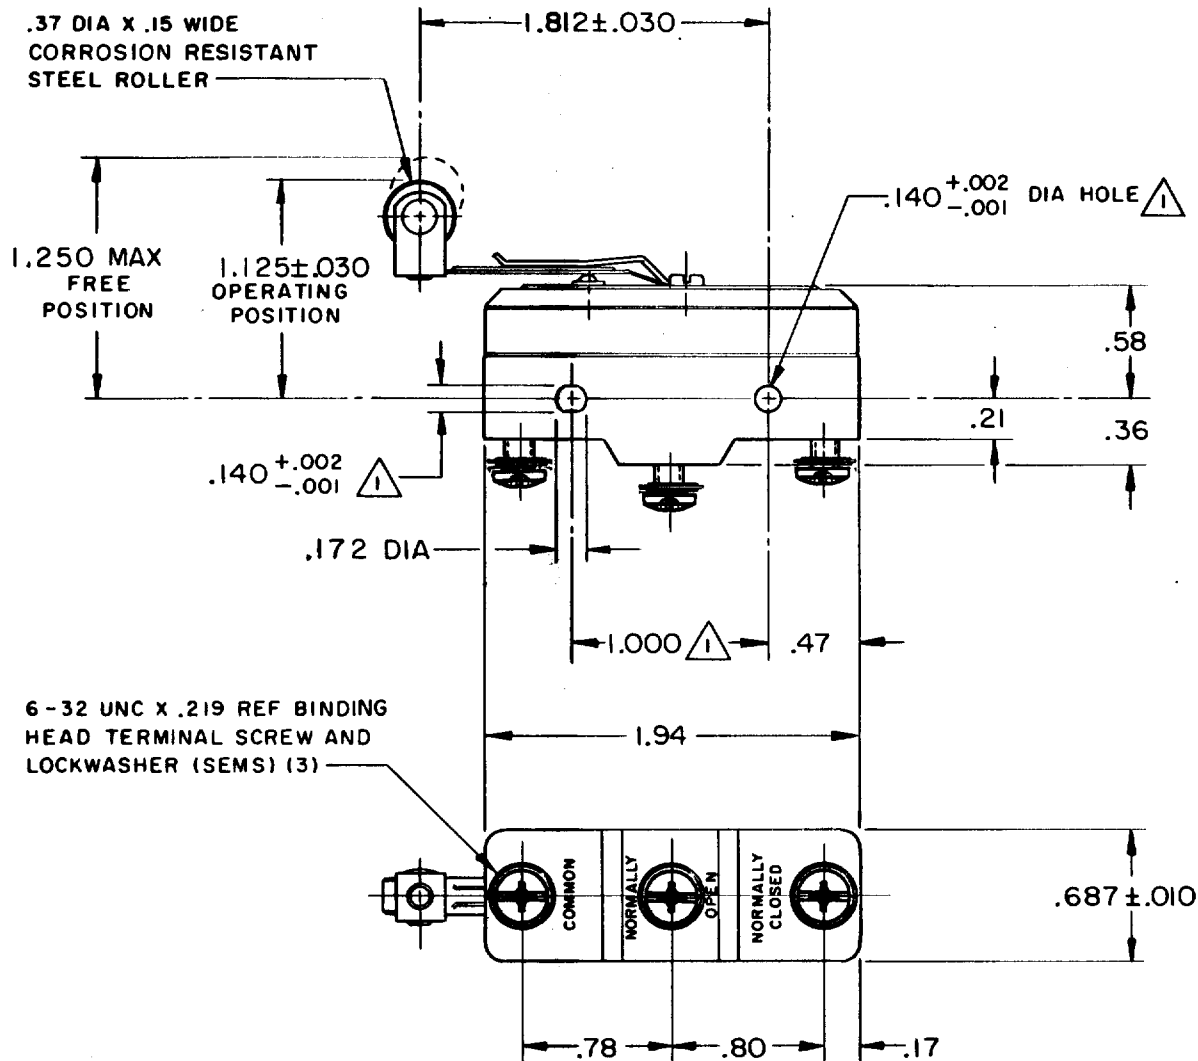

NOTE -
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 3.75-5 OZ

RELEASE FORCE — — — — 0.5 OZ MIN

PRETRAVEL — — — — .156 MAX

DIFFERENTIAL TRAVEL — — — .050 MAX

FOR OPTIMUM SWITCH LIFE DO NOT OVERTRAVEL
MORE THAN — — — — .060

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .073 LB

BZ-2RL2T04

M

DRAWING
NUMBER

ISSUE

13

REPLACES

RELEASE NO.

CHECK

REVISIONS

A CO22575

M B F

4 JAN 68

CO

22575

GFS

8 AUG 68

CO

89351-D

JWB

18 JUL 91

CHECK

22 JAN 68

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

CNT

FO-50378-1A

DRAWN

CHECK

4 JAN 68

CNT

CNT

CNT

CNT

CNT

CNT

CNT