

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
BZ-2RL5551T

BZ-2RL5551T

PAGE 1 OF 1

M

DRAWING
NUMBER

5

ISSUE

RELEASE NO. CO-34271 REPLACES

REVISIONS

A	CO67209	J A P
3	MAY 90	
B	CO-34271-D	JWB
18	JUL 91	
C	CO-77589	J A L
30	MAR 94	
D	CO93346	DLT
9	SEP 98	

CHECK

CHECK

74

NOV 74

D J W

CHECK

74

OCT 74

K P

25


FORMTEK

FO-52848-A

DRAWN

6-32 UNC X .218 REF BINDING
HEAD TERMINAL SCREW AND
LOCKWASHER (SEMS) (3)

CORROSION RESISTANT
STEEL LEAF

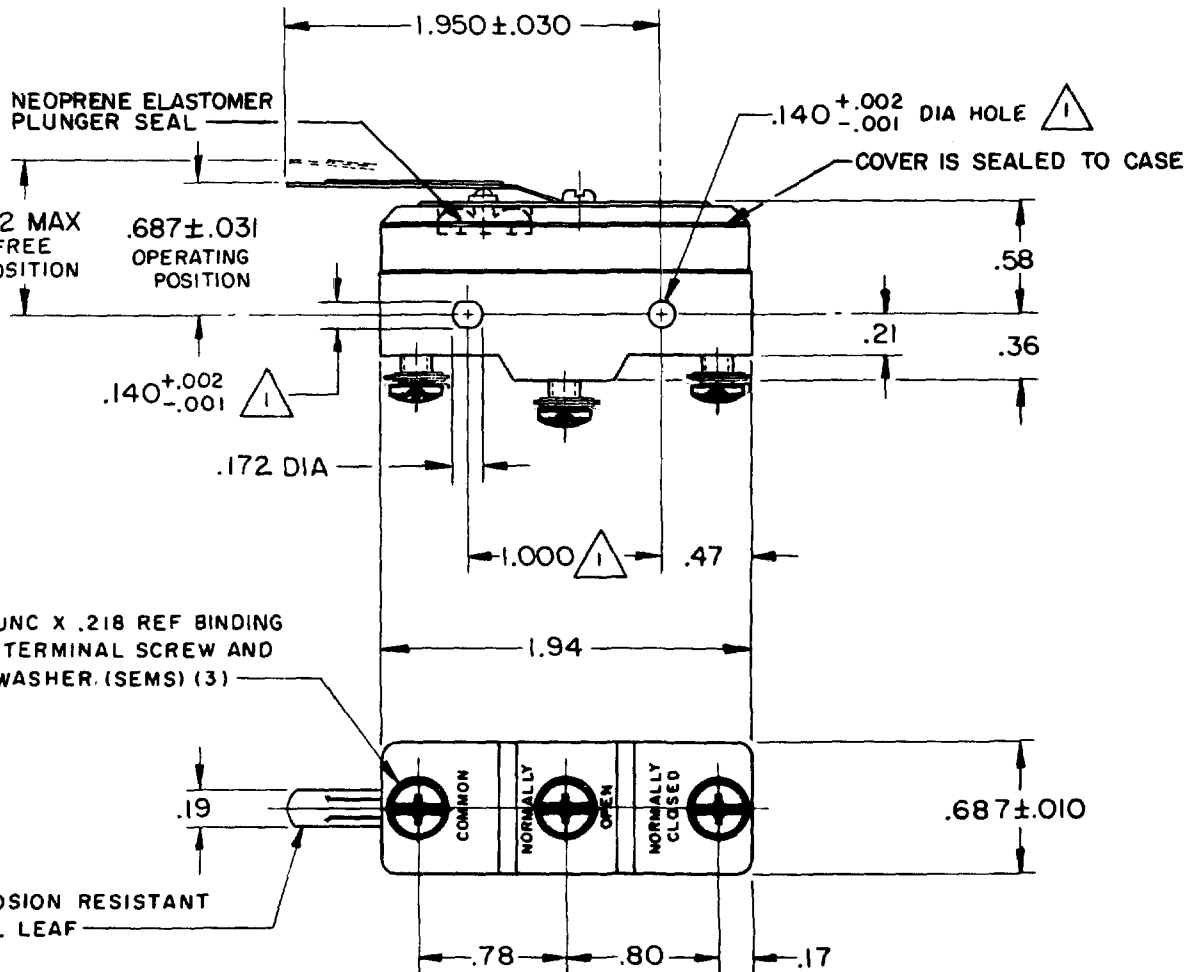


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 7 OZ MAX

RELEASE FORCE ----- 1/2 OZ MIN

DIFFERENTIAL TRAVEL ----- .050 MAX

DO NOT OVERTRAVEL MORE THAN .062

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/.04	
ONE PLACE	X,X	0.4/.015	X,X
TWO PLACES	X,XX	0.15/.005	X,XX
THREE PLACES	X,XXX		X,XXX
ANGLES			

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT