

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RL55T-S

BZ-2RL55T-S

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-6746

M

DRAWING
NUMBER

5

ISSUE

REVISIONS

A	CO-78656-B
	JALA
	25 JUL 95
B	C093346
	DLT
	9 SEP 98

CHECK

CHECK

19 JAN 78

19 JAN 78

19 JAN 78

19 JAN 78


19 JAN 78

19 JAN 78

19 JAN 78

19 JAN 78

BUNA N ELASTOMER
PLASTIC SEAL

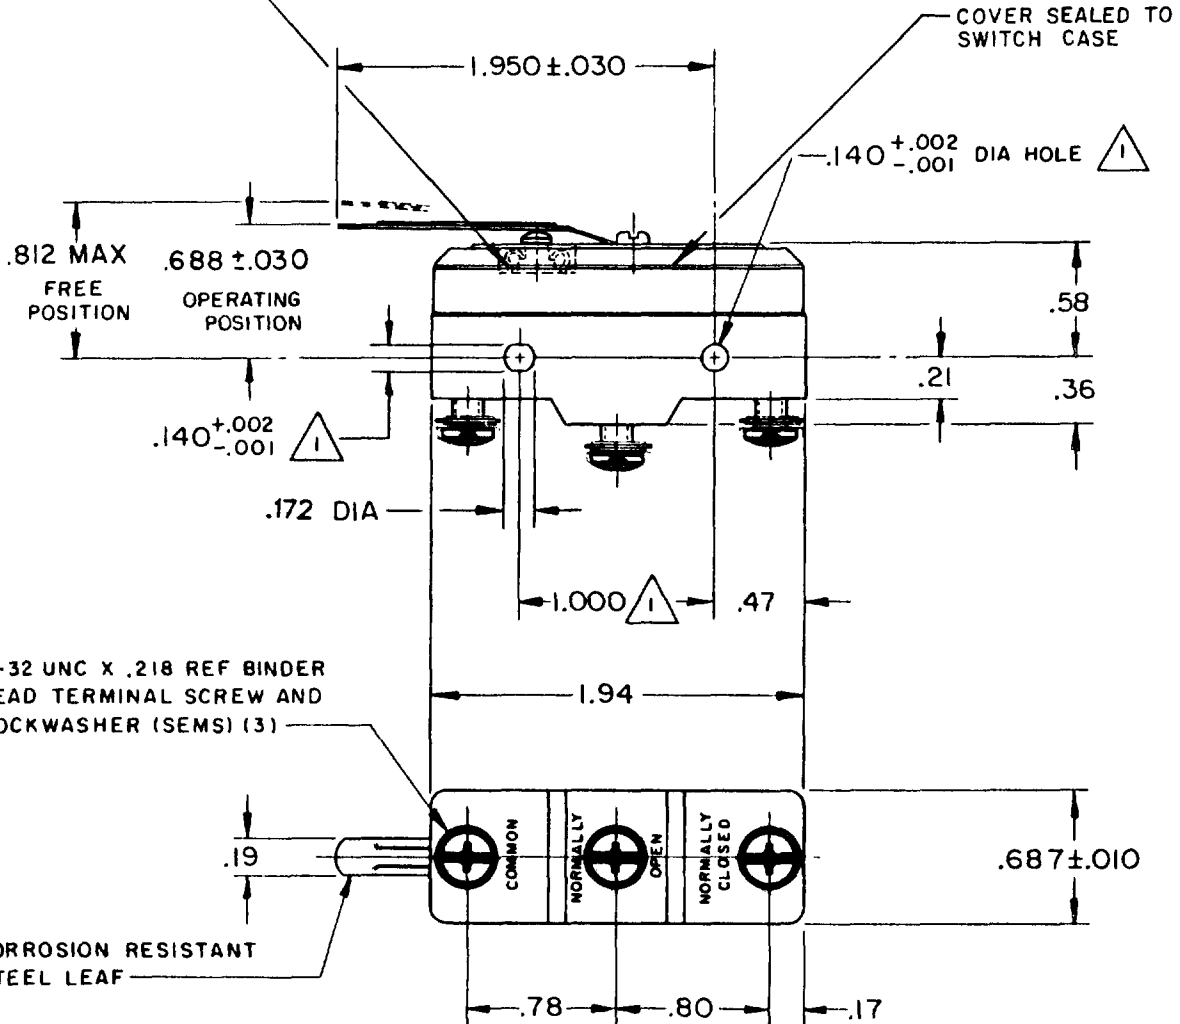

NOTES




MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE----- 7 OZ MAX

RELEASE FORCE - - - - 1/2 OZ MIN

DIFFERENTIAL TRAVEL ---- .050 MAX

OVERTRAVEL----- .060

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

UL LISTED-FILE E12252
CODE L96 15A-125, 250 OR 480 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

L288
L299
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/64	X
ONE PLACE	X,X	0.41/0.18	X,X
TWO PLACES	X,XX	0.15/0.06	X,XX
THREE PLACES	X,XXX	0.13/0.05	X,XXX
ANGLES			

SI METRIC
DESIGN UNITS ☐

US CUSTOMARY
☒

WEIGHT .063 LB

FORMTEK

DRAWN

19 JAN 78

19 JAN 78