

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ - 2RL711**BZ - 2RL711**

PAGE 1 OF 1

MDRAWING
NUMBERISSUE
7

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO17410
B	CO35664
C	CO-73287-J
D	CO-77589
E	CO93346

DLT
9 SEP 98

JAL

30 MAR 94

JAL

13 NOV 63

DRAWN

GCH

7 OCT 63

CHECK

13 NOV 63

DRAWN

GCH

7 OCT 63

CHECK

13 NOV 63

DRAWN

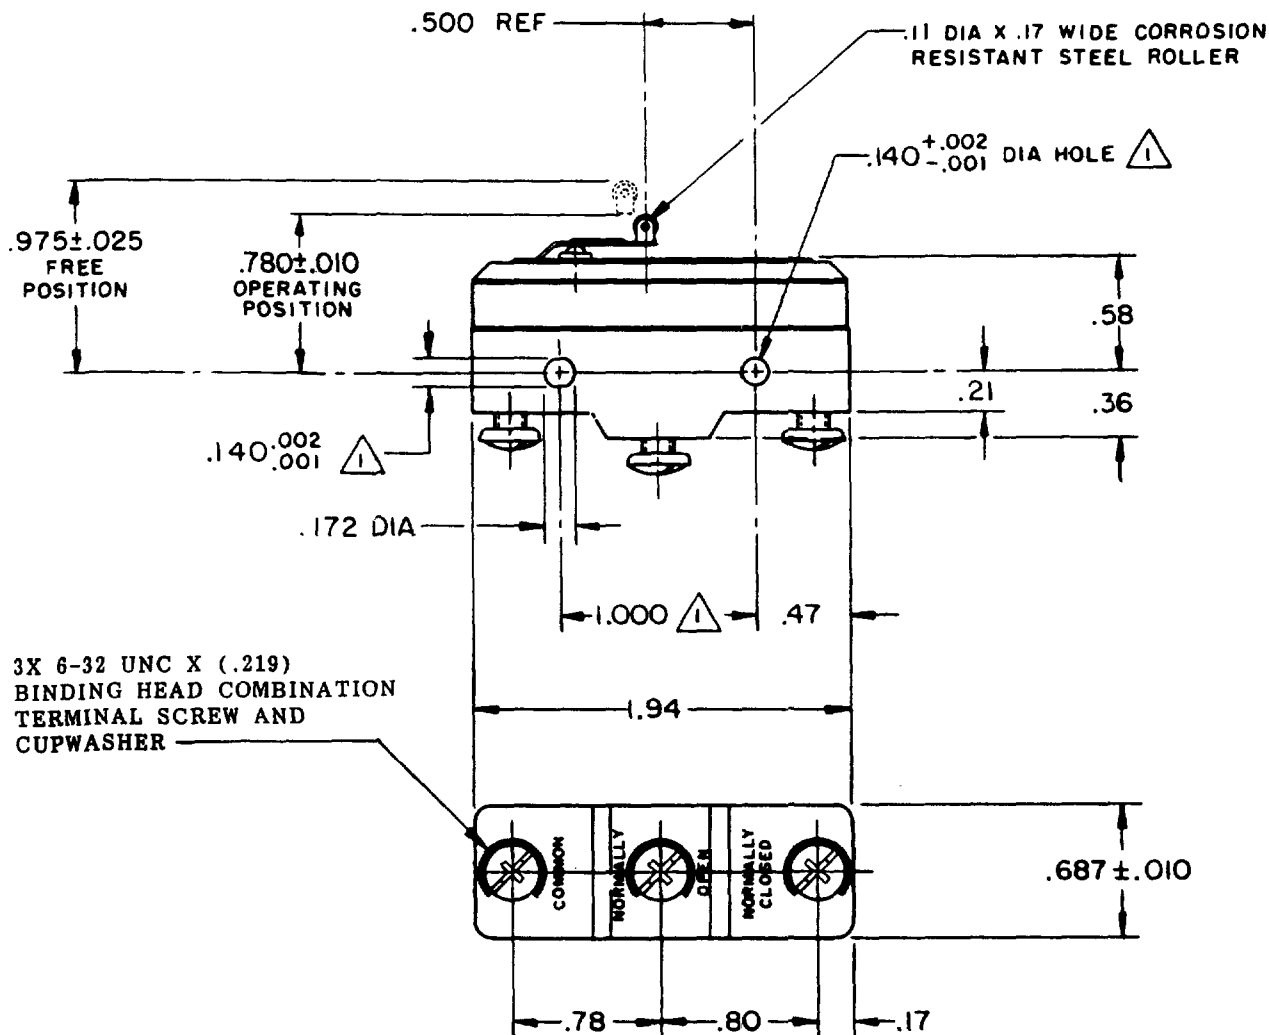
GCH

7 OCT 63

CHECK

13 NOV 63

DRAWN

**NOTE**

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS**ELECTRICAL DATA**

SCALE FULL

CONTACT ARRANGEMENT
S P D T

DO NOT SCALE PRINT

L96

15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDCL288
L299
L306

CE D

S

16A 250V ~ T85 5E4

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .063 LB

FORMTEK

FO-80378