

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASICCATALOG LISTING
BZ-2RLT**BZ-2RLT**
PAGE 1 OF 1**M**DRAWING
NUMBER

ISSUE

11

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO17410
6 C H	19 AUG 63
B	CO-88351-D
JWB	18 JUL 91
C	CO-77589
K D R	29 MAR 94
D	CO93346
DLT	9 SEP 98

CHECK

29 AUG 63

DAW

CHECK


19 AUG 63

G C H

FORMTEK

FO-50378

DRAWN

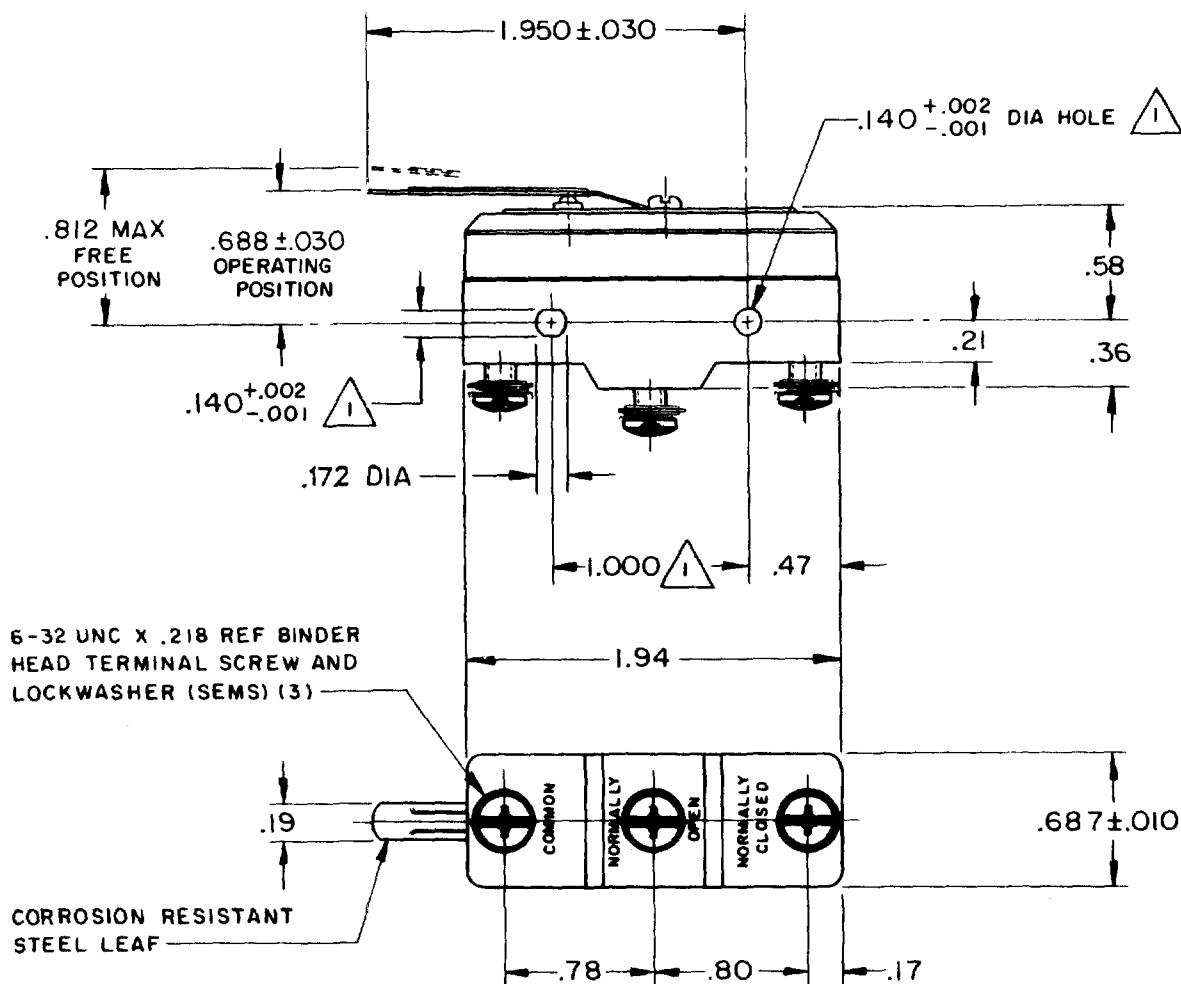

NOTE

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 5 OZ MAX

RELEASE FORCE ----- 1/2 OZ MIN

DIFFERENTIAL TRAVEL ----- .050 MAX

DO NOT OVERTRAVEL MORE THAN ----- .060

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/2A 125 VDC, 1/4A 250 VDC
1/8HP 125 VAC, 1/4HP 250 VAC

L288

L299 16A 250V T85 5E4

L306

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES $\pm$

WEIGHT .063 LB