

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RLT04

M8805/1-001

ISSUE 9

REPLACES

RELEASE NO.

CHECK

REVISIONS

A CO22575

R R R JAN 68

CO 22575

GFS 8 AUG 68

CO 69351-D

JWB 18 JUL 91

CNT

CHECK

26 JAN 68


LSD

CHECK

9 JAN 68

DRAWN

FO-50378-1A

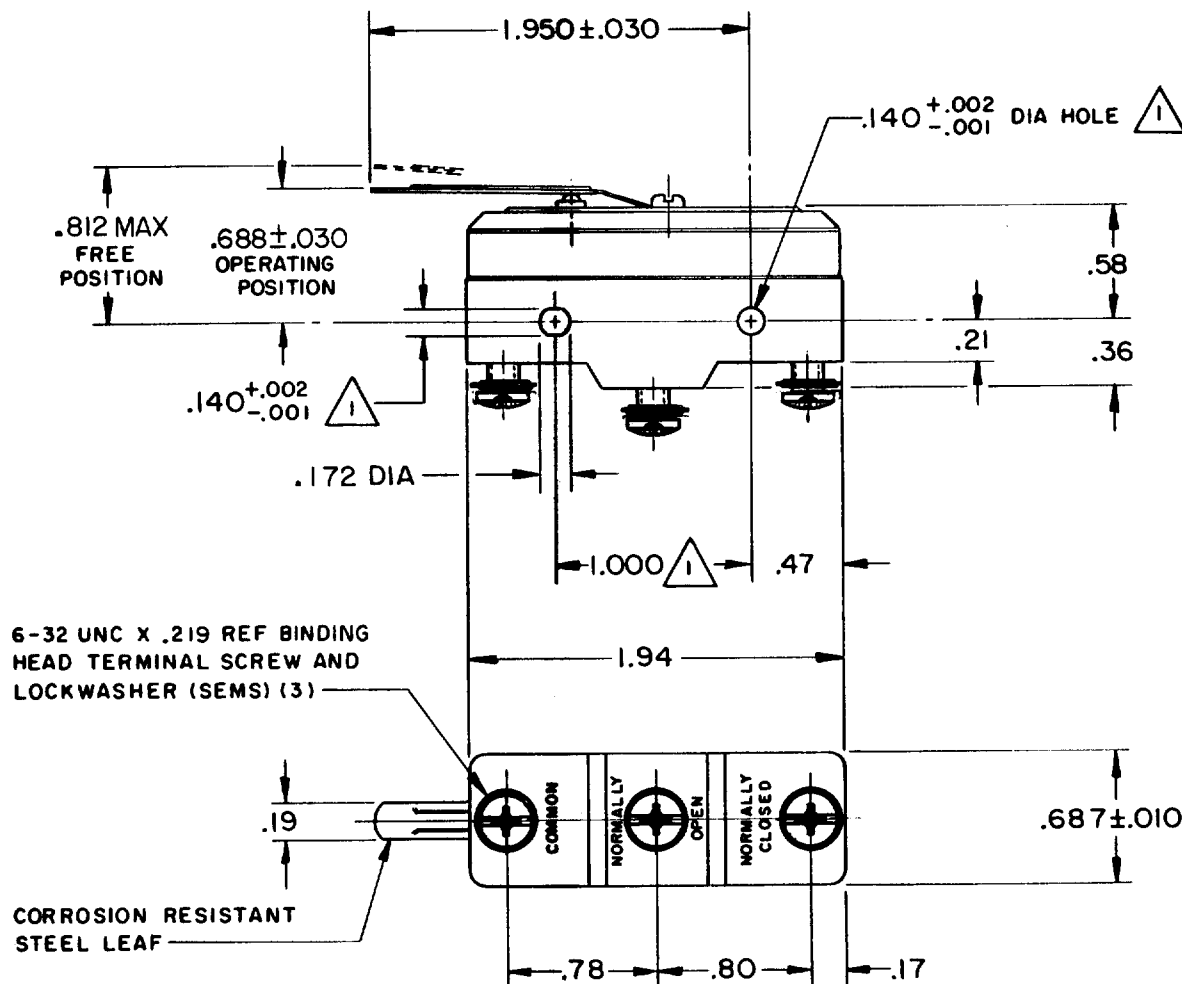

NOTE -



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — — 3.75 - 5 OZ
PRETRAVEL — — — — — .156 MAX
RELEASE FORCE — — — — — 0.5 OZ MIN

DIFFERENTIAL TRAVEL — — — .050 MAX

FOR OPTIMUM SWITCH LIFE DO NOT OVERTRAVEL
MORE THAN .060

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .063 LB