

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE #1029

SWITCH - BASIC

CATALOG LISTING

BZ-2RM-A2**BZ-2RM-A2**

PAGE 1 OF 1

MDRAWING
NUMBERISSUE
6

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO17410
B	CH
13	SEP 63
B	CO23414
M	B F
13	NOV 67
C	CO-73287-J
J	A L
22	NOV 93
D	CO-77588
TSM	
29	MAR 94
E	CO93346
DLT	
10	SEP 98

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

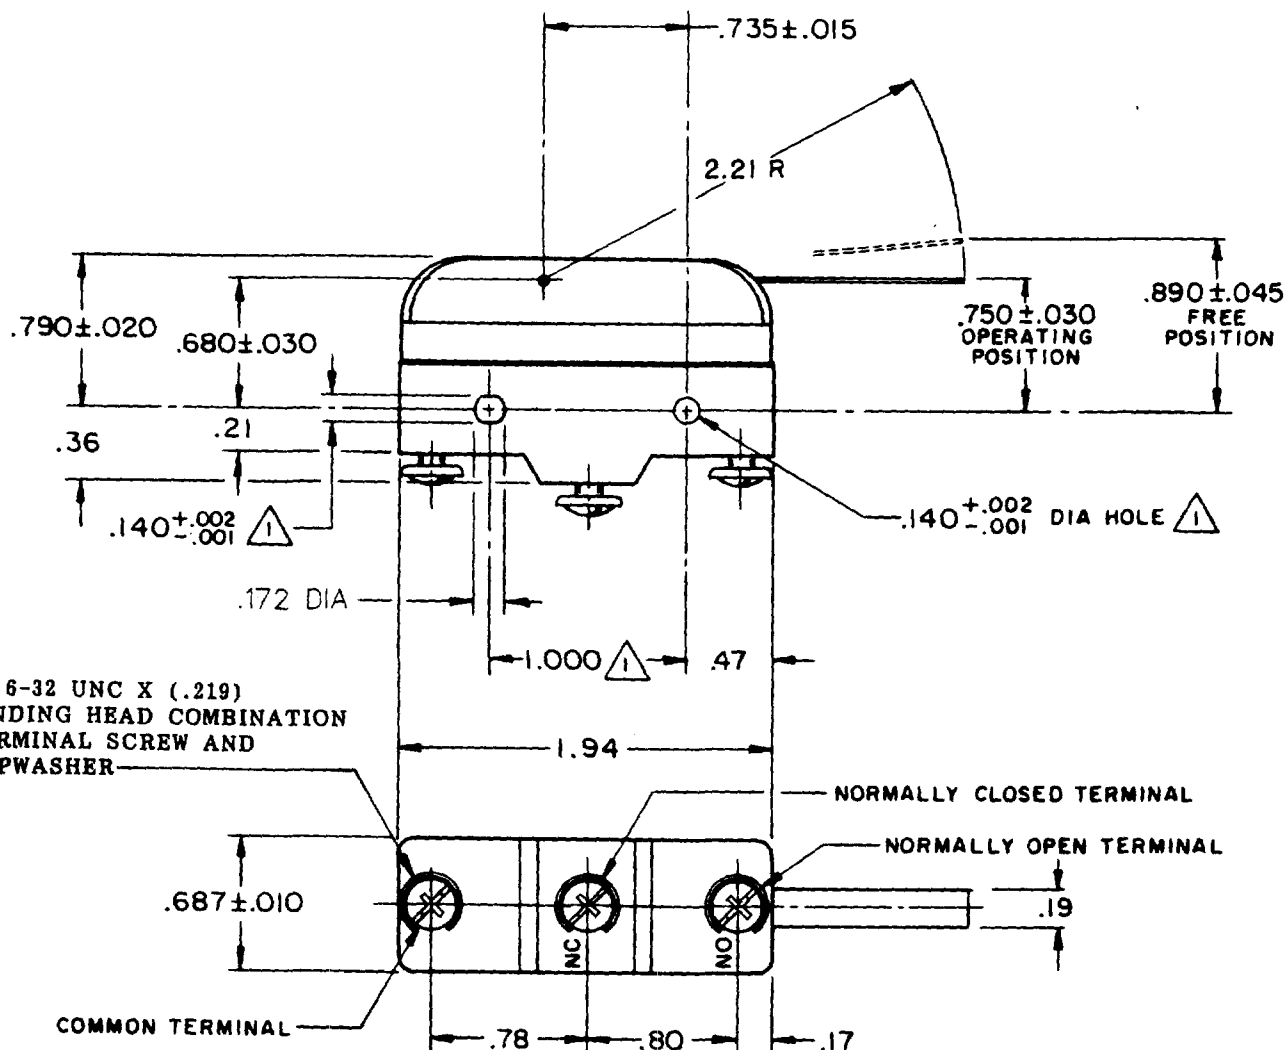
CHECK

CHECK

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

COMMON TERMINAL

NOTE

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----6 OZ MAX

RELEASE FORCE-----1 OZ MIN

PRETRAVEL-----.219 MAX

DIFFERENTIAL TRAVEL-----.004-.035

OVERTRAVEL-----.219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P D T

UNDERWRITERS' LAB. INC. LISTED RATING

-L96- 15 A-125, 250, OR 480 VAC

1/2 A-125 VDC; 1/4 A-250 VDC

1/8 HP-125 VAC; 1/4 HP-250 VAC

-L288-

-L299-

-L306-



16A 250V ~

T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .072 LB

FORMTEK

FO-50378

DRAWN

GCH 13 SEP 63