


SWITCH - BASIC

CATALOG LISTING
BZ-2RM2-A2
AKC5000

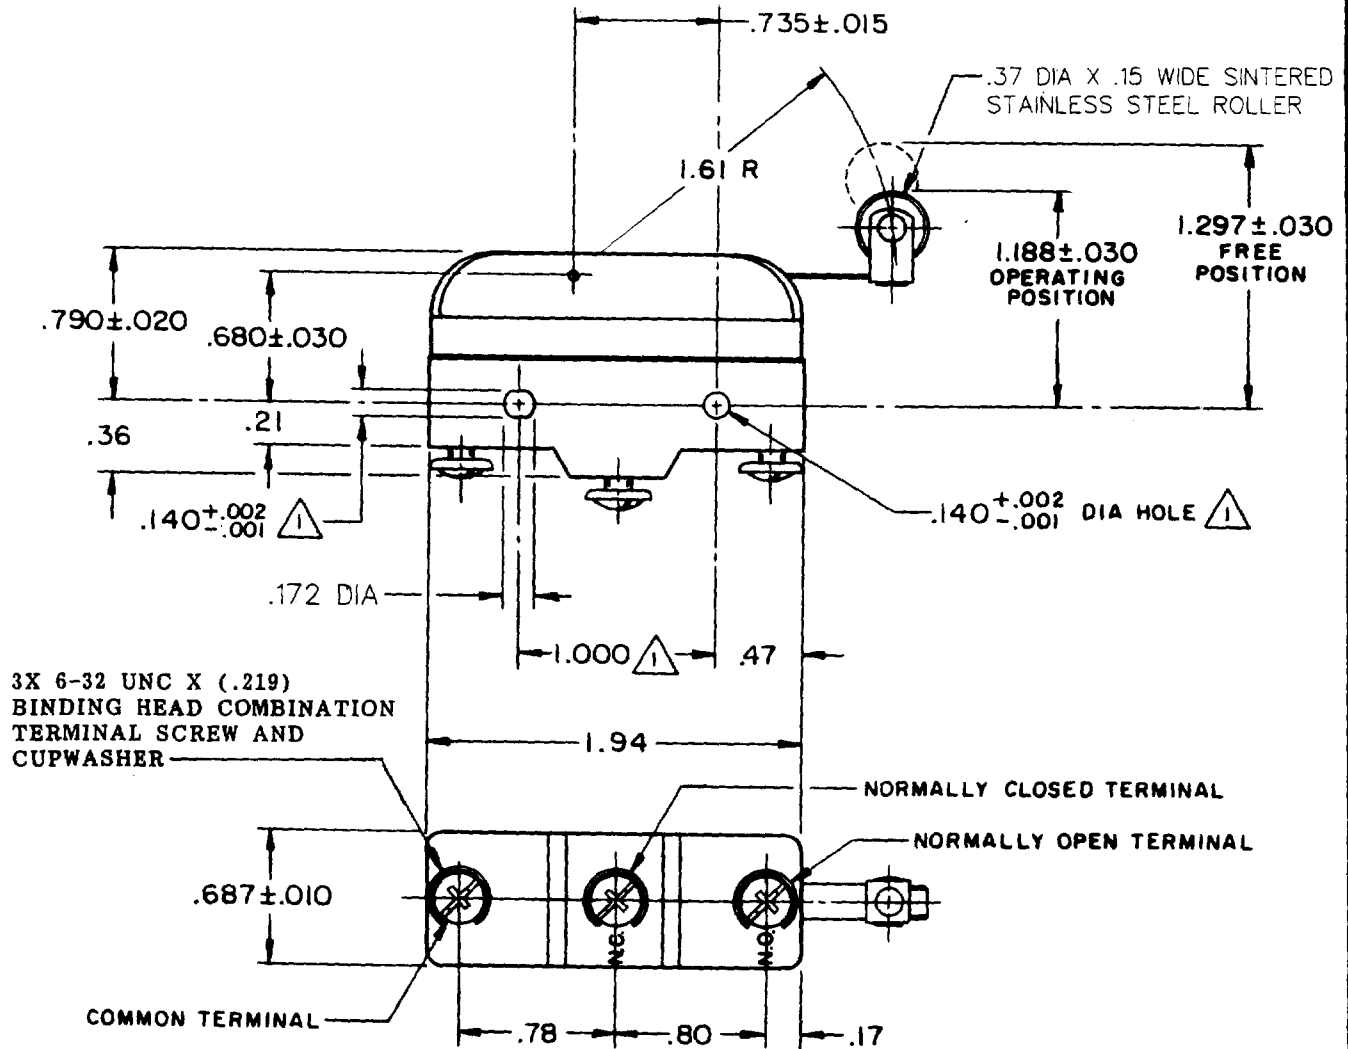

NOTE
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 8 1/2 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 2 OZ MIN	-L96- 15 A-125, 250, OR 400 VAC	UNLESS OTHERWISE NOTED
PRETRAVEL ----- .172 MAX	1/2 A-125 VDC; 1/4 A-250 VDC	DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL ----- .003-.025	1/8 HP-125 VAC; 1/4 HP-250 VAC	TOLERANCES ARE:
OVERTRAVEL ----- .156 MIN	-L288- -L306- -L315-	ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
	CE 16A 250V ~ T85 5E4	WEIGHT .077 LB

FORMTEK
FO-50376
DRAWN
GCH 16 SEP 63
CHECK
DAW 26, SEPT 63
CHECK
RJ 18 JAN 06
CHECK
TSG 18 JAN 06
CHECK
DLT 10 SEP 98
CHECK
E C093346
CHECK
TSM 29 MAR 94
CHECK
D C077588
CHECK
S A V 1 FEB 94
CHECK
C C075204-B
CHECK
J A L 22 NOV 93
CHECK
B C073287-J
CHECK
C H 16 SEP 63
CHECK
A C017410
CHECK

REPLACES
BZ-2RM2-A2
PAGE 1 OF 1
DRAWING NUMBER
7
ISSUE