


MICRO SWITCH
a Honeywell Division

FED. MF6 CODE 91828

SWITCH - BASIC

CATALOG LISTING
BZ-2RM31


**.03 THICK WASHER BETWEEN SPRING
AND COVER ON EACH SIDE**

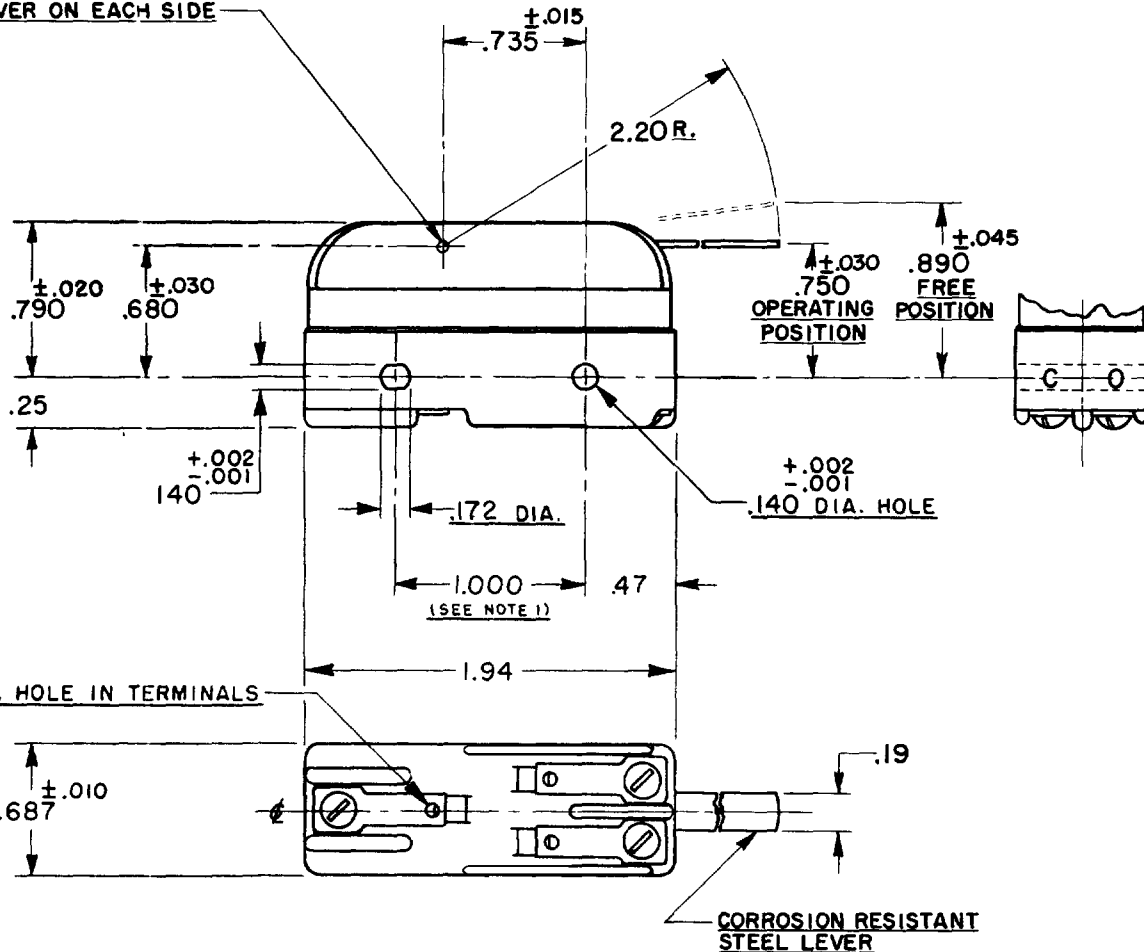

NOTE
1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX. DIA. ON 1.000 ±.002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE --- 6 OZ. MAX.	CONTACT ARRANGEMENT S. P. D. T.	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE --- 1 OZ. MIN.	UNDERWRITERS' LAB. INC. LISTED RATING	ONE PLACE (.0) ±.030	
PRETRAVEL --- .219 MAX.	-L96- 15A-125, 250 OR 480 VAC	TWO PLACE (.00) ±.015	
DIFFERENTIAL TRAVEL --- .004-.035	1/8HP-125 VAC; 1/4HP-250 VAC	THREE PLACE (.000) ±.005	
OVERTRAVEL --- .219 MIN.	1/2A-125 VDC; 1/4A-250 VDC	ANGLES ±	
	-L288- -L299- -L306- 16A 250V ~ T85 5E4	WEIGHT .063 LB.	

CATALOG LISTING
BZ-2RM31
PAGE 1 OF 1
ISSUE
6

REVISIONS
A OBS
CO15938
GM
24 MAY 61
B RE-INS
PR-2538
GM
7 APRIL 72
C CO-
77591
DAW
22 JUN 94
D CO93346

DLT
10 SEP 98
E CO-
94212-L
DLM
9 FEB 00

FORMTEK
DRAWN
R. E. R. 29 AUG 56
CHECK G. C. S. 4 SEPT 56
CHECK G. C. S. 10 SEPT 56
RELEASE NO. PR-2538