

REVISIONS

A	CO-73287-6	GRT	28 OCT 93	19 JAN 06
B	CO-75367B	LJF	9 MAR 94	
C	CO-80437	KDR	30 MAR 95	RJ
D	CO-80986	LJF	7 JUN 95	CHECK
E	CO-77863	GJW	3 MAY 96	
F	CO93346	DLT	10 SEP 98	20 AUG 92
G	0018004	TSG	19 JAN 06	

MICRO SWITCH
a Honeywell Division


FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RN317-P4

AKS3308

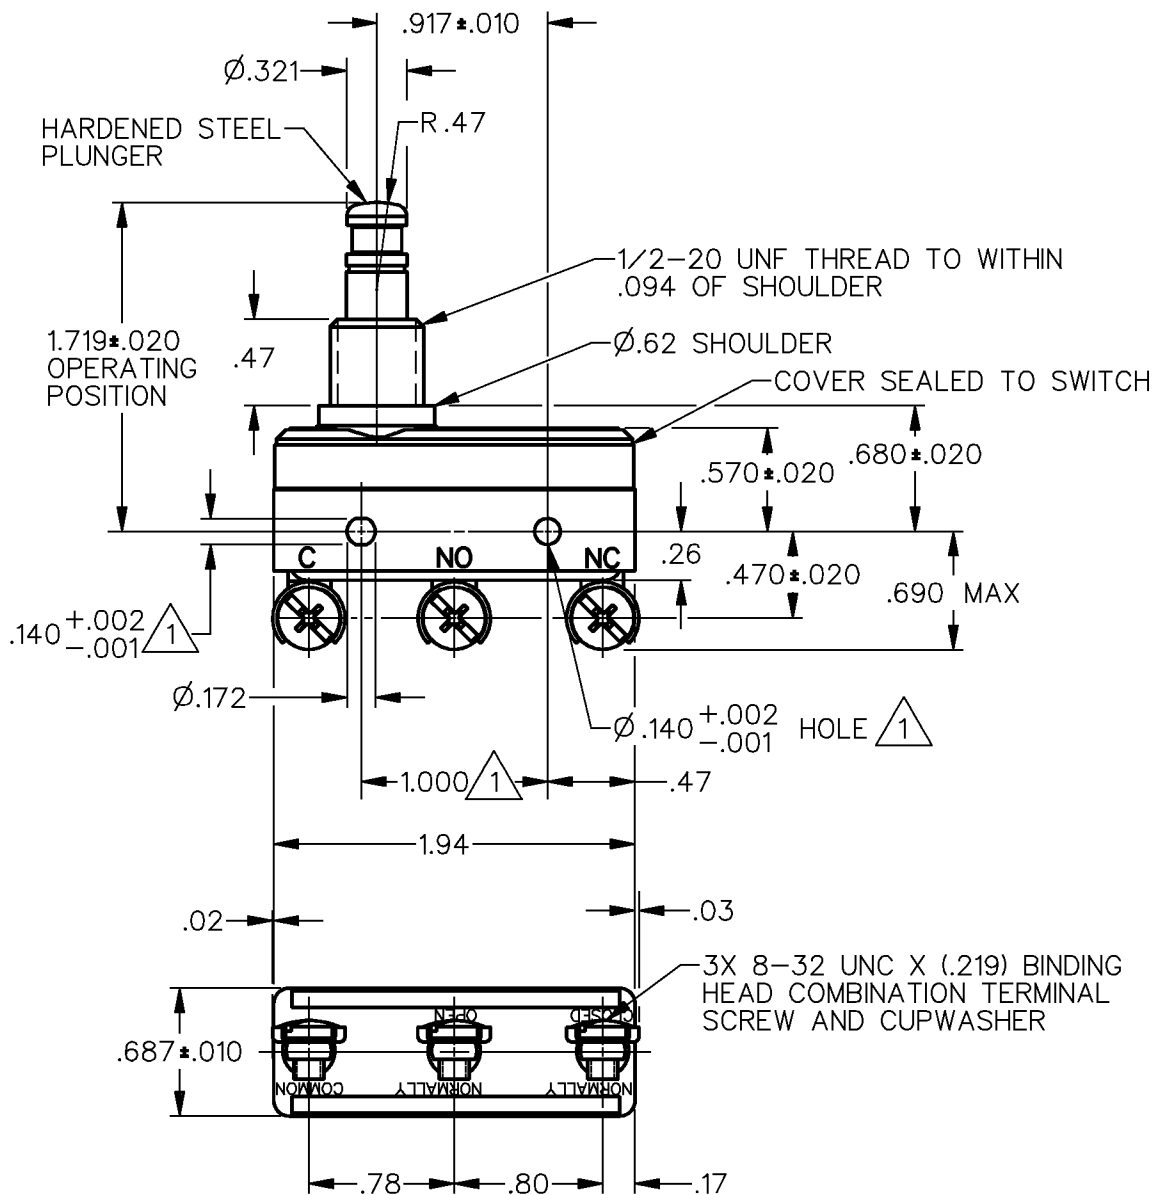


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000 ± .002 CENTERS
- 2 - 2X WASHER - LOCK INTERNAL TOOTH, NUT - SPECIAL, WASHER - PLAIN, SPRING - COMPRESSION, SEAL - COLLAPSIBLE, RING - RETAINING, AND RING - LOCK FURNISHED UNASSEMBLED

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - - - 9-13 OZ

RELEASE FORCE - - - - - 4 OZ MIN

DIFFERENTIAL TRAVEL - .0004-.0020

OVERTRAVEL - - - - - .219 MIN

FREE POSITION - - - - - 1.780 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96

15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L306
L315

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT