

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RN7T

CATALOG LISTING
BZ-2RN7T
PAGE 1 OF 1

M

ISSUE
7

REPLACES X-73319 - BZ

RELEASE NO. PR-10842

CHECK

REVISIONS

A	CO-67209
J	MAY 30
B	CO-69351-D
18	JUL 31
C	CO-77589
30	MAR 34
D	OBS DRW
8	JUL 94
E	RE-INST
20	NOV 95
F	CO93346
DLT	10 SEP 98

CHECK


6 JAN 83

FORMTEK

FO-35848-A

DRAWN

DJS 5 JAN 82

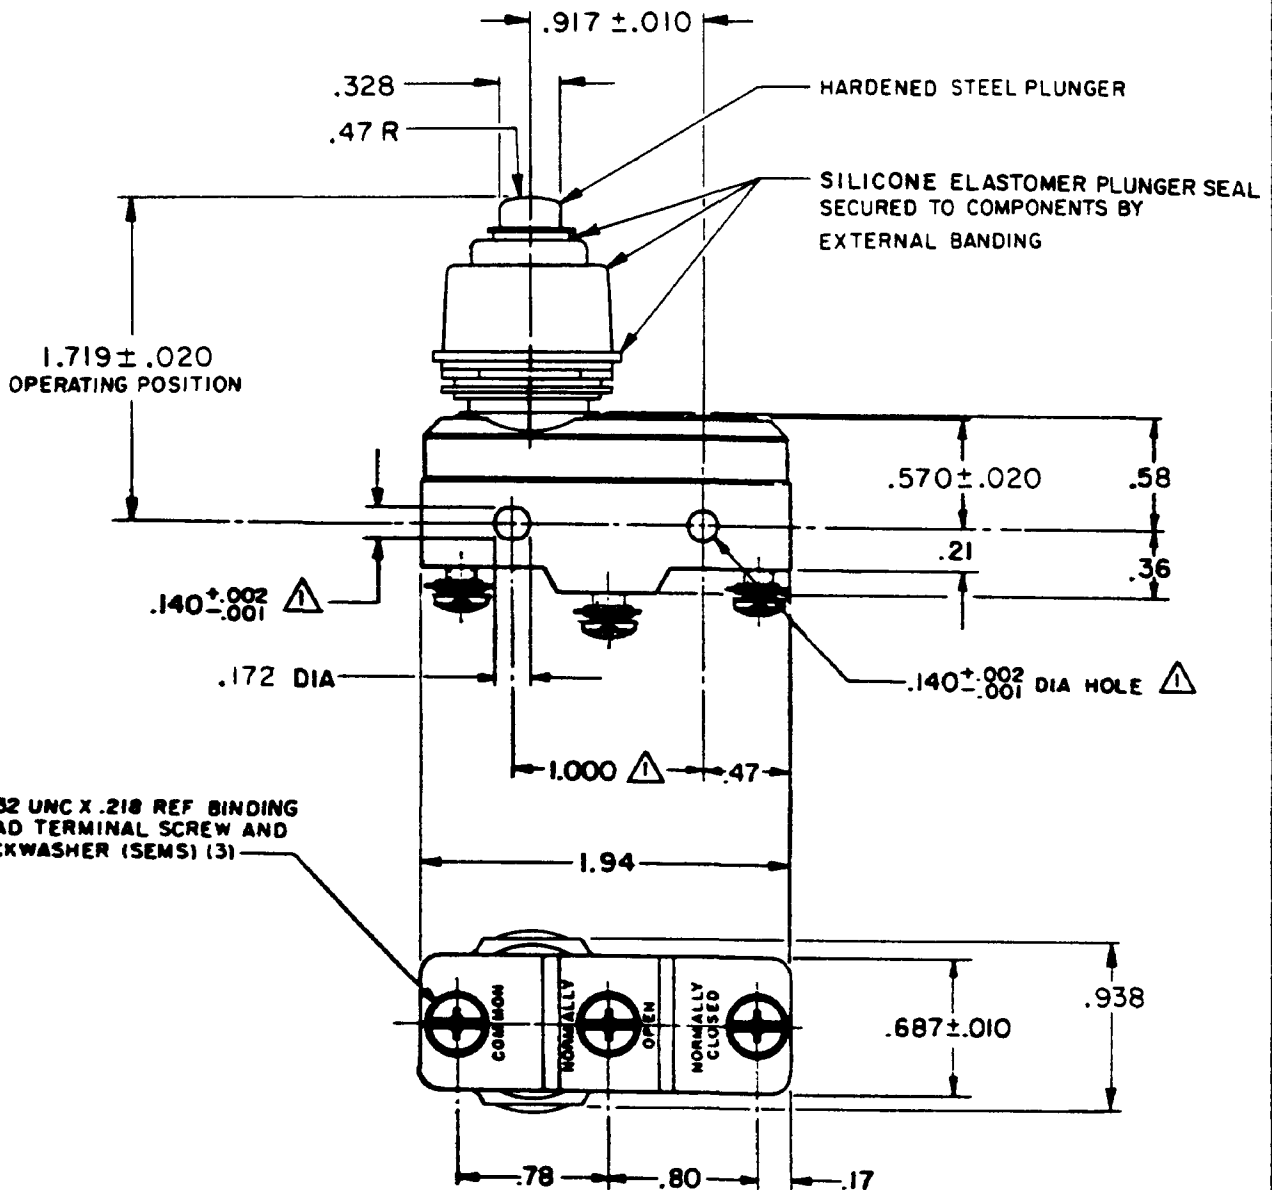


6-32 UNC X .218 REF BINDING
HEAD TERMINAL SCREW AND
LOCKWASHER (SEMS) (3)

NOTE

① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF
.139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 22-40 OZ
RELEASE FORCE ----- 18 OZ MIN
DIFFERENTIAL TRAVEL --- .0004-.0020
OVERTRAVEL ----- .219 MIN
FREE POSITION ----- 1.780 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE D A E
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED TOLERANCES ARE 2

DES	TOL	DES	TOL
NO PLACES	1/10	2	1/10
ONE PLACE	1/10	3	1/10
TWO PLACES	1/10	4	1/10
THREE PLACES	1/10	5	1/10
FOUR PLACES	1/10	6	1/10

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT