

CATALOG LISTING
BZ-2RQ1004-A2

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-20388

M

ISSUE

4

CHECK

REVISIONS

A	CO-77589	LJF	31 MAR 94
B	CO-92530	GRT	27 MAR 98
C	CO93346	D.L.T.	11 SEP 98

CHECK

NOV 92

J C

W J

CHECK


NOV 92

J W

B 4

DRAWN

DDM/CAD

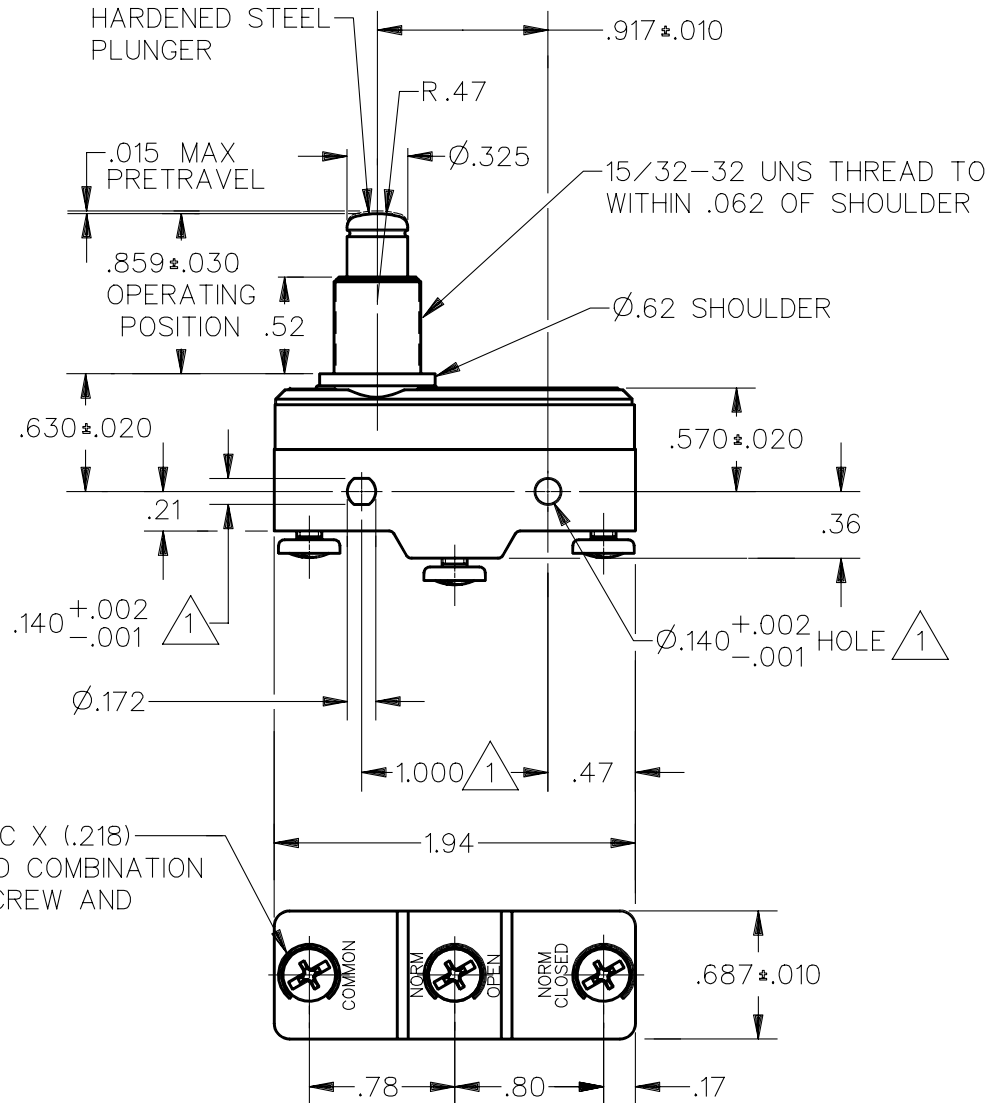


3X 6-32 UNC X (.218)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTE
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF $\varnothing .139$ MAX ON $1.000 \pm .002$ CENTERS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — — 9 — 13 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 4 OZ MIN	L96 15A 125, 250 OR 480 VAC 1/8HP 125 VAC, 1/4HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC	ONE PLACE (.0)	± .030
DIFFERENTIAL TRAVEL — .0004—.0020	L288 L299 L306	TWO PLACE (.00)	± .015
OVERTRAVEL — — — — .219 MIN	CE	THREE PLACE (.000)	± .005
	16A 250V T85 5E4	ANGLES	±
		WEIGHT .094 LB	