


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RQ1824-A2

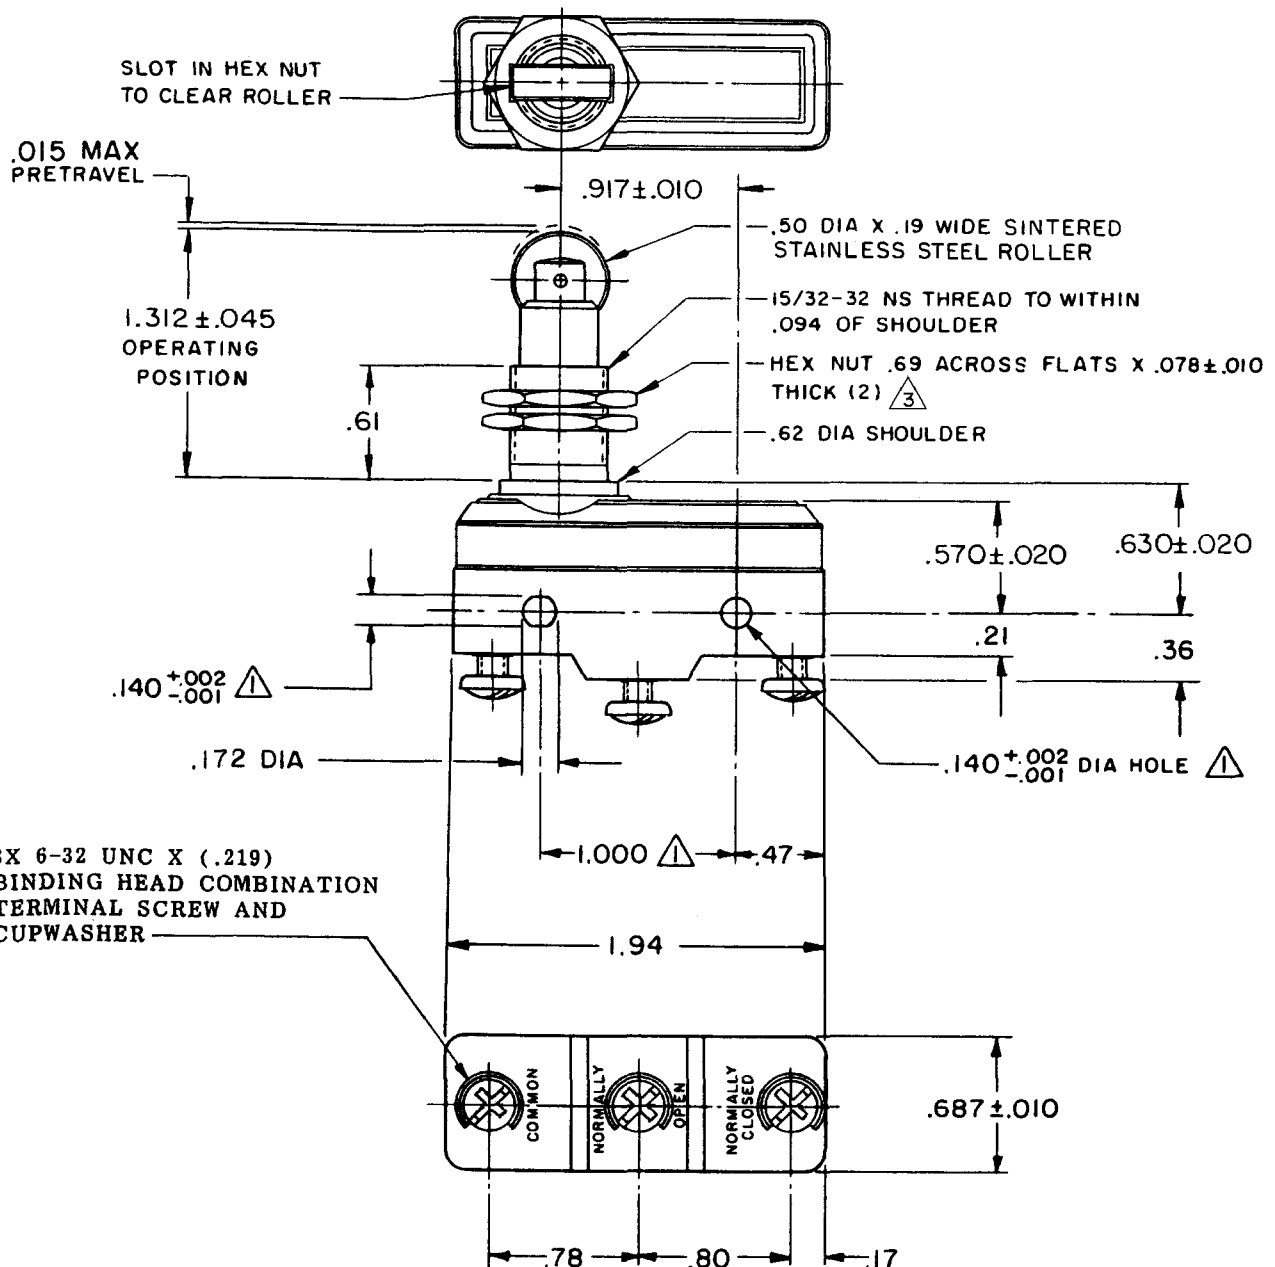

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 3 HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9-13 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ---- .0004 - .0020

OVERTRAVEL ----- .140 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UNDERWRITERS' LAB. INC. LISTED RATING

-L96- 15A-125, 250, OR 480 VAC

1/2 A-125 VDC; 1/4 A-250 VDC

1/8 HP-125 VAC; 1/4 HP-250 VAC

-L288-   

-L299- 16A 250V ~ T85 5E4

-L306-

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	± .030
TWO PLACE	(.00)	± .015
THREE PLACE	(.000)	± .005
ANGLES		±

WEIGHT

M BZ-2RQ1824-A2

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-1025

DRAWING NUMBER

6

ISSUE

REVISIONS

A	CO-73287-J	JAL	22 NOV 93
B	CO-77588	MAM	29 MAR 94
C	CO-77426-B	DLT	30 JUN 94
D	CO-82133	CSL	1 AUG 96
E	CO93346	DLT	11 SEP 98

CHECK

17 DEC 69

RFS

CHECK

18 DEC 69

CHECK

18 DEC 69

CHECK

18 DEC 69

CHECK

18 DEC 69

CHECK

18 DEC 69

CHECK

18 DEC 69

FORMTEK
FO-50378-1A

DRAWN

GCH 10 DEC 69