

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RQ241-D5

ALK7675

BZ-2RQ241-D5

PAGE 1 OF 1

Σ

DRAWING NUMBER

ISSUE

REVISIONS

A	CO- 77591
---	--------------

DAW
22 JUN 94

B C093346

DLT
11 SEP 98
CO-

C	CO- 94212E
	DCS

16 SEP 99

D 0016005
KRB
17 FEB 88

17 FEB 06
E 0033748

BS
12SEP07

--	--

--

--	--

--	--

--	--

[illegible]

--	--

11

ER

STEP 1

AWN

348 DR

0-528


FO

RASTER

50-52848

DRAWN

3	A	B	2	MAY	90	CHECK	JAF	17	EEB	06	CHECK	PSR	12SEP07	RELEASE NO. PR-18144-T	REPLACES X92114-BZ
---	---	---	---	-----	----	-------	-----	----	-----	----	-------	-----	---------	------------------------	--------------------

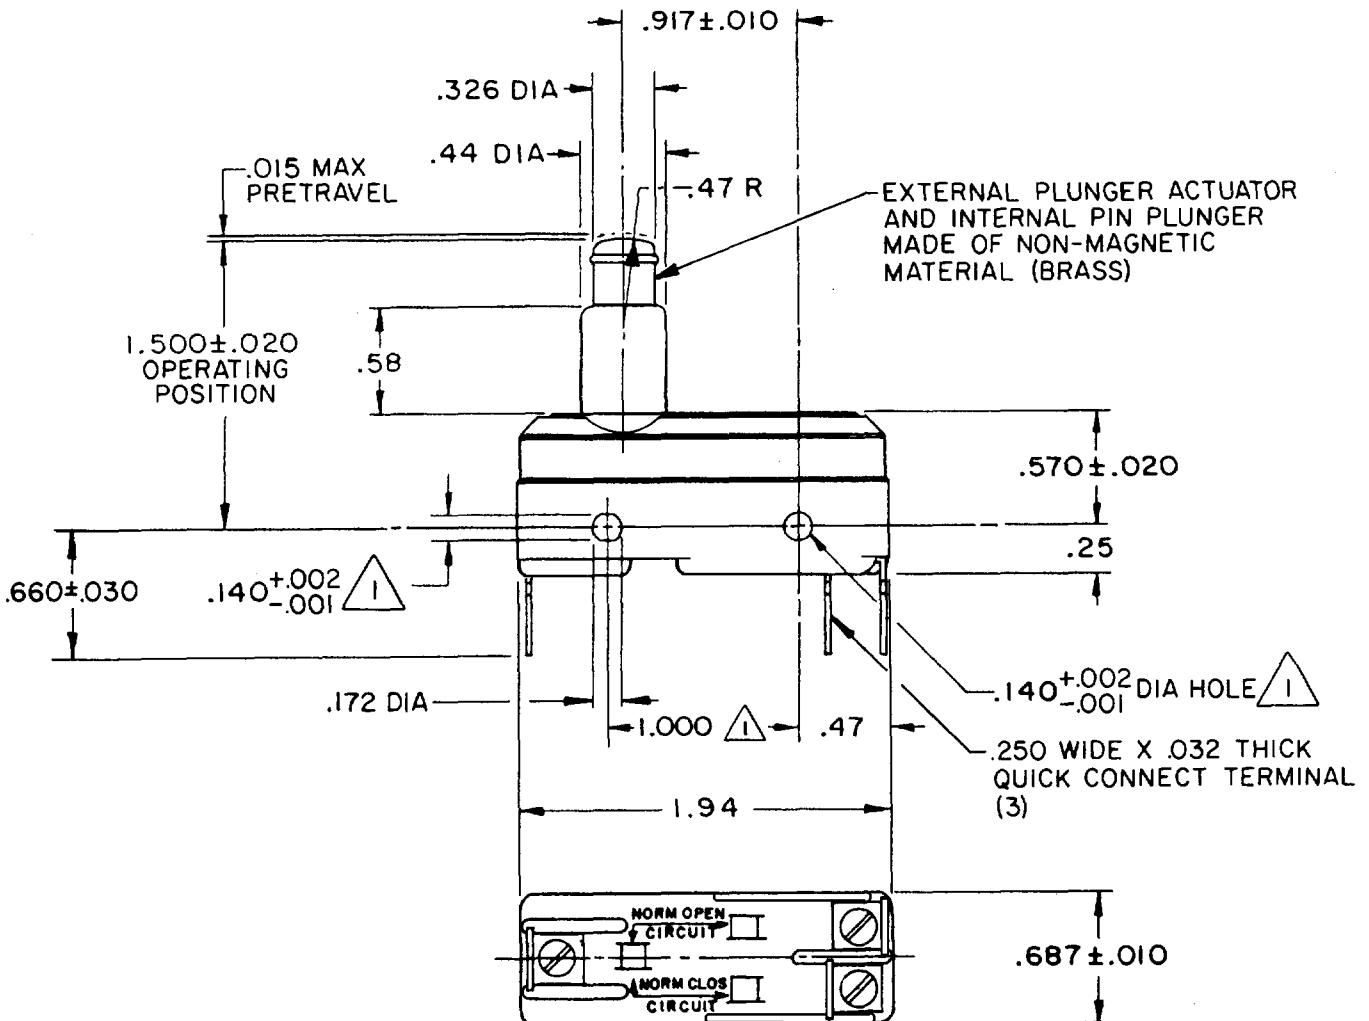

NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA
ON 1.000±.002 CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURES OF 250°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ———— 9-13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ———— 4 OZ MIN	L96 15A 125, <u>250</u> OR 480 VAC 1/8 HP 125 VAC, 1/4 HP <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC. (T)	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005
DIFFERENTIAL TRAVEL ——.0004—.0020	L288 L306 L310 L315	ANGLES ±
OVERTRAVEL ———— .219 MIN	CE  05   16A 250V ~ T85 5E4	WEIGHT .086 LB