

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RQ722-A2

ALL0350

BZ-2RQ722-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

45

ISSUE

REPLACES

RELEASE NO. CO34271

CHECK

25 NOV 05

RJ

CHECK

NOV 74

CHECK

NOV 74

CHECK

OCT 74


R E R

129

FO-52848-A

RASTER

FO-52848-A

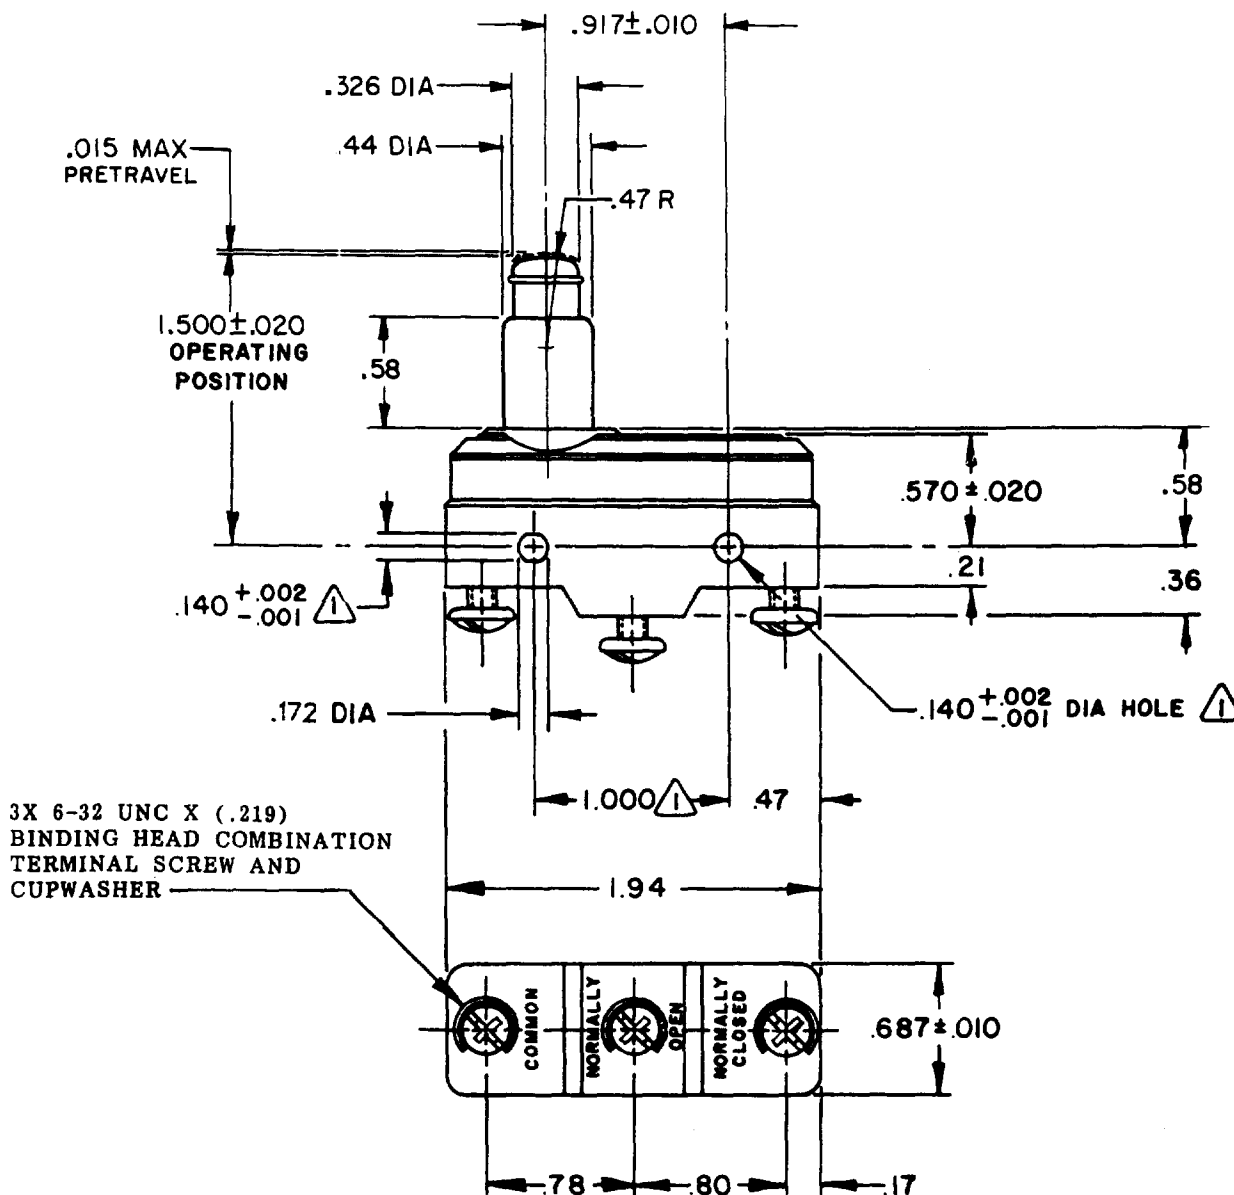


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS
- 2 - CONTACT MATERIAL-GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - - - 9-13 OZ

RELEASE FORCE - - - - - 4 OZ MIN

DIFFERENTIAL TRAVEL - - .0004 - .0020

OVERTRAVEL - - - - - .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

CODE L22 1A-125 VAC

L288
-L315-
L307



1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

NO PLACES	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
ONE PLACE	X	1/.04	X	0.01/0.25
TWO PLACES	X.X	0.01/0.10	X.X	0.001/0.01
THREE PLACES	X.XX	0.001/0.005	X.XX	0.0001/0.0005
ANGLES				

SI METRIC

US CUSTOMARY

DESIGN UNITS ☐

☒

WEIGHT .086 LB