



MICRO SWITCH

FREEDPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RQ722233-A2

BZ-2RQ722233-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

6

ISSUE

REPLACES X90395-BZ

RELEASE NO. PR-18241

CHECK

REVISIONS

A	CO68526	J A P	28 SEP 90
B	CO-73287-J	J A L	22 NOV 93
C	CO-77589	K D R	29 MAR 94
D	CO-82133	CSL	2 AUG 96
E	CO93346	DLT	19 AUG 98

CHECK

12 MAY 90

12 MAY 90


CHECK

12 MAY 90

CHECK

12 MAY 90

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

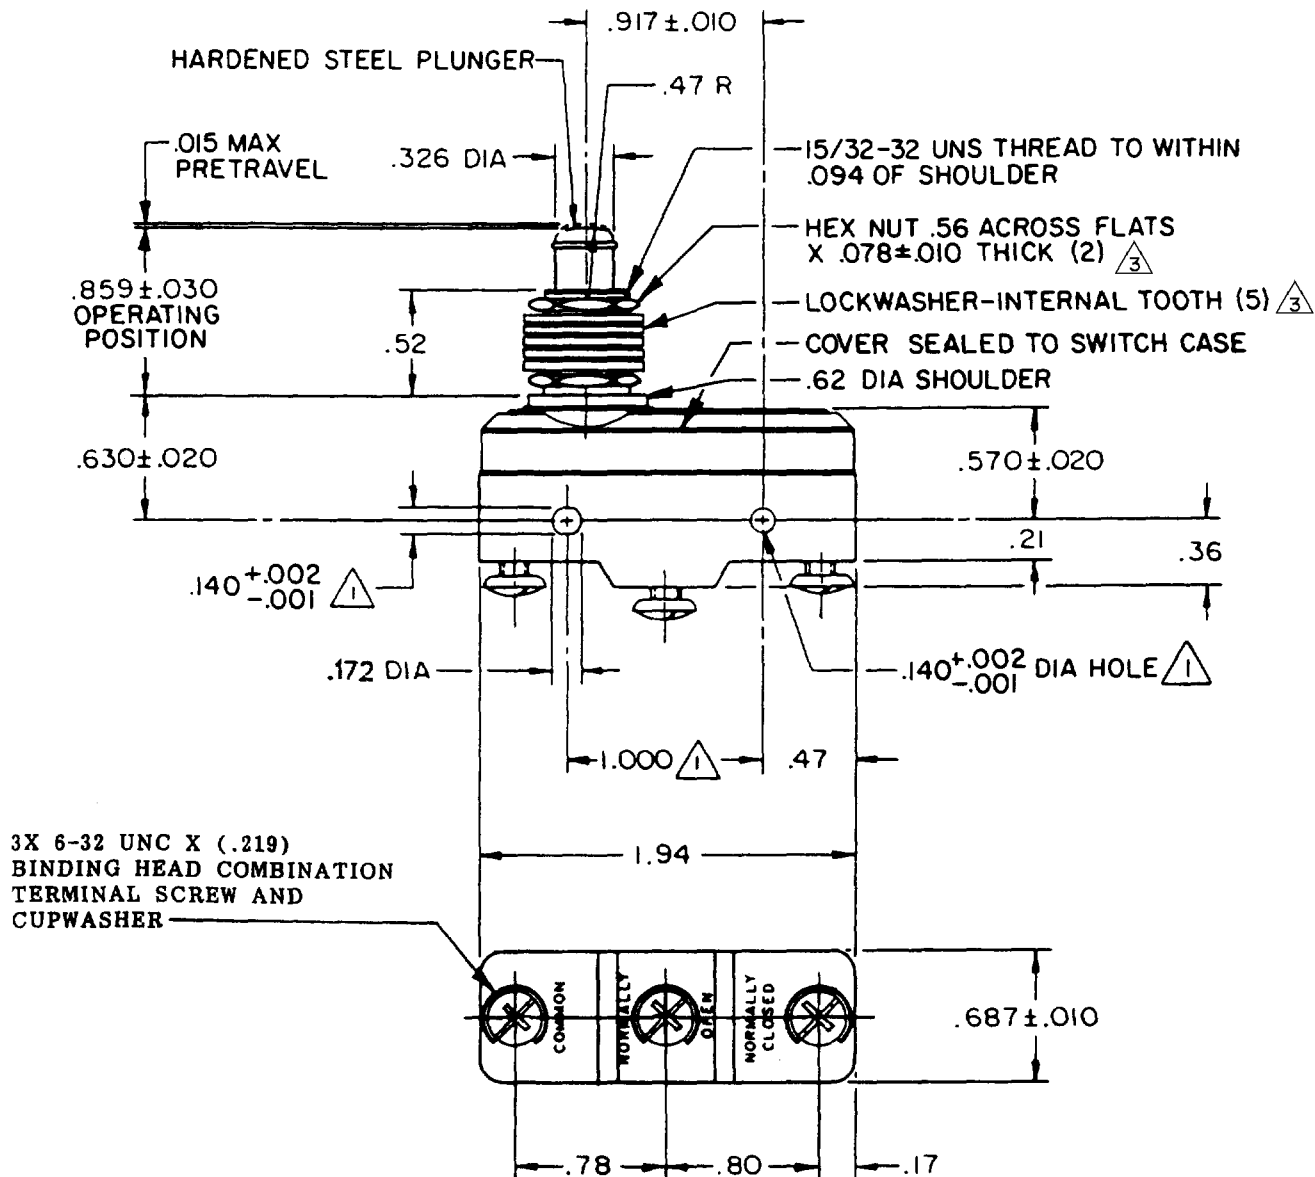

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 CONTACT MATERIAL - GOLD ALLOY
- 3 HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 9 - 13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	L22 1A 125 VAC	UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL ----- .0004 - .0020	L288 1A 250V ~ T85 25E3	DIMENSIONS ARE IN INCHES
OVERTRAVEL ----- .219 MIN	L299	TOLERANCES ARE:
	L307	ONE PLACE (.0) ±.030
		TWO PLACE (.00) ±.018
		THREE PLACE (.000) ±.008
		ANGLES ±
		WEIGHT .094 LB

FORMTEK

DRAWN

CHECK

12 MAY 90