

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ - 2RQ9 - A2**BZ - 2RQ9 - A2**

PAGE 1 OF 1

REPLACES

RELEASE NO.

DRAWING
NUMBER

6

ISSUE

CHECK

REVISIONS

A	CO17410
6 C H	11 MAY 63
M	CO19043
NEW	19 MAR 64
C	CO-73287-J
J A L	22 NOV 93
D	CO-77589
J A L	30 MAR 94
E	CO93346

CHECK

D L T
10 SEP 98

G C H 11 MAY 63

L S D 21 JUN 63

G C H 11 MAY 63

L S D 21 JUN 63

G C H 11 MAY 63

L S D 21 JUN 63

G C H 11 MAY 63

L S D 21 JUN 63

G C H 11 MAY 63

L S D 21 JUN 63

G C H 11 MAY 63

L S D 21 JUN 63

G C H 11 MAY 63


L S D 21 JUN 63

G C H 11 MAY 63

L S D 21 JUN 63

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTE
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF .139 MAX DIA ON 1.000 ± .002 CENTERS

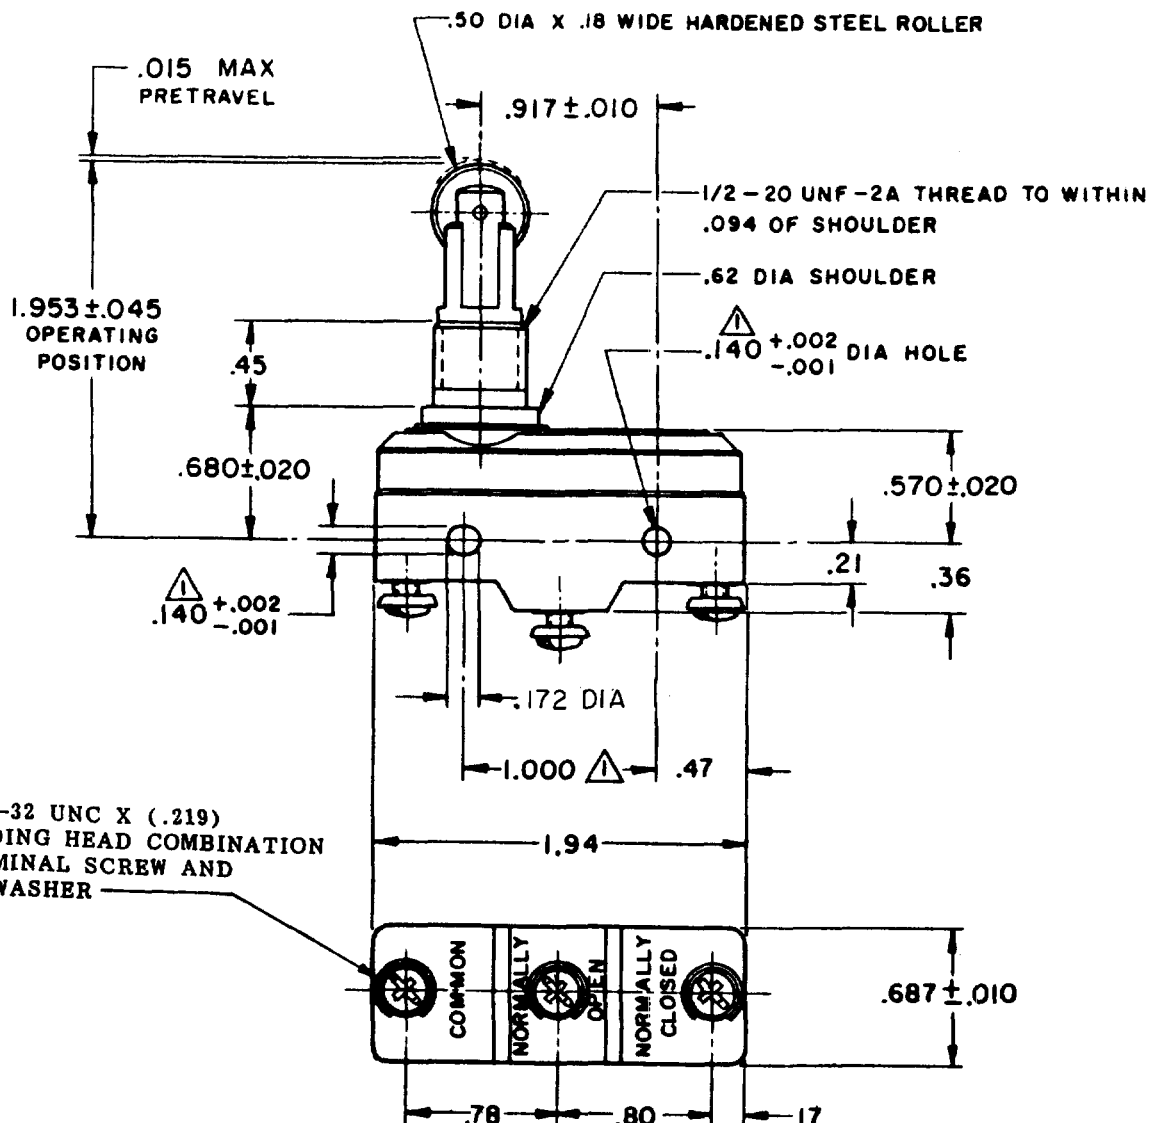

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE -----9-13 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE -----4 OZ MIN	UNDERWRITERS' LAB. INC. LISTED RATING	UNLESS OTHERWISE NOTED
DIFFERENTIAL TRAVEL-----.0004-.0020	-L96- 15 A - 125, 250, OR 400 VAC	DIMENSIONS ARE IN INCHES
OVERTRAVEL-----.140 MIN	1/2 A - 125 VDC; 1/4 A - 250 VDC	TOLERANCES ARE:
	1/8 HP - 125 VAC; 1/4 HP - 250 VAC	ONE PLACE (.0) ±.030
		TWO PLACE (.00) ±.015
		THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT

-L288-
-L299-
-L306-

16A 250V ~ T85 5E4