

MICRO SWITCH



a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RQW558-W103

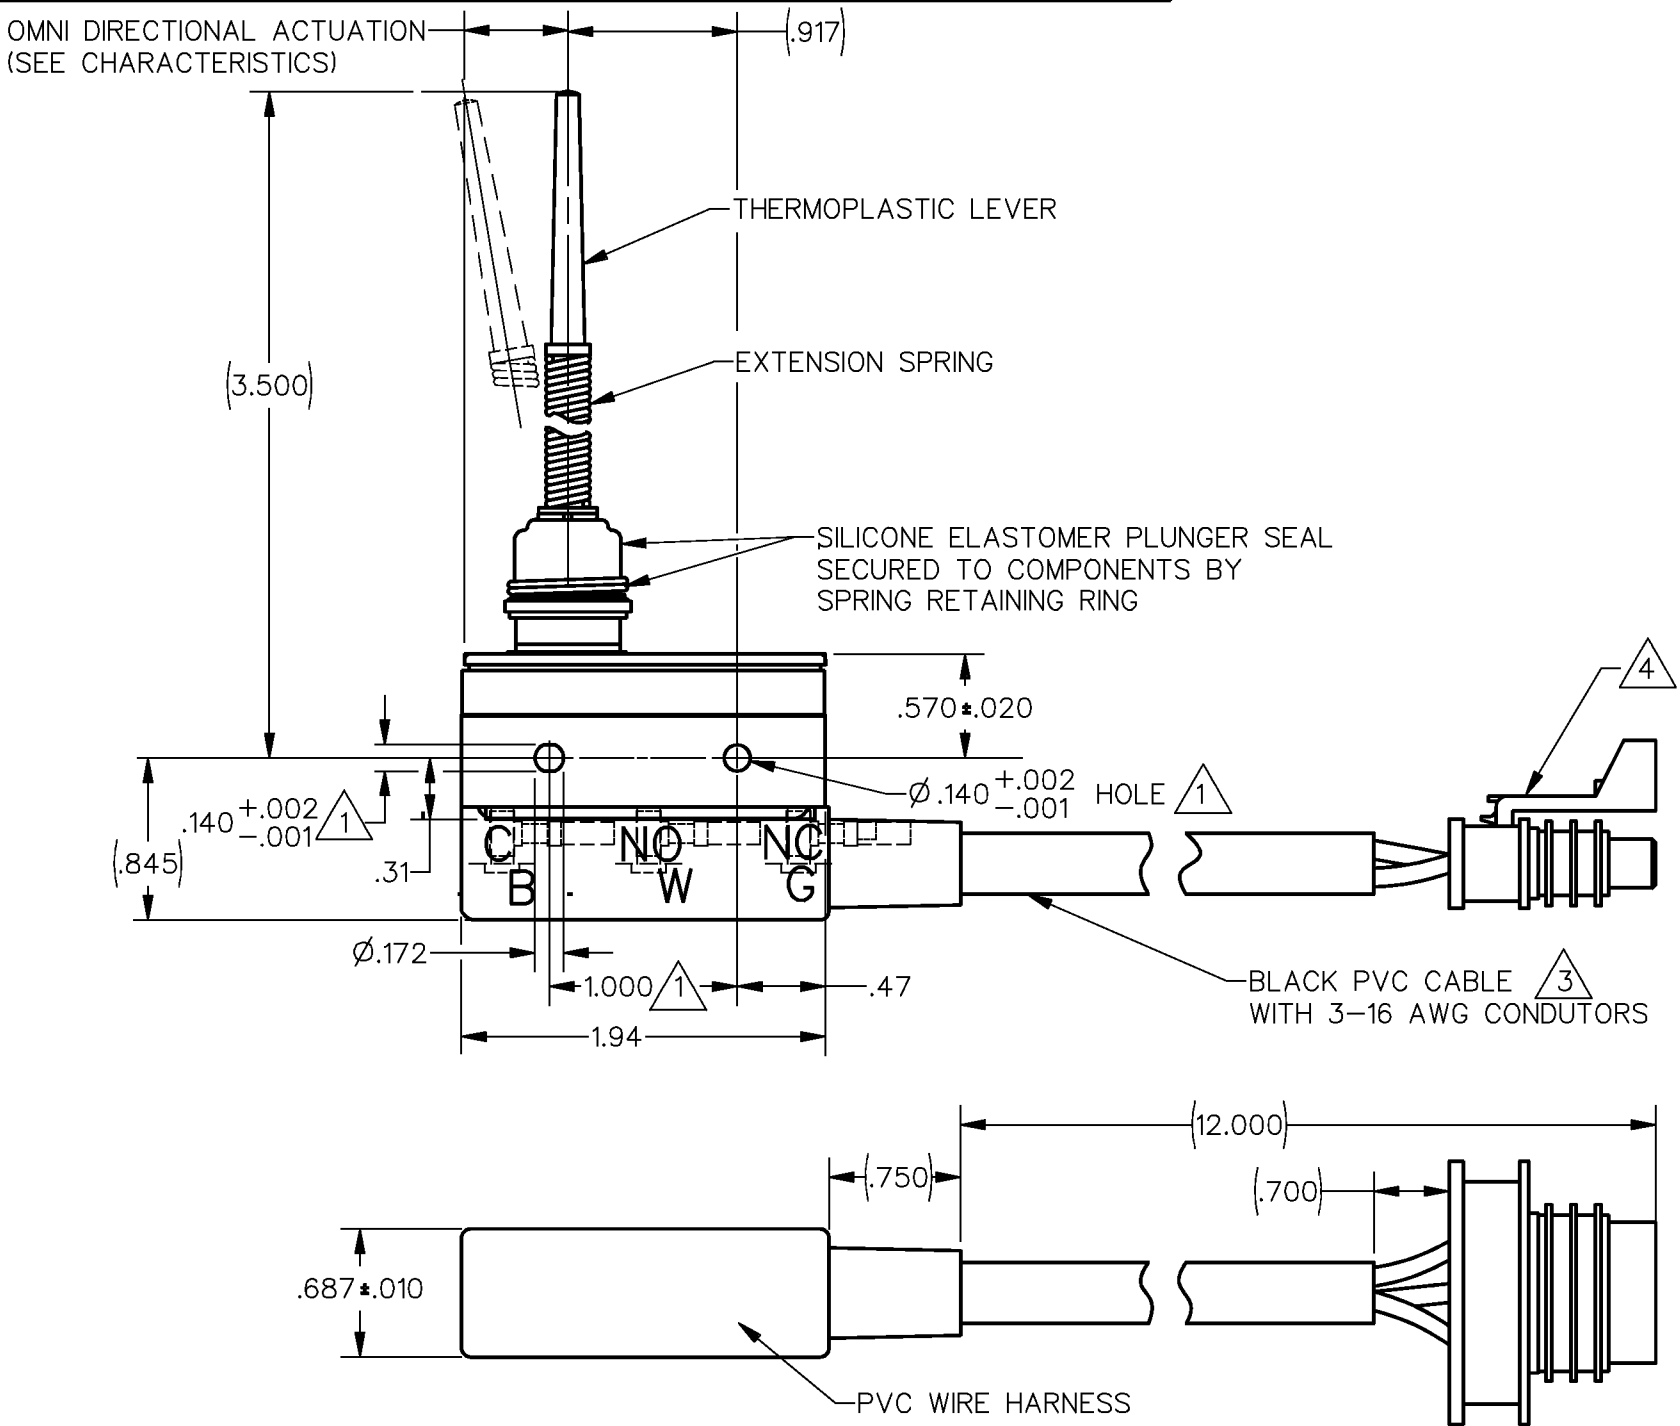

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000 ±.002 CENTERS
 - 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
 - 3 BLACK LEAD IS ATTACHED TO THE COMMON TERMINAL
WHITE LEAD IS ATTACHED TO THE N.O. TERMINAL
GREEN LEAD IS ATTACHED TO THE N.C. TERMINAL
 - 4 150 SERIES METRI-PACK CONNECTOR (PACKARD)
3 WAY CONNECTOR 12110293
3X FEMALE TERMINAL 12048074
LOCK 12052845
SEAL 12048086 OR 12052924

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH		THIRD ANGLE PROJECTION 	
CHARACTERISTICS PRETRAVEL — — — — — .500 MAX (OMNI DIRECTIONAL)	ELECTRICAL DATA		SCALE FULL
	CONTACT ARRANGEMENT S P D T		DO NOT SCALE PRINT
			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
			ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
			WEIGHT