

MICRO SWITCH


FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RS331

HARDENED STEEL PLUNGER

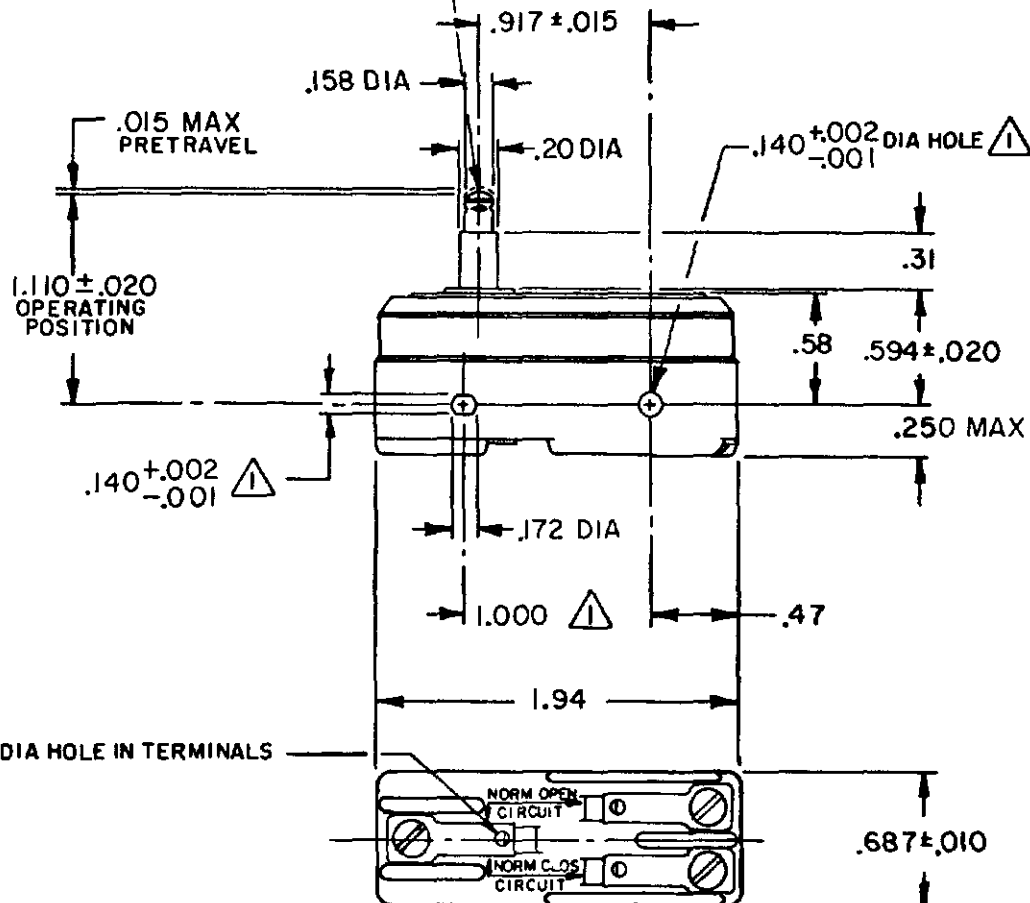


NOTE

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF $.139 \text{ MAX DIA}$ ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 9-13 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL - .0004 - .0020

OVERTRAVEL ----- 060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED-FILE E12252
CODE L96 15A-125, 250 OR 480 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC

L288

L299

L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS CONVERSIONS ARE ONLY FOR
REFERENCE UNLESS NOTED TOLERANCES ARE ±

	DIM	TOL	DIM	TOL
	IN	mm/in	IN	mm/in
NO PLACES	X	1/64	X	0.075
ONE PLACE	X X	0.001	X X	0.001
TWO PLACES	X X X	0.0005	X X X	0.0005
THREE PLACES	X X X X	0.0001	X X X X	0.0001
ANGLES				

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .050 LB

BZ-2RS331

PAGE 1 OF 1

M

DRAWING
NUMBER

15

ISSUE

REPLACES

RELEASE NO. PR-9039

CHECK

REVISIONS

A CO

38037

SMA

1 OCT 85

B CO

77591

DAW

22 JUN 94

C CO93346

DLT

11 SEP 98

D CO-

94212 -C

DLT

17 SEP 99

CHECK

FORMTEK

FO-52848-A

DRAWN

CHECK

WJM 19 JUN 80