

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RS55-A2-S

AMF4001

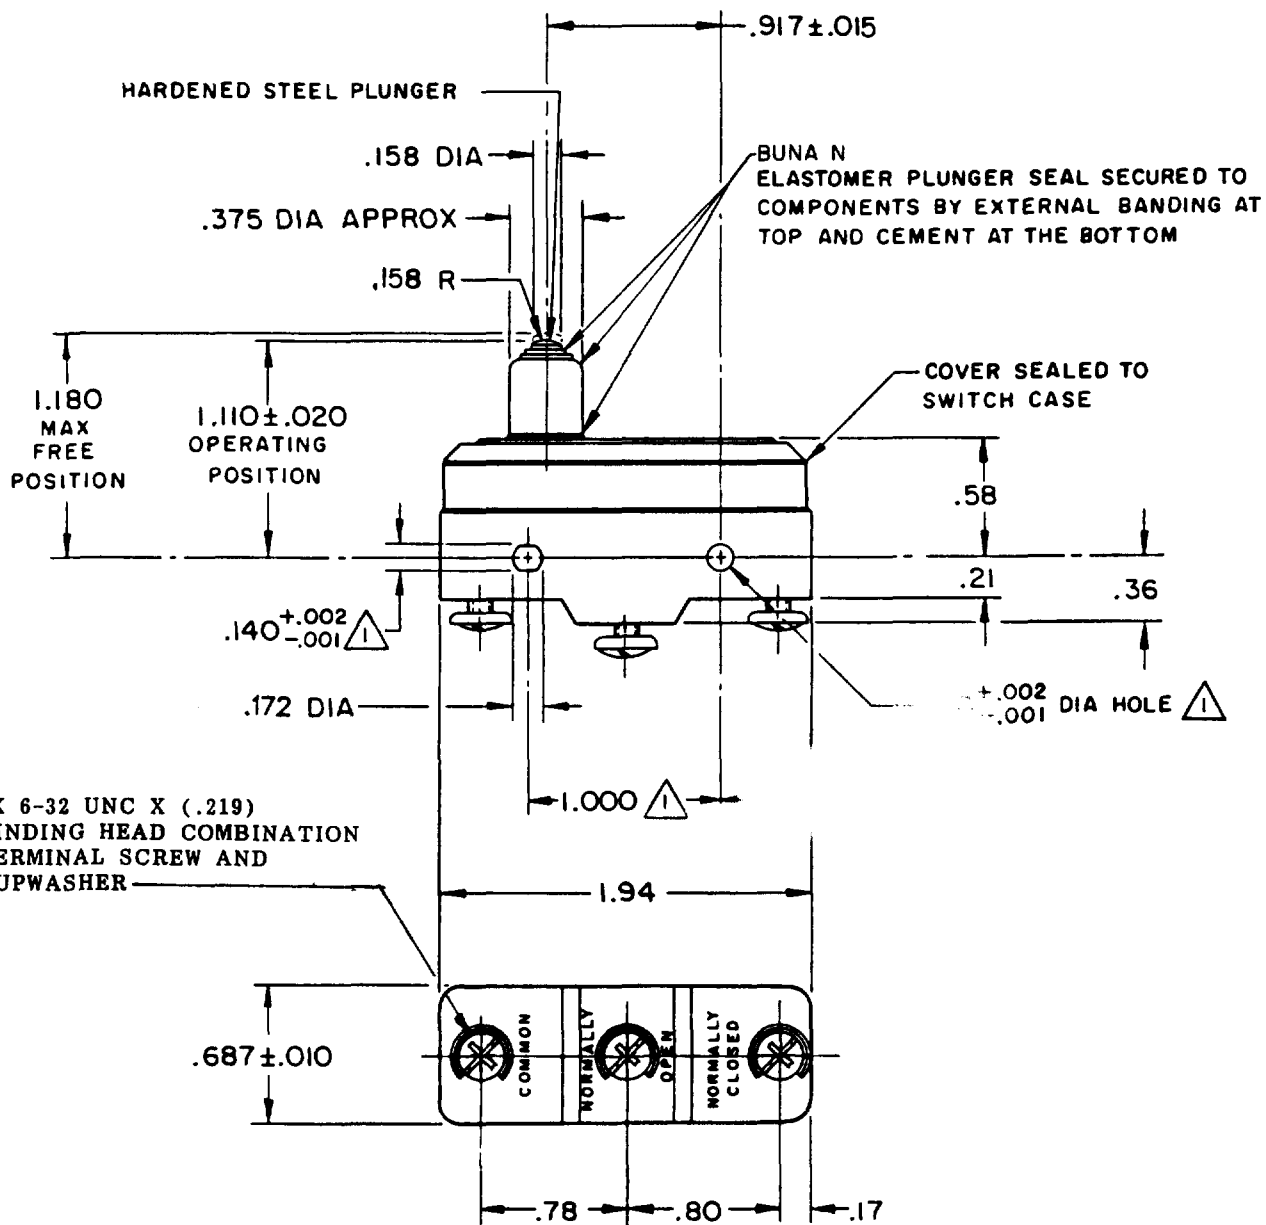

NOTE




MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX
ON 1.000 ± .002 CENTERS

2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — 9-15 OZ

RELEASE FORCE — — 4 OZ MIN

DIFFERENTIAL TRAVEL—.0004—.0025

OVERTRAVEL — — .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L306
L315



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	X	0.015
ONE PLACE	X,X	0.4/016	X,X	0.01/03
TWO PLACES	X,X,X	0.15/008	X,X,X	0.38/015
THREE PLACES	X,X,X,X		X,X,X,X	0.13/005
ANGLES				

DESIGN UNITS ☐ SI METRIC

US CUSTOMARY ☒

WEIGHT

BZ-2RS55-A2-S

PAGE 1 OF 1

M

DRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO. PR-6725

CHECK

CHECK

REVISIONS

A	CO	39621	16 DEC 77
B	CO	44156	20 APR 78
C	CO	67209	3 MAY 90
D	CO	73287	22 NOV 93
E	CO	77588	29 MAR 94
F	CO	93346	11 SEP 98
G	CO	18004	19 JAN 06

19 JAN 06

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

17 OCT 77

FORMTEK

FO-52848-A

DRAWN

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK

77 CHECK