

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RS5551-A2

BZ-2RS5551-A2

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-1027

DRAWING
NUMBER

6

ISSUE

REVISIONS

A	CO	44156	20 APR 78
B	CO	67209	3 MAY 80
C	CO	73287-J	22 NOV 93
D	CO	77589	29 MAR 94
E	CO	93346	11 SEP 98

CHECK

19 DEC 69

RFS

CHECK

19 DEC 69

LS

CHECK


15 DEC 69

FORMTEK

3-50378-1A

DRAWN

GCH

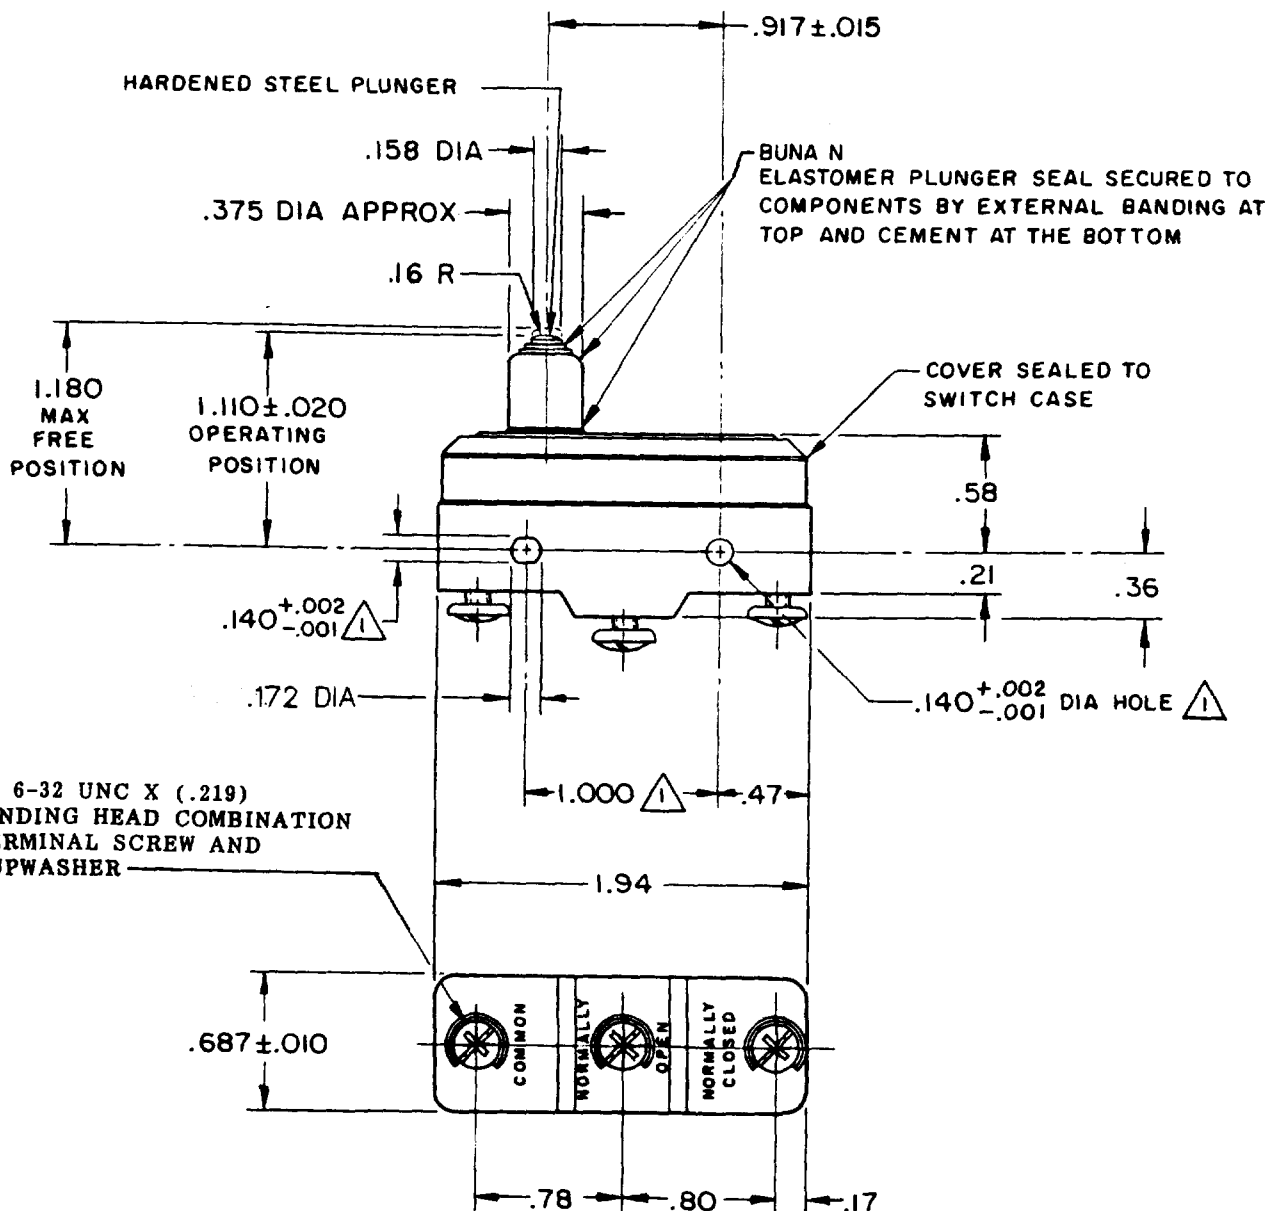

NOTE

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 9 - 15 OZ

RELEASE FORCE ----- 4 OZ MIN

DIFFERENTIAL TRAVEL ---- .0004 - .0025

OVERTRAVEL ----- .060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE Ⓢ UL Ⓢ

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.01) ± .030
TWO PLACE (.001) ± .015
THREE PLACE (.0001) ± .005
ANGLES

WEIGHT