

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RT04

AGN5000

M8805/I-004

ISSUE 8

REPLACES

RELEASE NO.

11JUL08

ASD

CHECK

REVISIONS

A

C022575

RER

5 JAN 68

B

C022575

8 AUG 68

C

C0-69351-D

JWB

18 JUL 91

D

0041585

KVS

11JUL08

CHECK

29JAN 68

LSO

CHECK

68

RE R

5 JAN 68

FO-50378-1A

RASTER

DRAWN


FO-50378-1A

RASTER

6-32 UNC X .219 REF BINDING
HEAD TERMINAL SCREW AND
LOCKWASHER (SEMS) (3)

NOTE -

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS

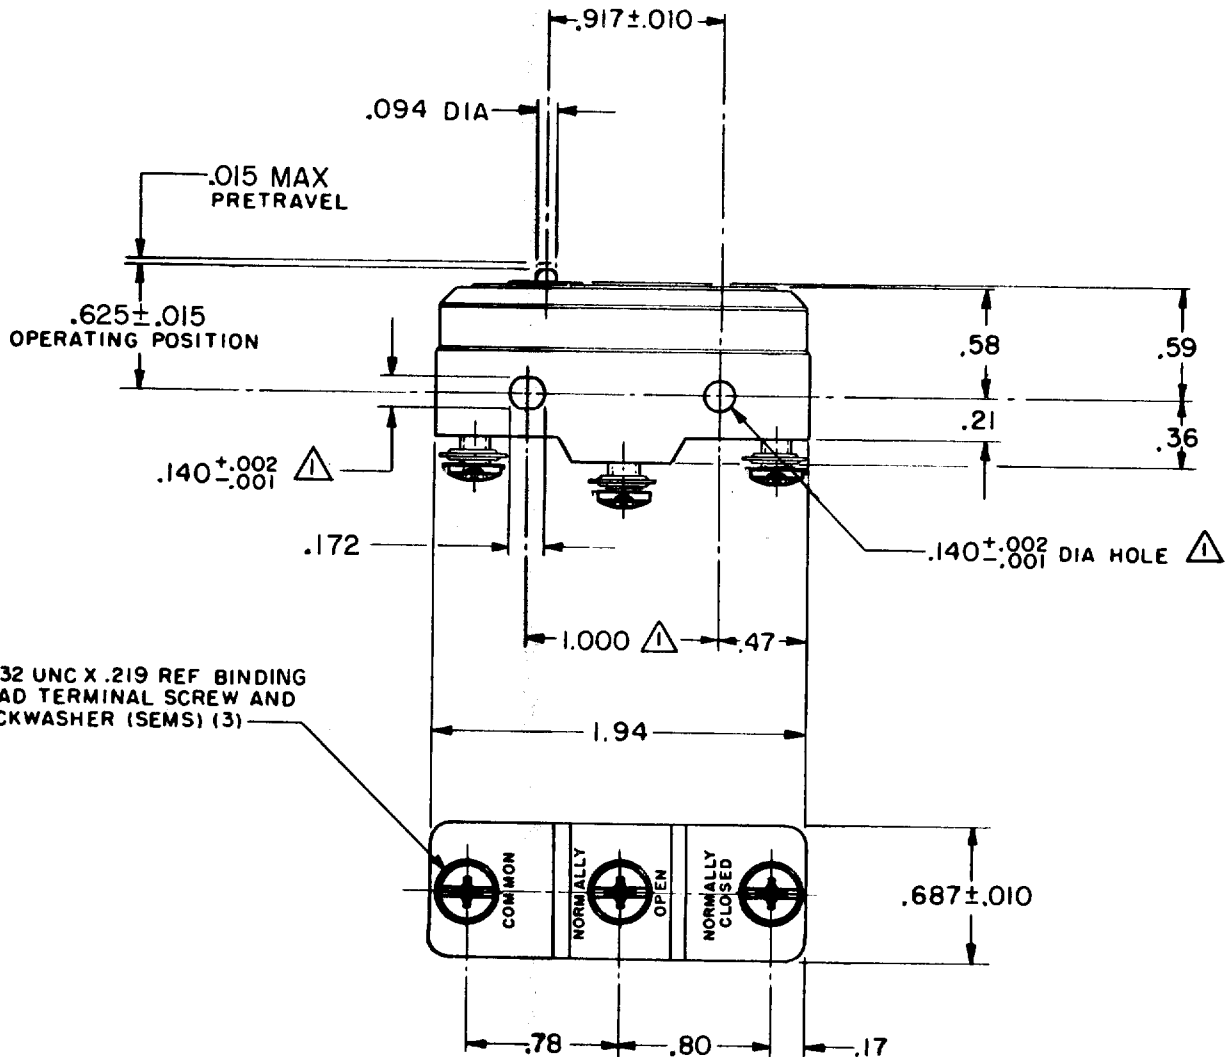

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE - - - - - 9-13 OZ

RELEASE FORCE - - - - - 6 OZ MIN

DIFFERENTIAL TRAVEL - - - .0004-.0020

OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96

15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

SCALE -

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		-

WEIGHT .063 LB

