

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW80172-A2**M BZ-2RW80172-A2**

PAGE 1 OF 1

DRAWING
NUMBER

5

ISSUE

REPLACES

RELEASE NO. SRI2203

CHECK

CHECK

REVISIONS

A CO21351

12 APR 66

B CO-73287-J

JAL

22 NOV 93

C CO-77589

MAM

29 MAR 94

D CO93346

DLT

28 AUG 98

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

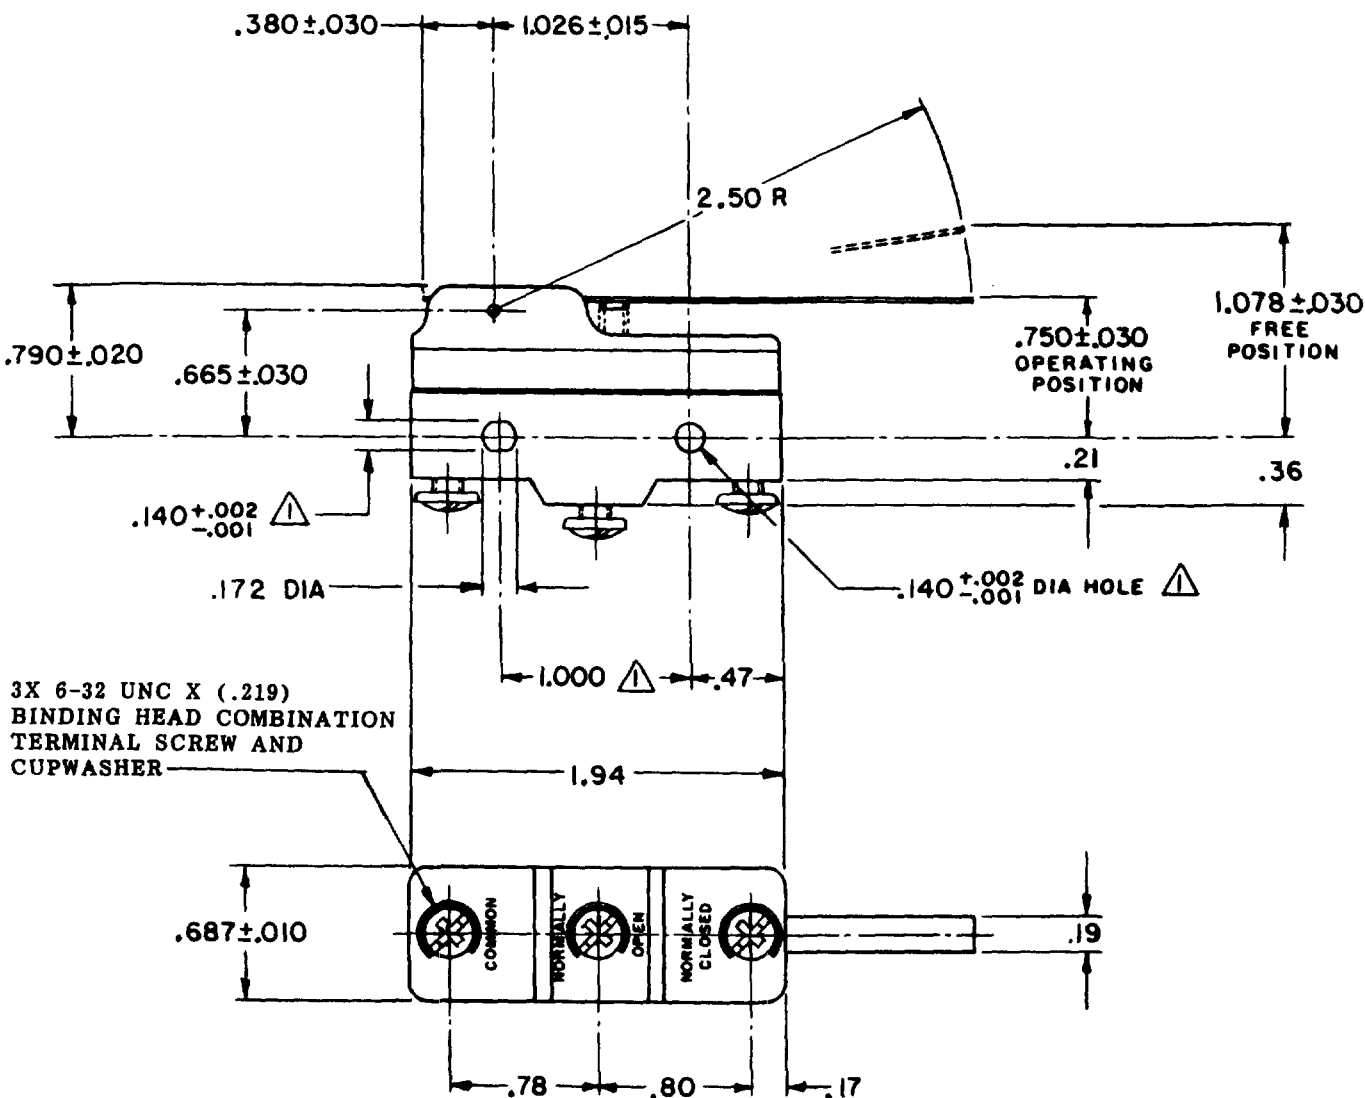

NOTE

△ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----2 1/2 OZ MAX

RELEASE FORCE-----1/2 OZ MIN

DIFFERENTIAL TRAVEL-----.007-.050

OVERTRAVEL-----.219 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D TUNDERWRITERS' LAB. INC. LISTED RATING
-L35- 5 A-125, 250 OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

-L288-



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .073 LB

FORMTEK

FO-30378

DRAWN

RDL

B

MAR

66

CHECK

CHECK

CHECK

CHECK