

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW80196-A2

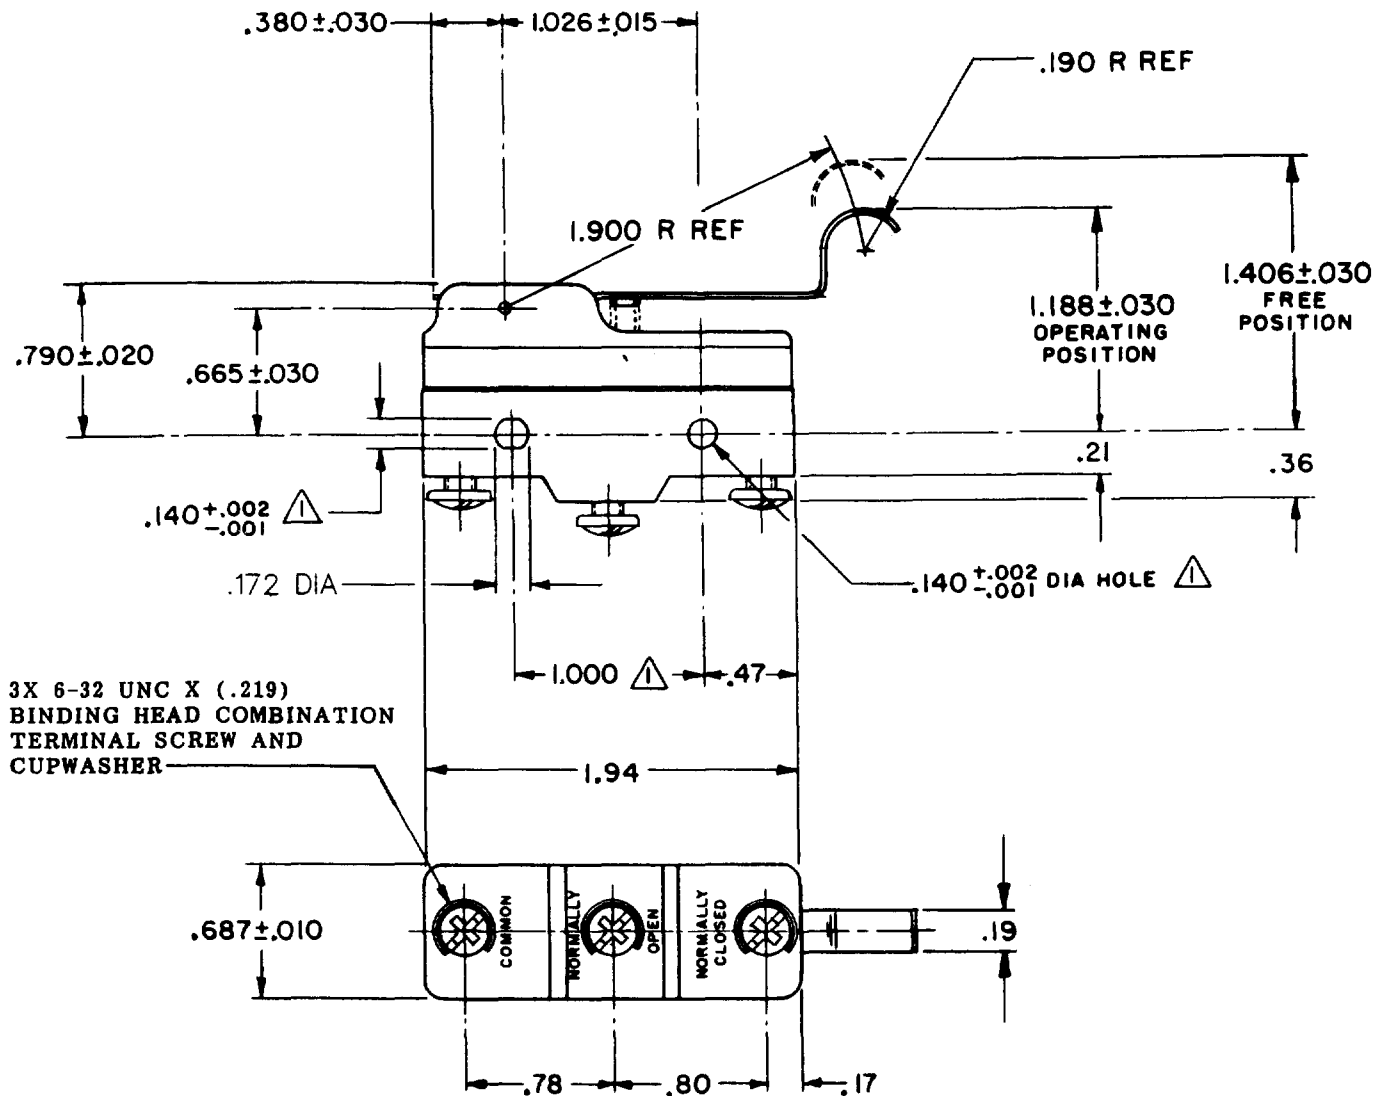

NOTE
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 3 1/2 OZ MAX
RELEASE FORCE ----- 3/4 OZ MIN
DIFFERENTIAL TRAVEL ----- .004-.040
OVERTRAVEL ----- .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T
UNDERWRITERS' LAB. INC. LISTED RATING
-L96- 15A-125, 250, OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
1/8 HP-125 VAC; 1/4 HP-250 VAC
-L288-
-L299-
-L306-
CE D SF
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES

WEIGHT .076 LB

FORMTEK
FO-50378-1A
DRAWN
GCH
10 JAN 70
CHECK
LSP
5 FEB 70
CHECK
CMT
5 FEB 70
CHECK
70
REVISIONS
C CO93346
DLT
16 SEP 98
B CO 77589
TSM
29 MAR 94
A CO-73287-J
JAL
22 NOV 93
ISSUE
4
DRAWING
NUMBER
M BZ-2RW80196-A2
PAGE 1 OF 1
RELEASE NO. PR-1032
REPLACES