

MICRO SWITCH

FREERPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW8055513-A2

S

M BZ-2RW8055513-A2

PAGE 1 OF 1

RELEASE NO. PR-10604 REPLACES X72360-BZ

DRAWING
NUMBER

7

ISSUE

CHECK

REVISIONS

A	CO-51437
2	KAG JUN 82
B	CO67209
3	JAP MAY 90
C	CO 71464
4	JWB NOV 91
D	CO 73287-E
5	DHD OCT 93
E	CO- 77589
6	MAM MAR 94
F	CO93346
7	DLT SEP 98

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

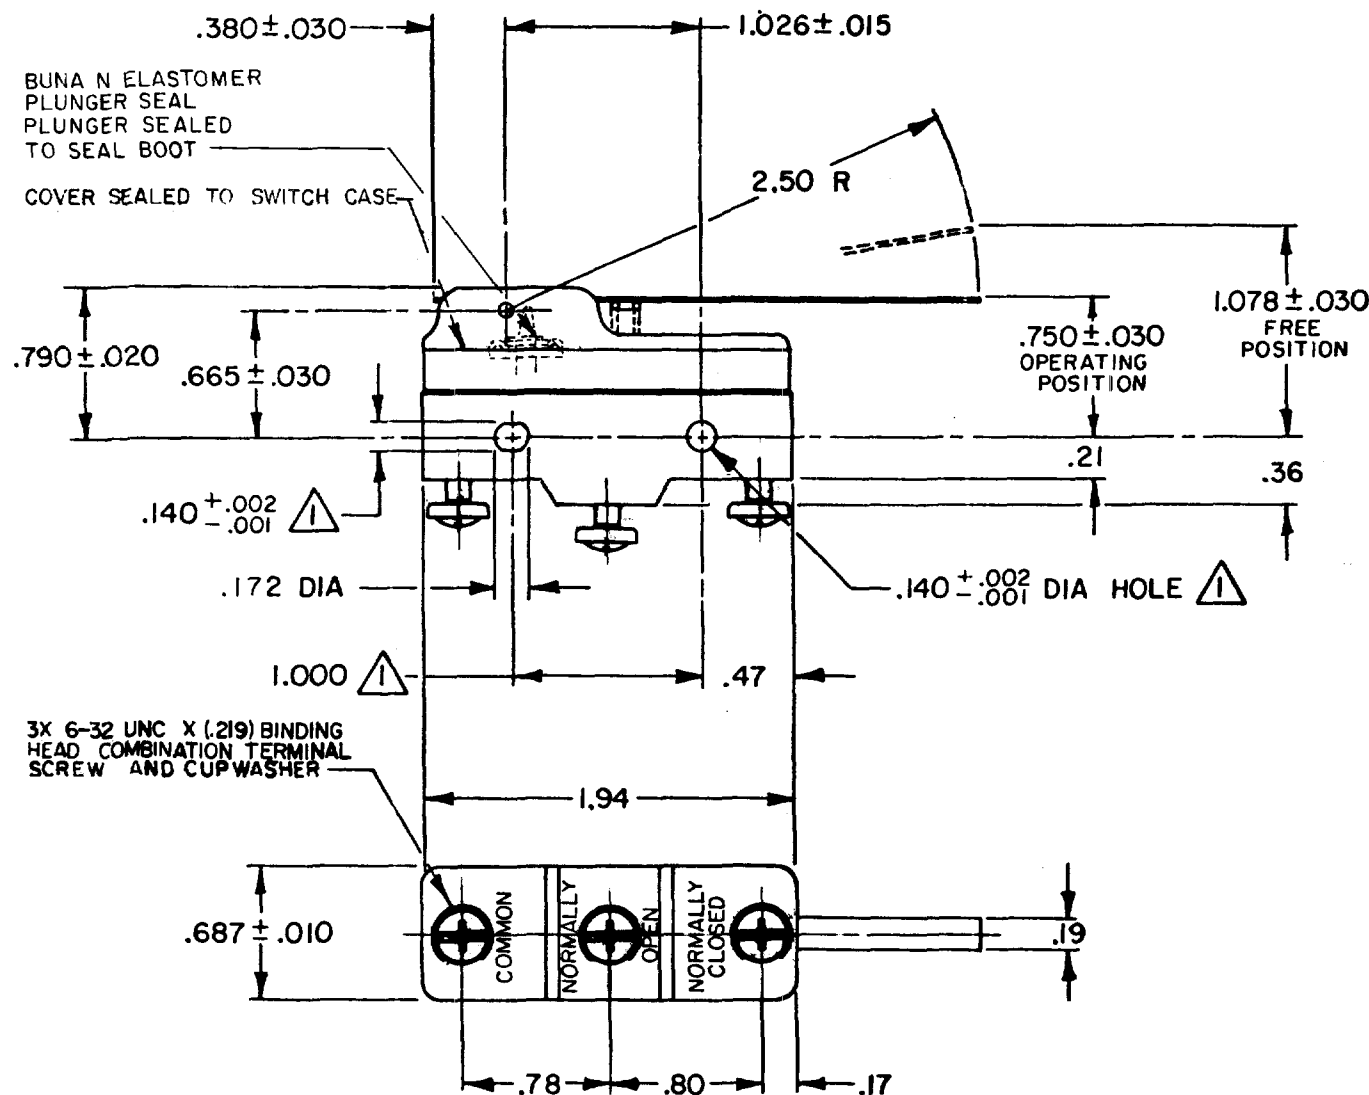


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 2 1/2 OZ MAX
RELEASE FORCE --- 1/2 OZ MIN
DIFFERENTIAL TRAVEL --- .007-.050
OVERTRAVEL --- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96
15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE D A

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	17.04	X	0.67.00
ONE PLACE	X,X	0.41.018	X,X	0.387.015
TWO PLACES	X,X,X	0.187.006	X,X,X	0.137.006
THREE PLACES	X,X,X,X		X,X,X,X	
ANGLES				

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT .073 LB

FORMTEK

FO-52848-A

DRAWN

7 OCT 81