

[illegible]

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF


Ø.139 MAX ON 1.000±.002 CENTERS

2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE	----- 3 1/2 OZ MAX	CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE	----- 3/4 OZ MIN	L96 15A 125, <u>250</u> OR 480 VAC 1/8HP 125 VAC, 1/4HP <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC		ONE PLACE (. 0) ± . 030		
DIFFERENTIAL TRAVEL	----- .004 - .040			TWO PLACE (. 00) ± . 015		
OVERTRAVEL	----- .156 MIN	L288 L299 L306		THREE PLACE (. 000) ± . 005		
		   		ANGLES ±		
		16A 250V ~ T85 5E4		WEIGHT .076 LB		

PTC / CAD 20

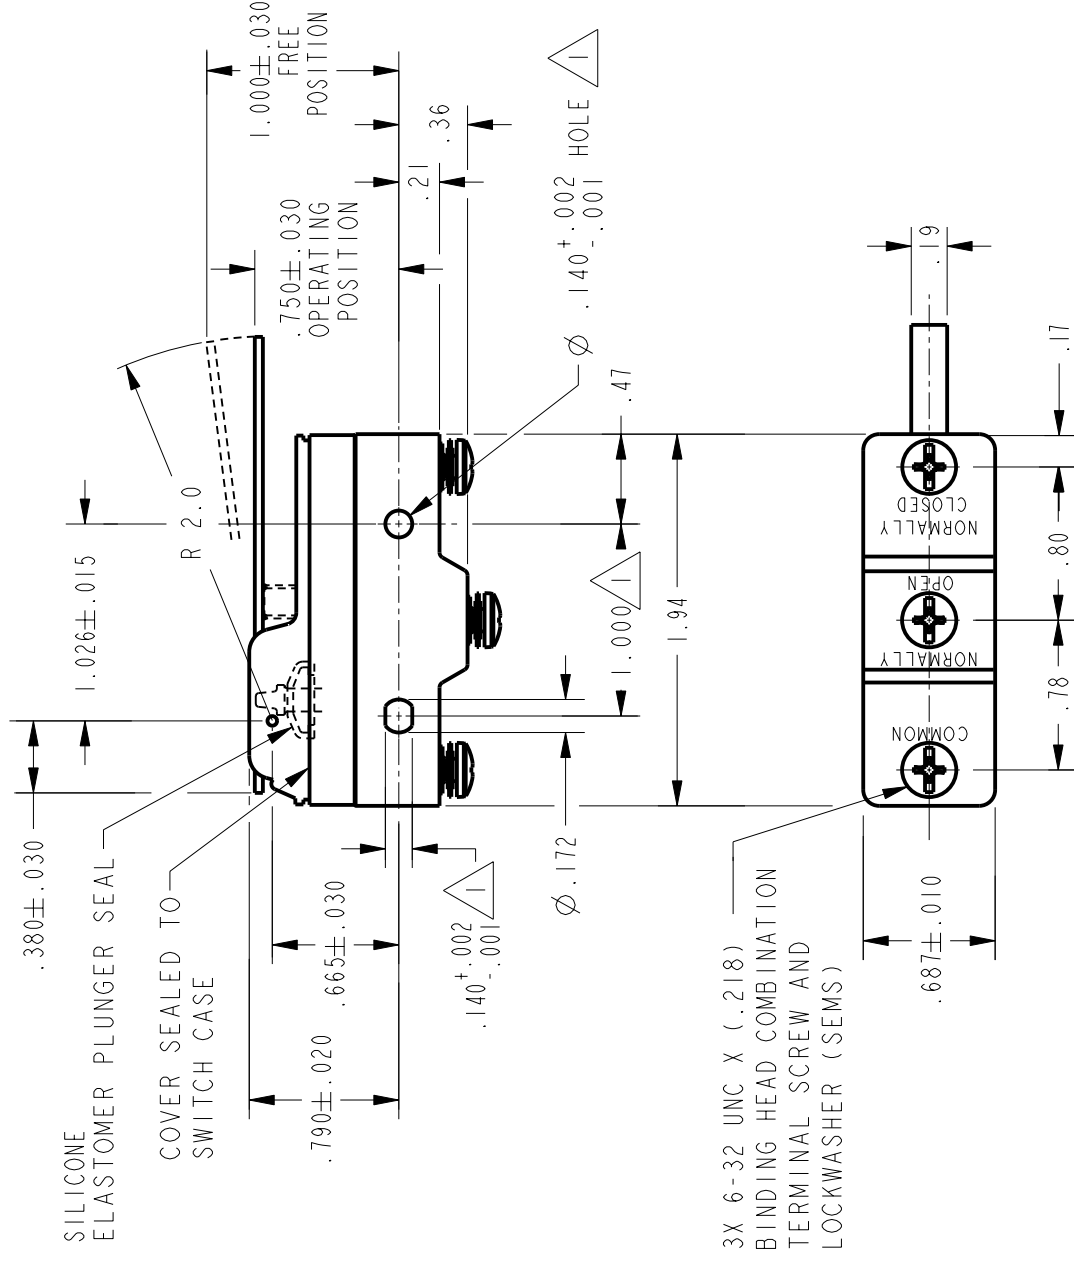

3X 6-32 UNC X (.218) —
BINDING HEAD COMBINATION
TERMINAL SCREW AND
LOCKWASHER (SEMS)