

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW8072-A2

APL2600

BZ-2RW8072-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

6

ISSUE

REPLACES

PR-1029

25 NOV 05

RJ

CHECK

28 JAN 70

CNT

22 NOV 93

CNT

29 MAR 94

CNT

25 NOV 05

28 JAN 70

LSD


CHECK

17 DEC 69

GCH

FO-50378-1A

DRAWN

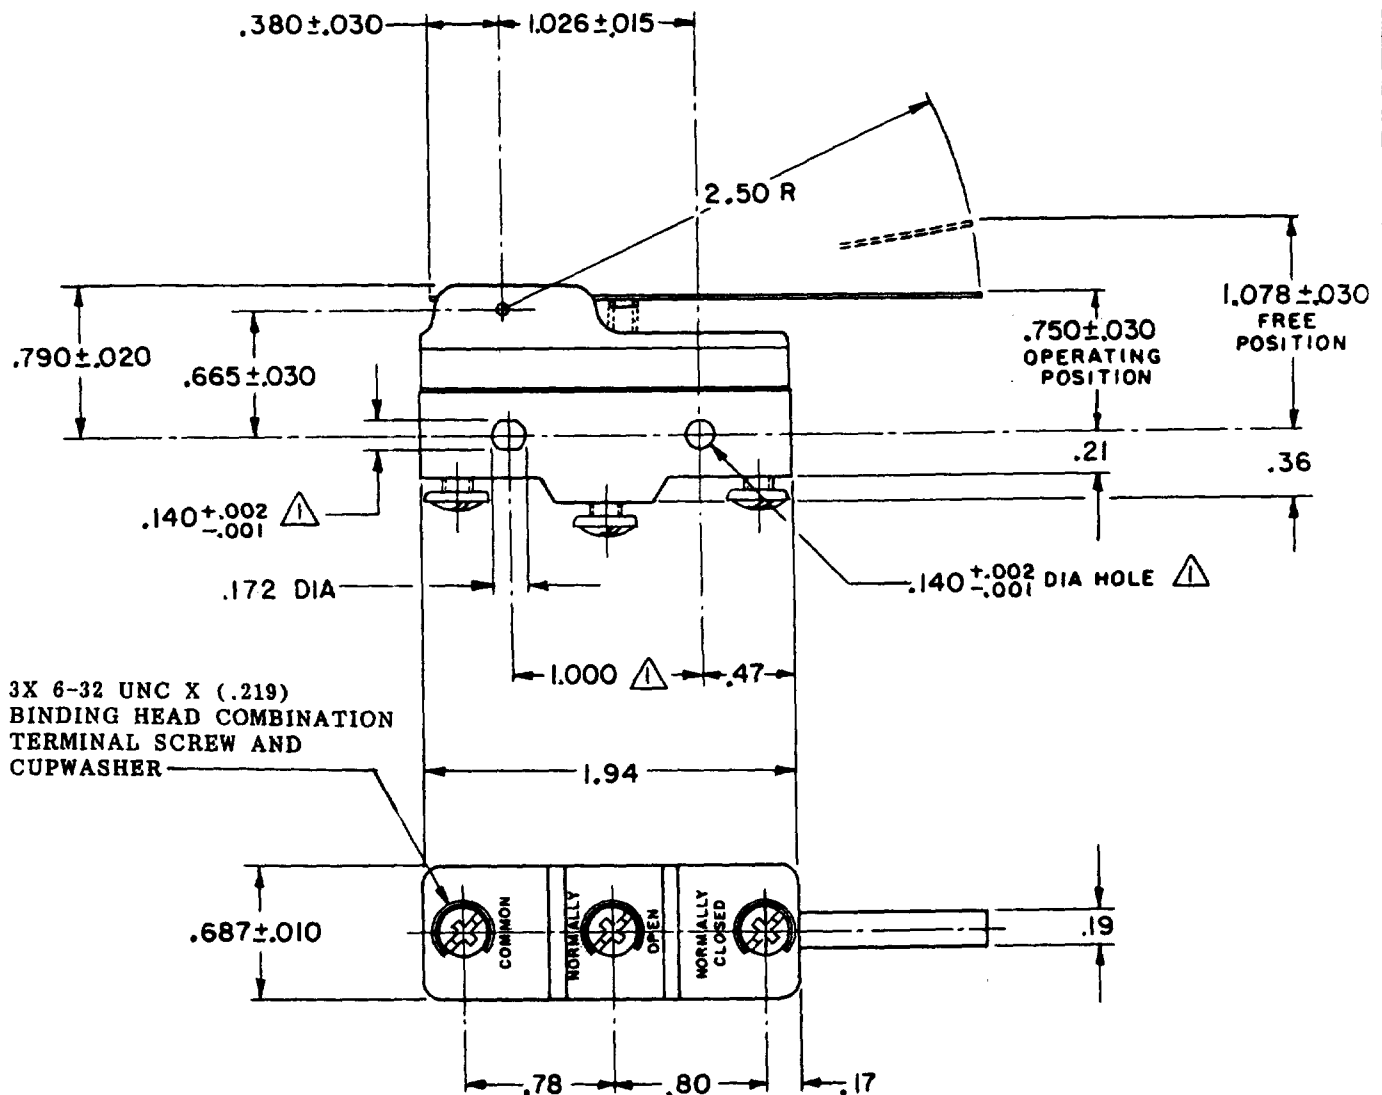

NOTES

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 2 1/2 OZ MAX
RELEASE FORCE ----- 1/2 OZ MIN
DIFFERENTIAL TRAVEL ----- .007-.050
OVERTRAVEL ----- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

CODE L22 1A-125 VAC

L288
-L315-
L307

CE SP 05 RU

1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES

WEIGHT .073 LB