

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929


SWITCH - BASIC

CATALOG LISTING

BZ-2RW8072224286-A2

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ2RW8072224286A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM.

PRODUCT CODE: AQC8505

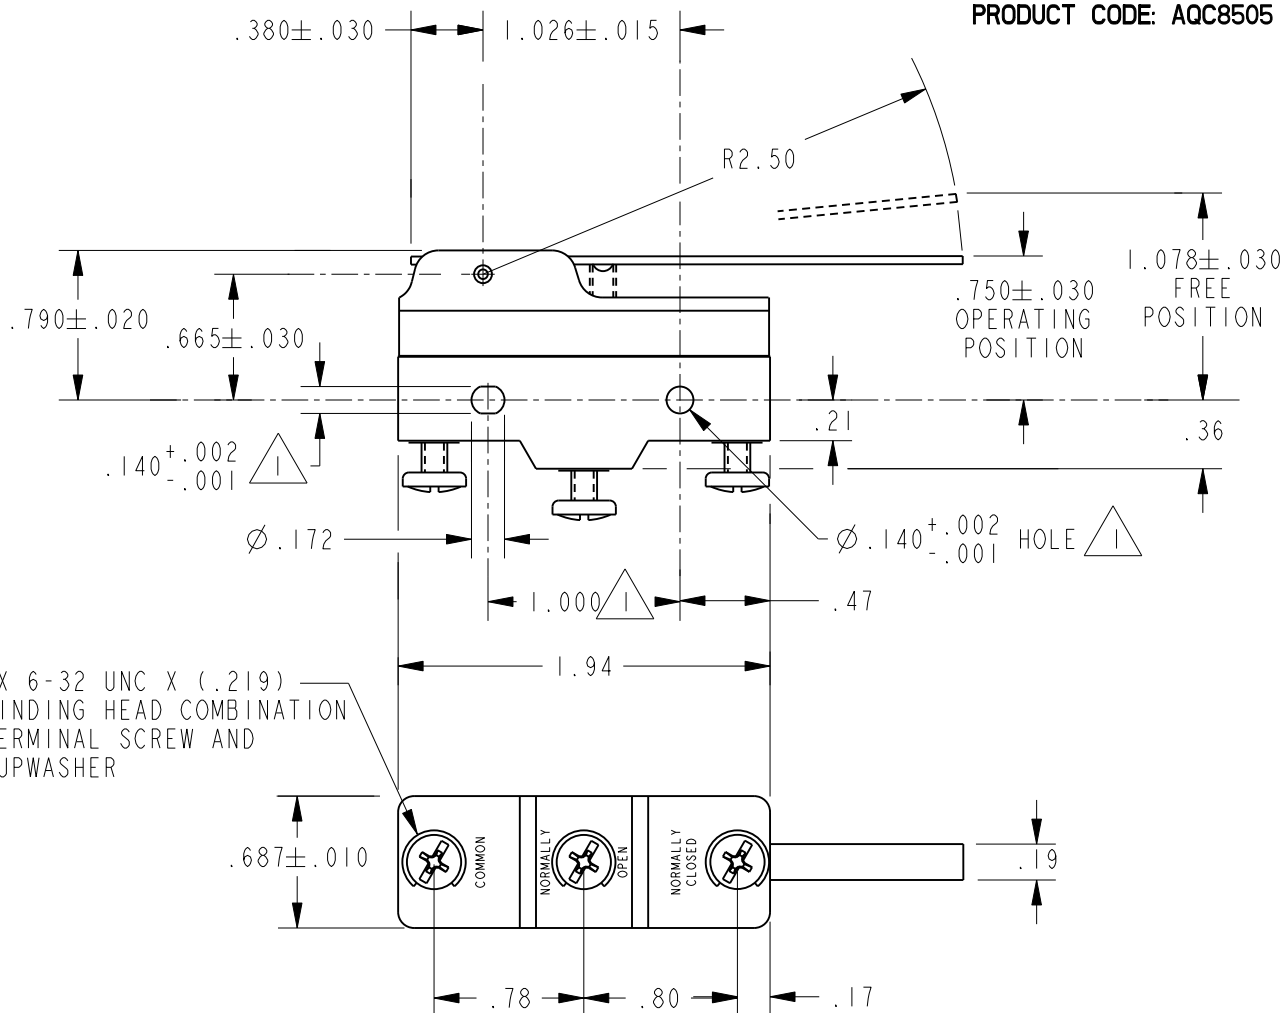


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
- 3 - CONTACT MATERIAL: GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 2 1/2 OZ MAX
RELEASE FORCE ----- 1/2 OZ MIN
DIFFERENTIAL TRAVEL ----- .007-.050
OVERTRAVEL ----- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22

1A 125 VAC



L288
L307
L315

1A 250 V $\sim$ T85 25E3

SCALE NONE

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$
WEIGHT .073 LB

CATALOG LISTING
BZ-2RW8072224286-A2

PAGE 1 OF 1

ISSUE
C

RS

CHECK

REVISIONS

A	0016786
SPK	23NOV05
B	0046794
MBH	09DEC08

RJ

CHECK

3 SEP 03

3 SEP 03

SAV

CHECK

3 SEP 03

CSL

DRAWN

PTC/CAD 2D

REPLACES XII 5057-BZ

RELEASE NO. 0001362

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08

09DEC08