

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929


SWITCH-BASIC

CATALOG LISTING

BZ-2RW80722555105-A2

PRODUCT CODE: AQC9700

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ2RW80722555105A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM

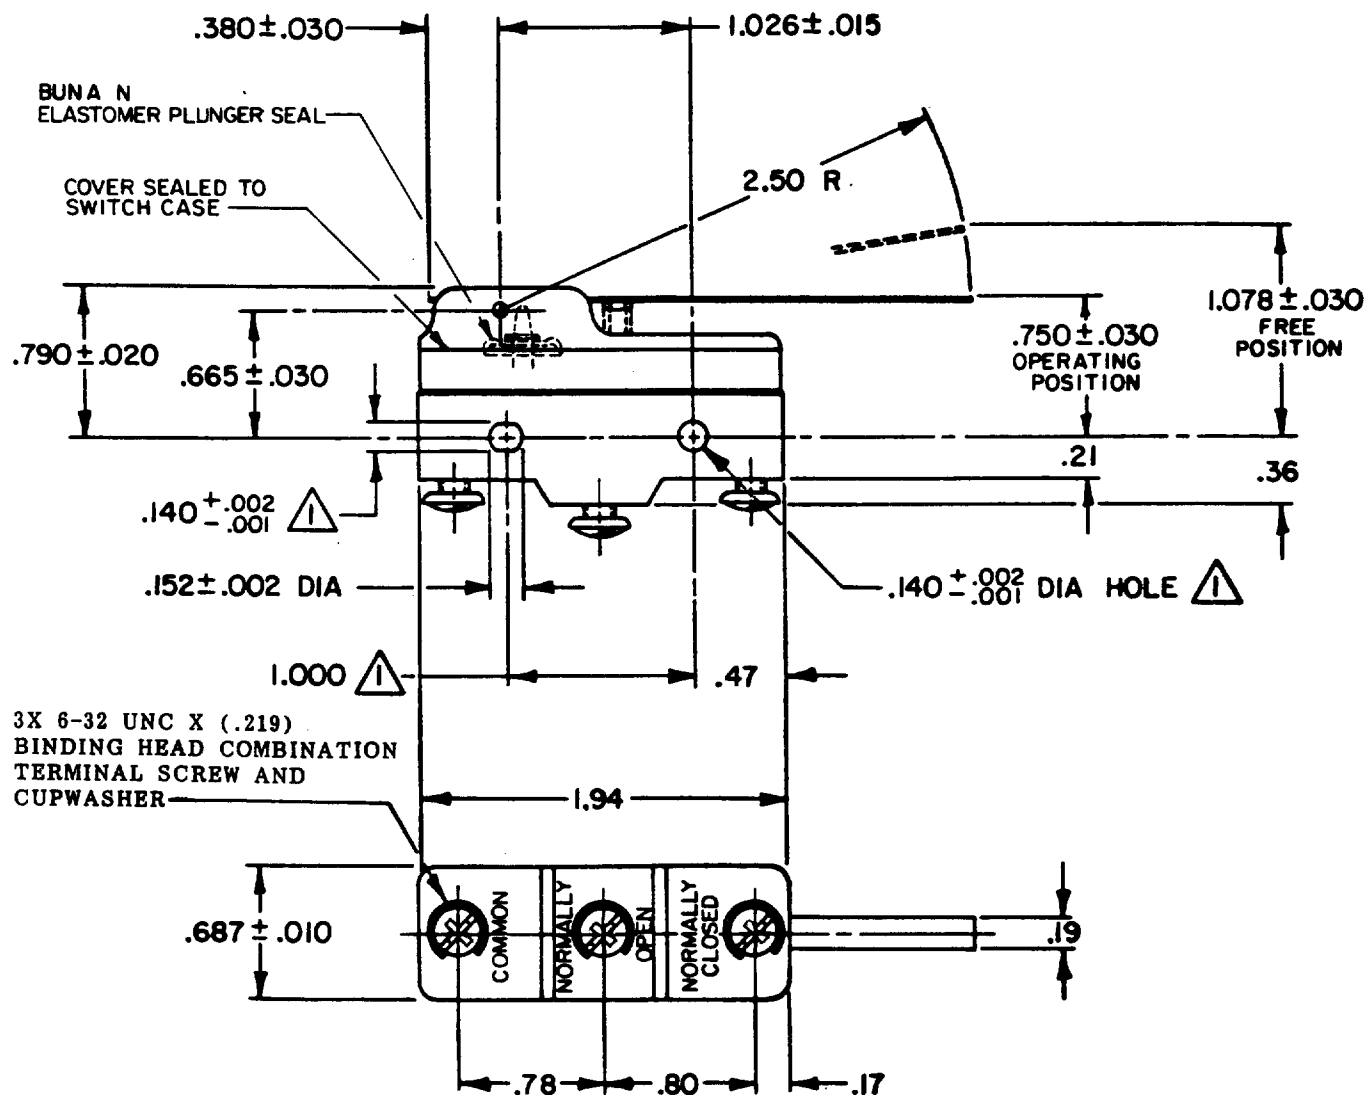


NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — 2 1/2 OZ MAX

RELEASE FORCE — 1/2 OZ MIN

DIFFERENTIAL TRAVEL — .007 - .050

OVERTRAVEL — .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22

1A 125 VAC

L288
L307
L315



1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

	DES.	TOL.	DES.	TOL.
	mm	mil/in	in	mm
NO PLACES	2	1/64	2	0.015
ONE PLACE	2, X	0.01/0.015	2, X	0.007/0.015
TWO PLACES	X, XX	0.01/0.005	X, XX	0.007/0.005
THREE PLACES				

DESIGN UNITS ☐ SI METRIC

US CUSTOMARY ☒

WEIGHT

BZ-2RW80722555105-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE
6

RELEASE NO. PR-10187

RS

11 DEC 08

CHECK

REVISIONS

A	C067209	JAP	3 MAY 90
B	C067209	JAP	22 NOV 93
C	C093346	DLT	19 AUG 98
D	0016786	SPK	23 NOV 05
E	0046794	KNR	11 DEC 08

RJ

CHECK

18 MAY 81

CEB

81 MAY 81

CEB

81 MAY 81

CEB

81 MAY 81

CEB

81 MAY 81

CEB

81 MAY 81

CEB

81 MAY 81

CEB

RASTER

FO-52848-A