

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91920

SWITCH-BASIC

CATALOG LISTING

BZ-2RW8155551-A2

BZ-2RW8155551-A2

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-3784

M

DRAWING
NUMBER

5

ISSUE

CHECK

REVISIONS

A	CO67209
3	JAP MAY 90
B	CO- 73287-J
22	JAL NOV 93
C	CO- 77589
29	MAM MAR 94
D	CO93346
DLT	14 AUG 98

CHECK

9 JAN '74

9 JAN '74


9 JAN '74

9 JAN '74

9 JAN '74

9 JAN '74

9 JAN '74

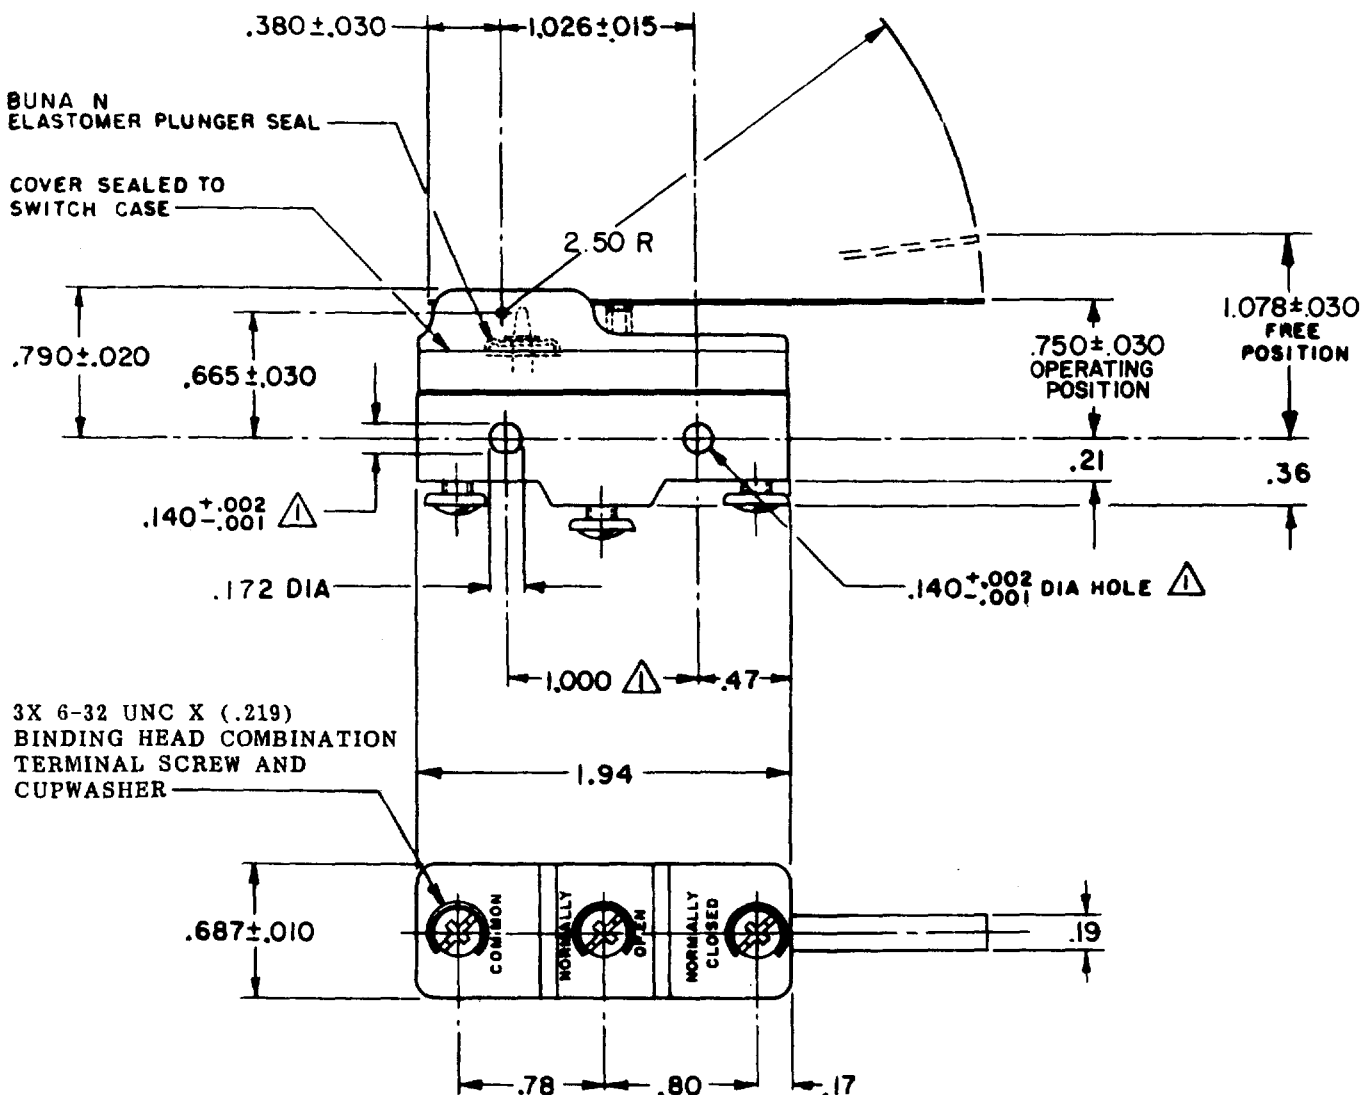

NOTE-

- △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE --- 2 1/2 OZ MAX
RELEASE FORCE --- 1/2 OZ MIN
DIFFERENTIAL TRAVEL --- .007-.050
OVERTRAVEL --- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

10A 125, 250 OR 480 VAC
1/2 A 125 VDC, 1/4 A 250 VDC

UL ® CE

L9

L288

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT .073 LB

FORMTEK

FO-52848

DRAWN

GLH

12 JAN 74