

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW822-D612

APF2560

M BZ-2RW822-D612

PAGE 1 OF 1

DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO. PR-2391

18 FEB 06

RJ

CHECK

72

21 JAN 72

CO

52446

WJM

31 JAN 83

CO

70184-M

GRT

2 JUN 92

CO

75204B

DAW

1 FEB 94

CO

77589

TSM

29 MAR 94

CO

093346

DLT

2 SEP 98

CO

0018449

TGP

18 FEB 06

72

21 JAN 72


72

21 JAN 72

72

21 JAN 72

72

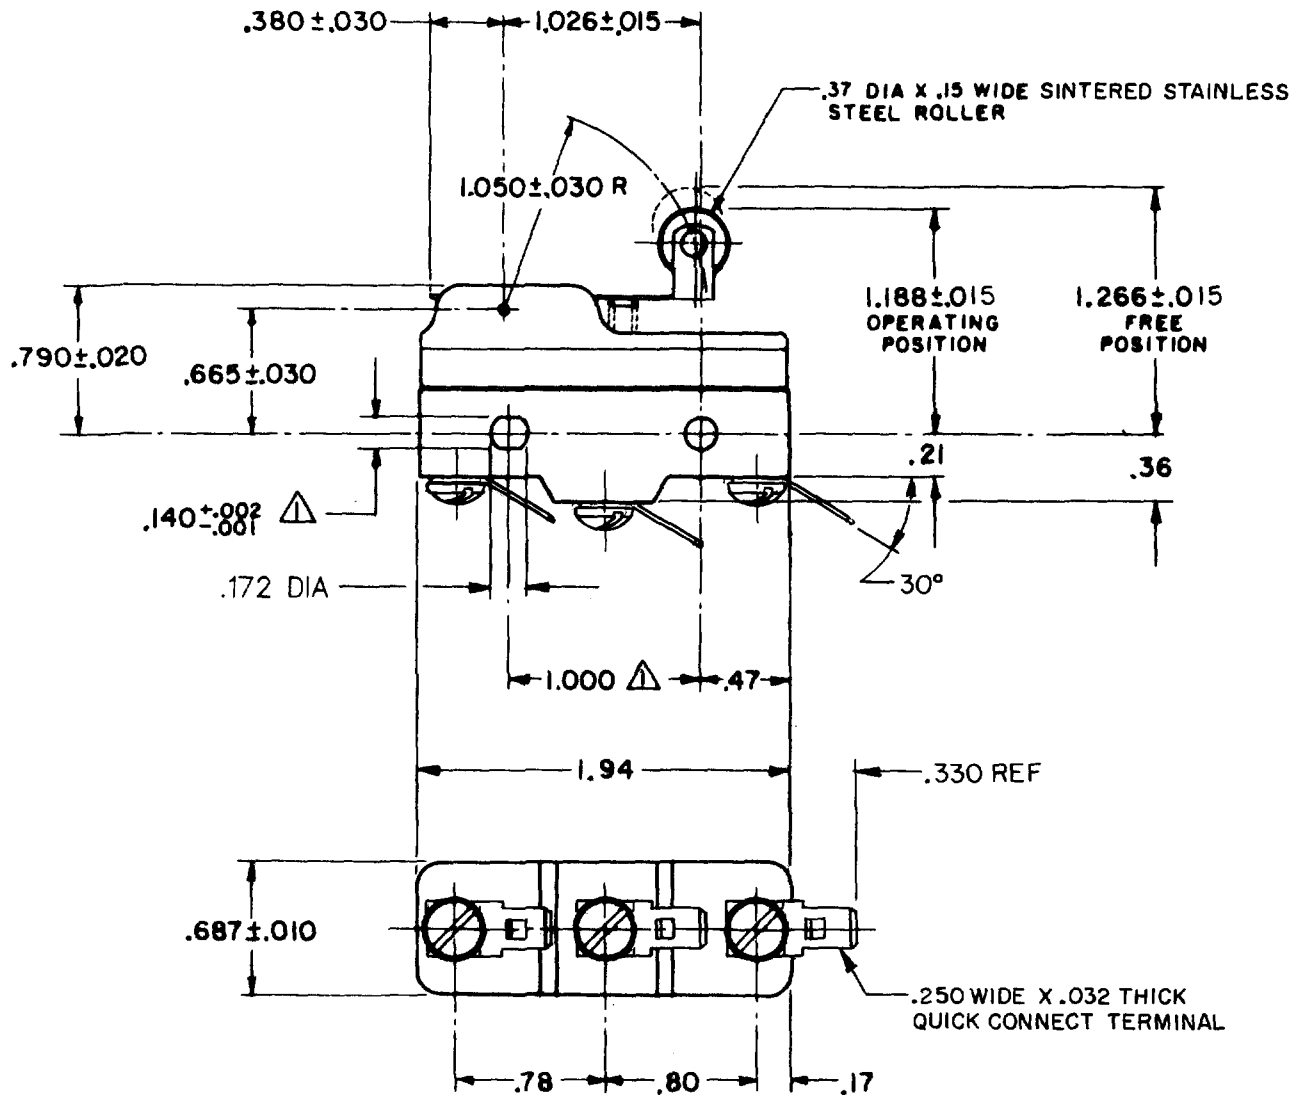

NOTE

Δ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 6 OZ MAX

RELEASE FORCE — — — — 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL — — .003 — .020

OVERTRAVEL — — — — .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

- L74 - 15A-125, 250, OR 480 VAC; 2A-600 VAC
1/8HP-125 VAC; 1/4HP-250 VAC
1/2A-125 VDC; 1/4A-250 VDC

-L288-

-L306-

-L315-

CE

05

FI

UL

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ± 5°

WEIGHT .076 LB

FORMTEK

FO-50378-1A

DRAWN

RE R 19 JAN 72

72

21 JAN 72

72

21 JAN 72

72