


MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
Minneapolis, Minnesota

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RW82224-A2

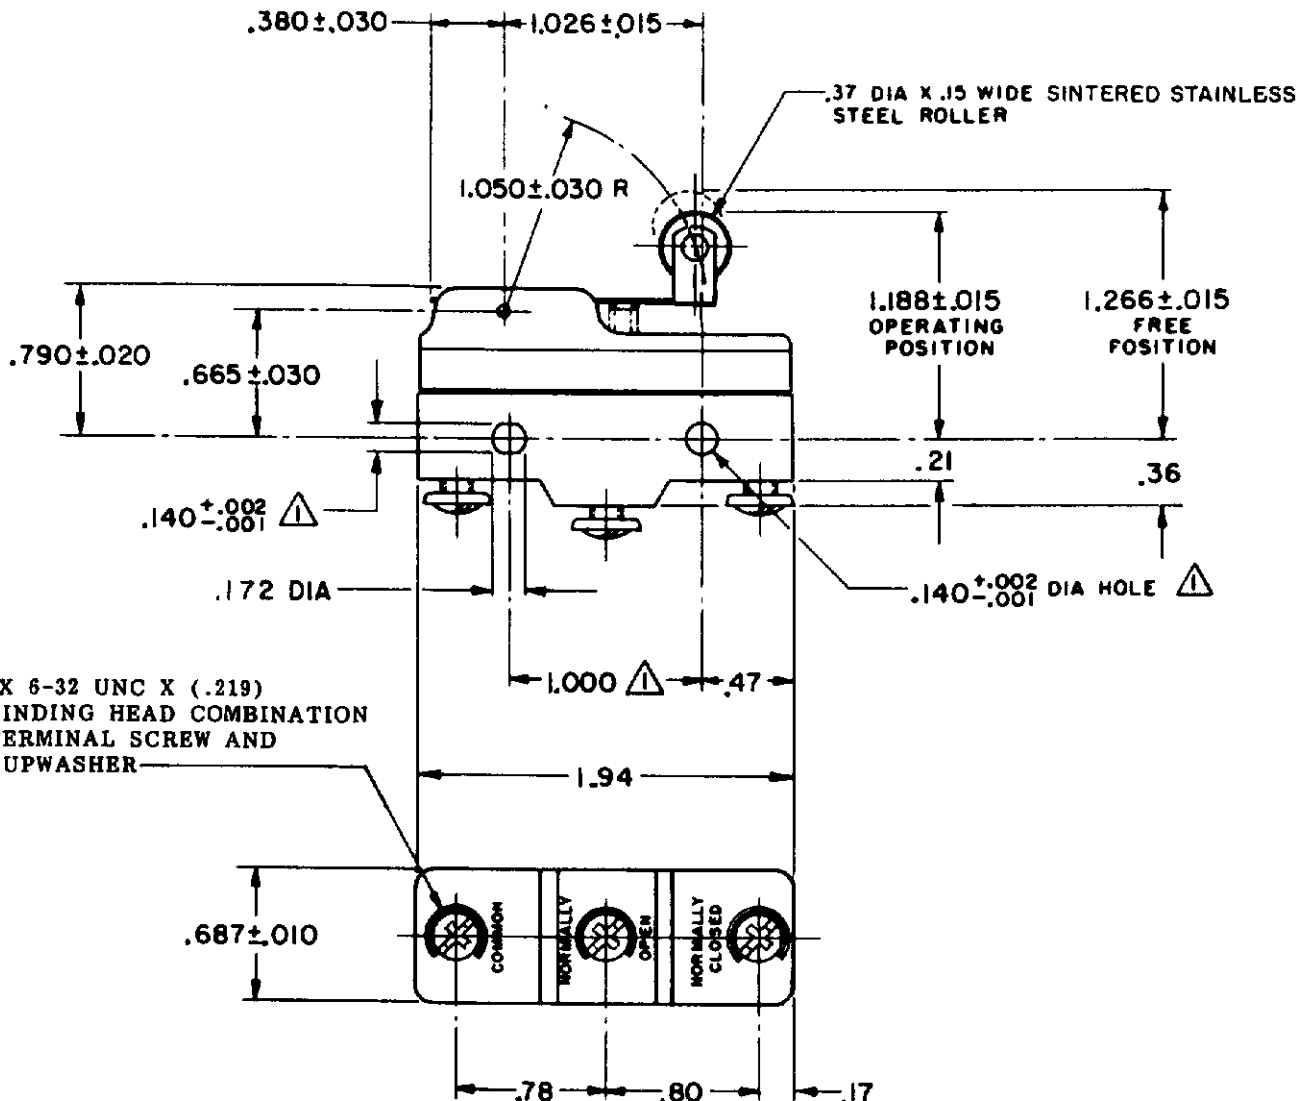

NOTES

- △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.139$ MAX DIA ON $1.000 \pm .002$ CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS

OPERATING FORCE----- 6 OZ MAX
RELEASE FORCE----- 1 1/2 OZ MIN
DIFFERENTIAL TRAVEL----- .003-.020
OVERTRAVEL----- .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UNDERWRITERS' LAB. INC LISTED RATING
- L96- 15A-125, 250, OR 480 VAC
1/2 A-125 VDC, 1/4 A-250 VDC
1/8 HP-125 VAC, 1/4 HP-250 VAC

-L288-
-L299-
-L306-

CE D SP
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.1)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT .076 LB

BZ-2RW82224-A2

PAGE 1 OF 1

DRAWING NUMBER

10

ISSUE

REVISIONS

A	CO-16736	BCH	5 APRIL 62
B	CO17410	LEB	18 MAR 63
C	CO-7018 4-G	JW	22 MAR 62
D	CO-73287-J	JAL	22 NOV 93
E	CO-75204B	DAW	1 FEB 94
F	CO-77588	MAM	29 MAR 94
G	CO93346	DLT	17 SEP 98

FORMTEK

FO-50375

DRAWN

GCH 5 APRIL 62 CHECK DAW 17 APR 62

REPLACES

RELEASE NO.

CHECK

CHECK