MICRO SWITCH
FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RW8223312
AQB0062

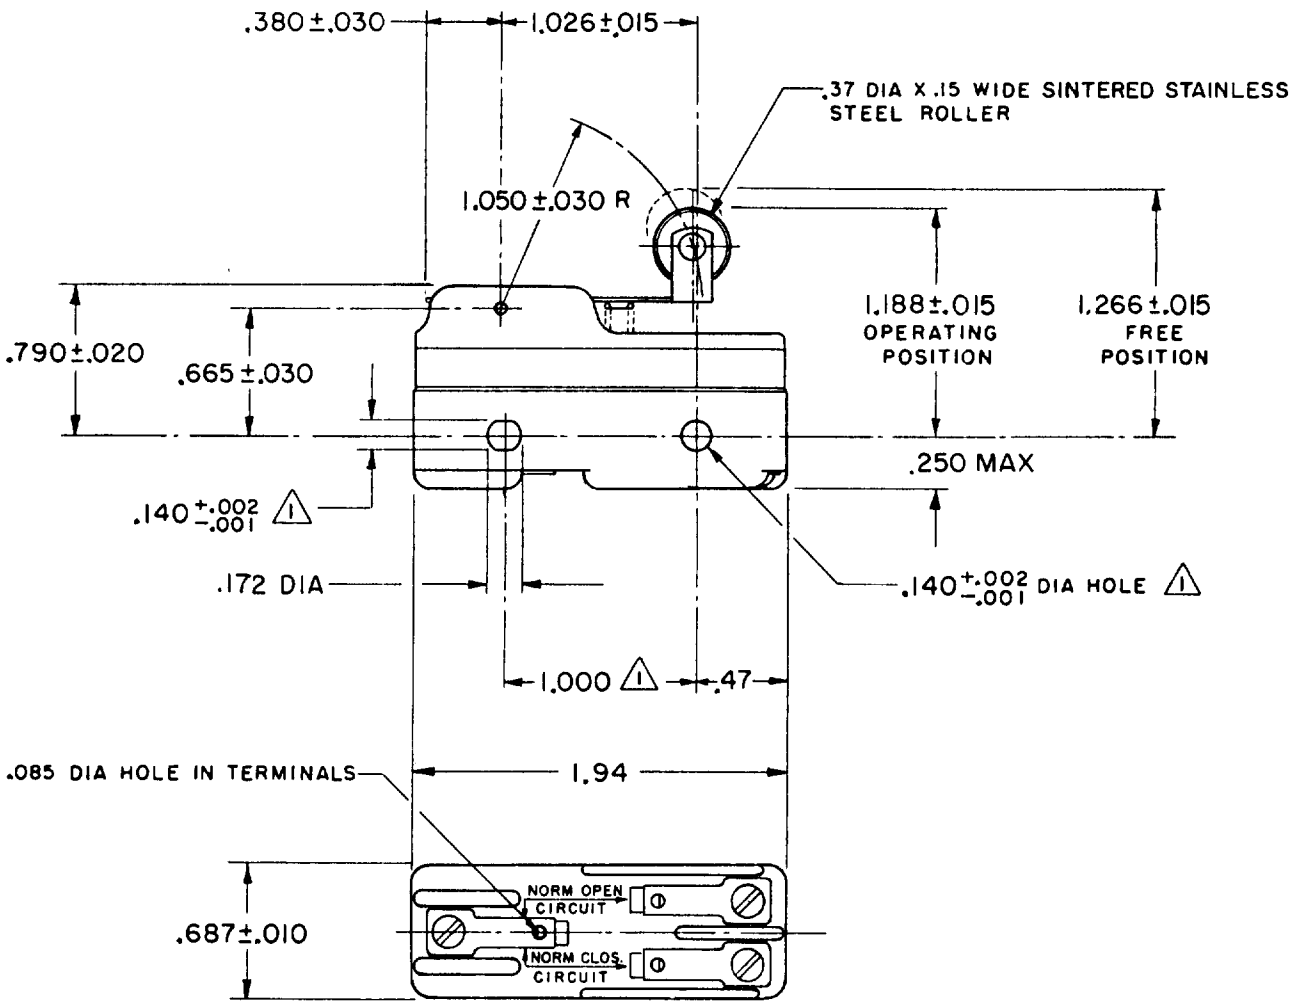

NOTES

1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ---- 6 OZ MAX

RELEASE FORCE ---- 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL --- .003 - .020

OVERTRAVEL ------- .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A-125, 250 OR 480 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

L288
L306
L315

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

DESIGN UNITS

WEIGHT .063 LB

BZ-2RW8223312
PAGE 1 OF 1
RELEASE NO. PR-8591
REPLACES
DRAWING NUMBER
ISSUE 9

REVISIONS

A	00 47585	KAK 12 MAY 80	09JAN06
B	CO 58037	SMA 1 OCT 85	
C	CO 70184-H	GRT 2 JUN 92	RJ
D	CO-75204B	DAW 1 FEB 94	
E	CO-77591	DAW 22 JUN 94	27 MAR 80
F	C093346	DLT 17 SEP 98	
G	CO-94212-C	DLT 17 SEP 99	
H	0017580	TSG 09JAN06	CEB

CHECK

DRAWN KAK 26MAR80

FORMTEK
FO-52848-A