

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

PROBING, BARRING

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW82262T

BZ-2RW82262T

PAGE 1 OF 1

M
DRAWING
NUMBER

7

ISSUE

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO	16736
	GCH	28 MAY 62
B	CO	34306
	DAW	18 SEP 75
C	CO	69351-D
	JWB	18 JUL 91
D	CO	77589
	TSM	29 MAR 94
E	CO	93346
	DLT	17 SEP 98

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

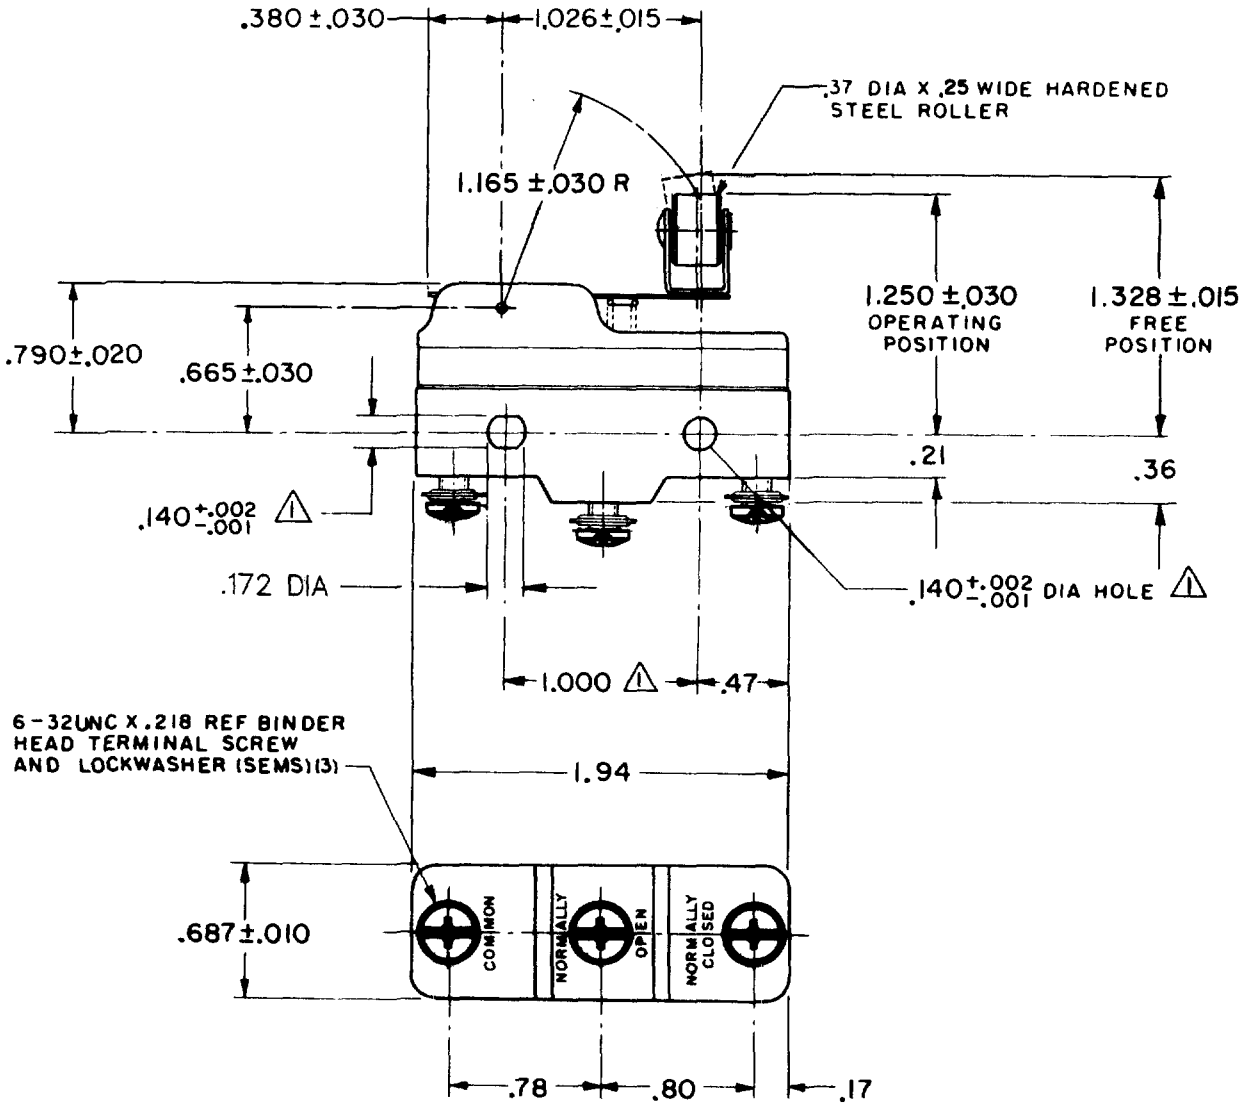

NOTE

△ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 6 OZ MAX	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 1 1/2 OZ MIN	UNDERWRITERS' LAB. INC. LISTED RATINGS -L96- 15A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC 1/8 HP-125 VAC; 1/4 HP-250 VAC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
DIFFERENTIAL TRAVEL ---- .003-.020	-L288- -L299- -L306- CE D SP 16A 250V ~ T85 5E4	WEIGHT .076 LB
DO NOT OVERTRAVEL MORE THAN ---- .141		

FORMTEK

FO-50378

DRAWN

GCH

28 MAY 62

CHECK