

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW82272-A2

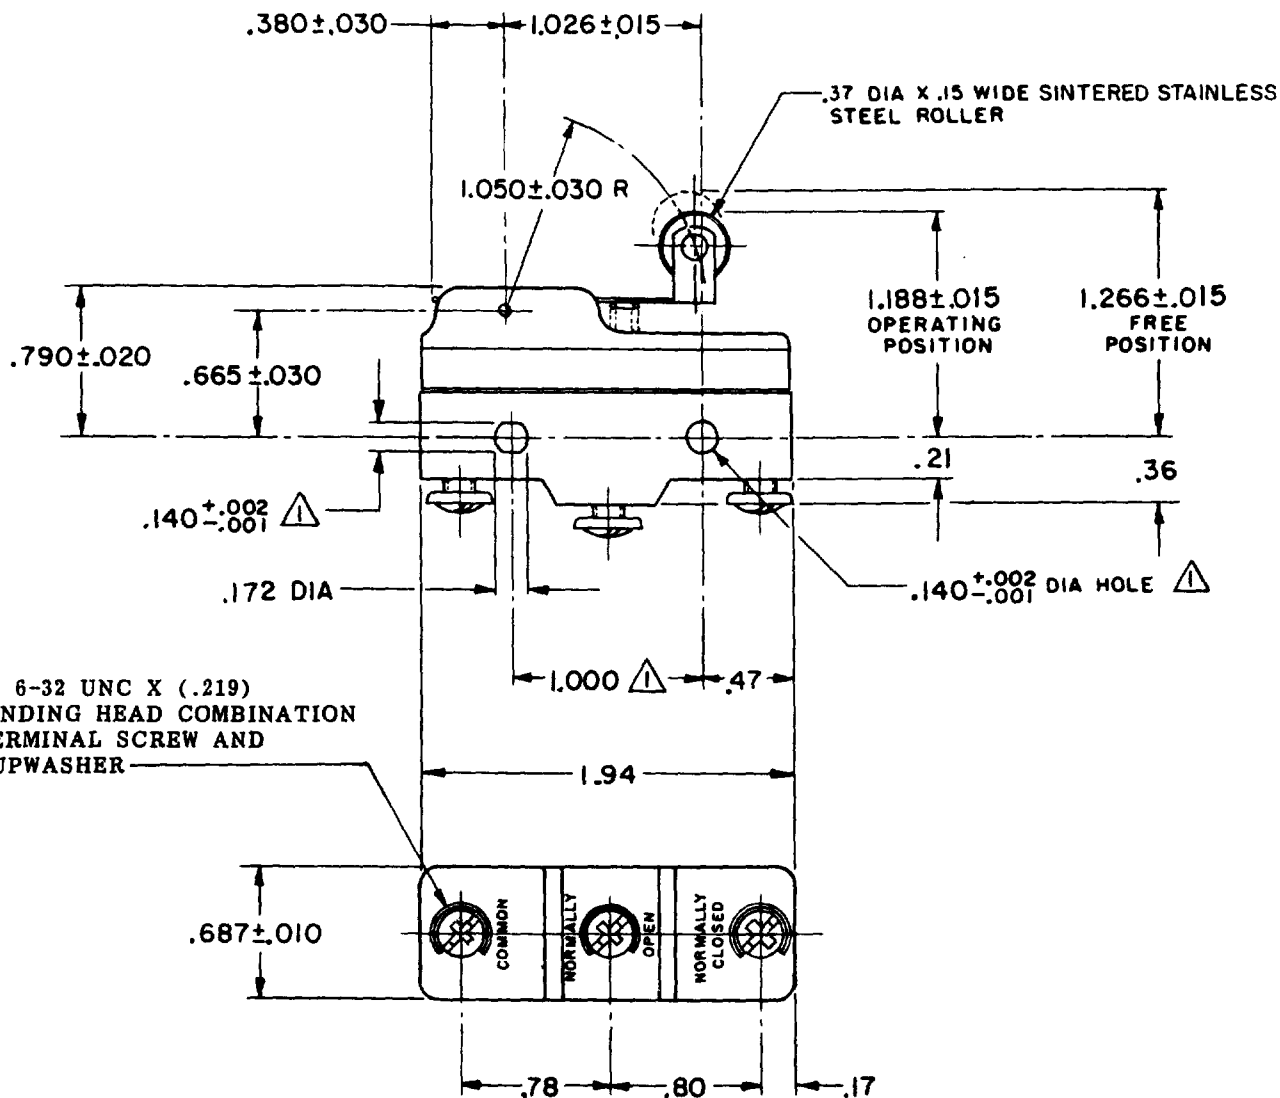

NOTES

- △ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS
- 2 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 6 OZ MAX
RELEASE FORCE ----- 1 1/2 OZ MIN
DIFFERENTIAL TRAVEL ----- .003 - .020
OVERTRAVEL ----- .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED - FILE E12252
CODE L22 1A-125 VAC

L288
L299
L307



1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.01) $\pm .030$
TWO PLACE (.001) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES

WEIGHT .076 LB

MBZ-2RW82272-A2

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-1144

DRAWING NUMBER

8

ISSUE

REVISIONS

A	CO31576	JAM	23 JAN 73
B	CO33285	RER	20 MAR 74
C	CO-70184-M	CO	2 JUN 92
D	CO-73287-J	JAL	22 NOV 93
E	CO-75204B	DAW	1 FEB 94
F	CO-77589	MAM	29 MAR 94
G	CO93346	DLT	19 AUG 98

FORMTEK

FO-50378-1A

DRAWN

GCH 10 FEB 70