

REVISIONS

A	C096055	G J W	18 MAR 00
B	0011610	N M	05 MAR 05

AK

CHECK

5 FEB 99

J A F

CHECK

5 FEB 99

J J A

DRAWN

FORMTEK

X111577-BZ

REPLACES

PR-23831

RELEASE NO.

CHECK

AK

CHECK

5 FEB 99

J A F

CHECK

5 FEB 99


J J A

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

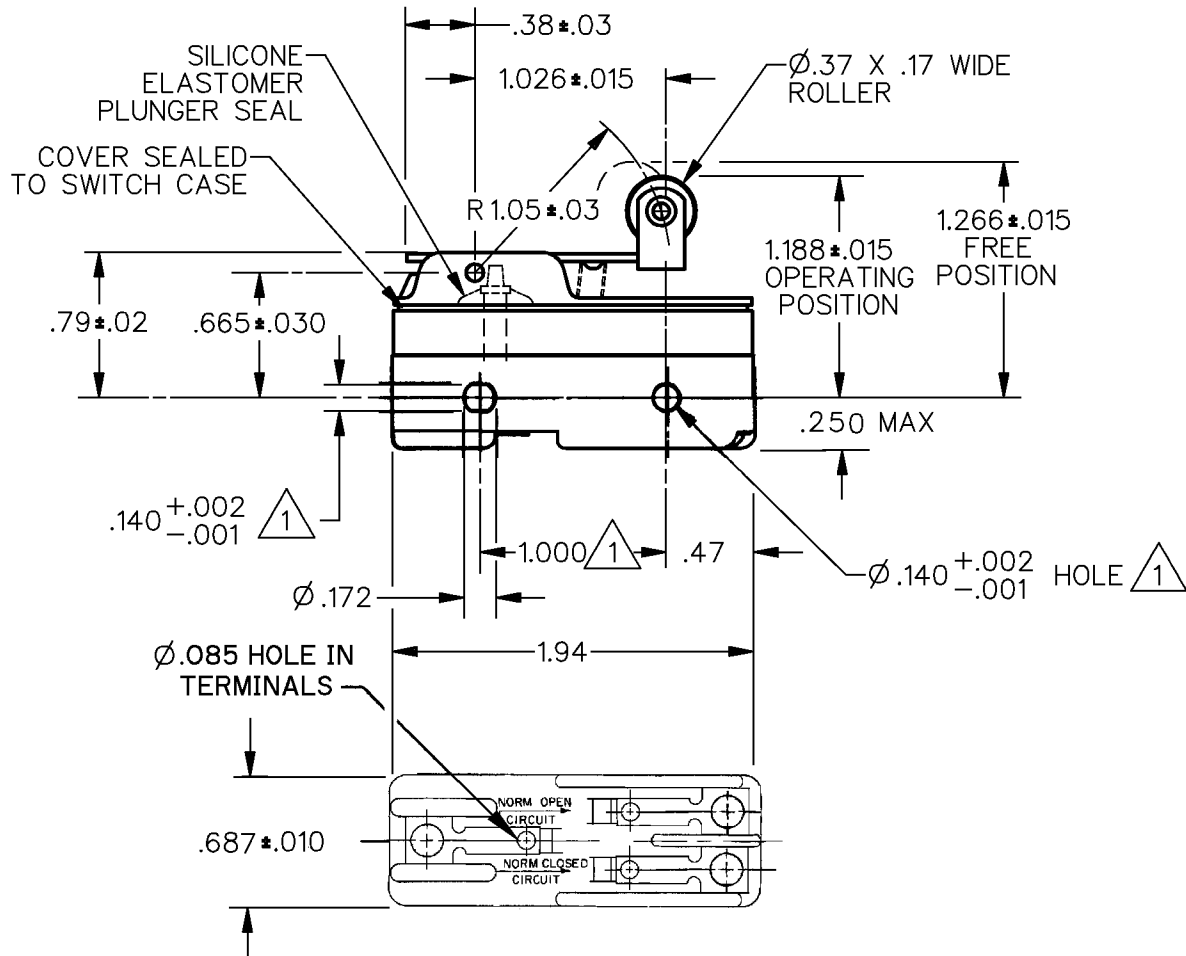BZ-2RW822725551


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing .139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 - CONTACT MATERIAL: GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE -----6 OZ MAX
RELEASE FORCE -----1 1/2 OZ MIN
DIFFERENTIAL TRAVEL -----.003-.020
OVERTRAVEL -----.094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22
1A 125 VAC

L288
L299
L307

CE
1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES $\pm$

WEIGHT .060 LB