


2	REPLACES
---	----------

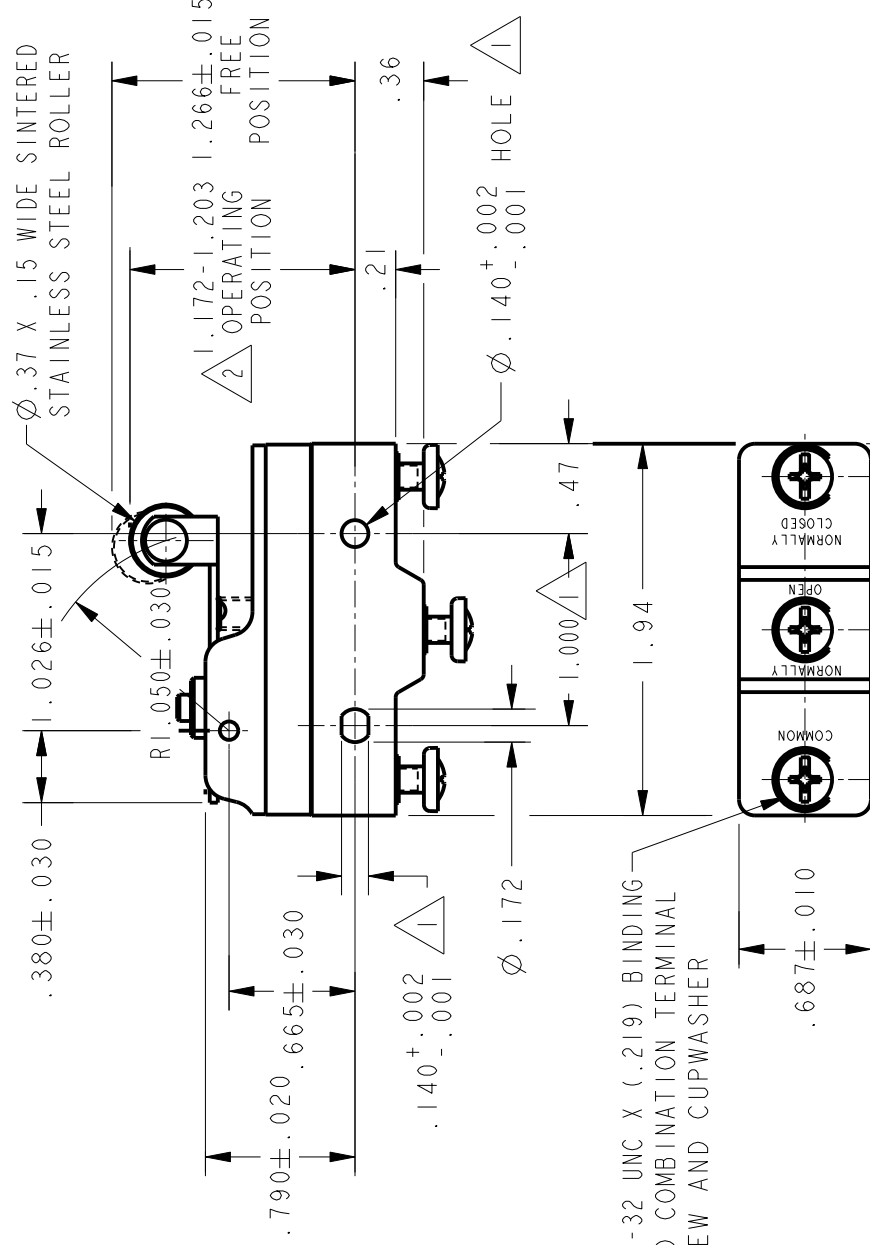

THE MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø. 139 MAX ON

1.000 ± .002 CENTERS
ADJUSTING SCREW PERMITS ADJUSTMENT OF OPERATING POSITION THROUGH
RANGE INDICATED

DO NOT OVERTRAVEL MORE THAN .145 FROM ANY OPERATING POSITION TO PROVIDE OPTIMUM MECHANICAL LIFE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH HONEYWELL.

CHARACTERISTICS		ELECTRICAL DATA		SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE	----- 12 OZ MAX	CONTACT ARRANGEMENT		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE	----- .4 OZ MIN	S P D T		ONE PLACE (.0)		
DIFFERENTIAL TRAVEL	----- .003-.020	L96		TWO PLACE (.00)		
OVERTRAVEL	----- 3----- .040 MIN FROM 1.172 OPERATING POSITION	15A 125, 250 OR 480 VAC 1/8HP 125 VAC, 1/4HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC		THREE PLACE (.000)		
		L288 L315 L306		ANGLES		
		CE   		WEIGHT		
		16A 250V ~ T85 5E4				