

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW82443-A2

MBZ-2RW82443-A2

PAGE 1 OF 1

RELEASE NO. PR-13869-T REPLACES X81386-BZ

DRAWING
NUMBER

3

ISSUE

REVISIONS

A	CO-73287-J
	JAL
	22 NOV 93
B	C093346
	DLT
	28 AUG 98

CHECK

CHECK

26 APR 85

KAG


85

APRIL

JAS

FORMTEK

FO-52848-A

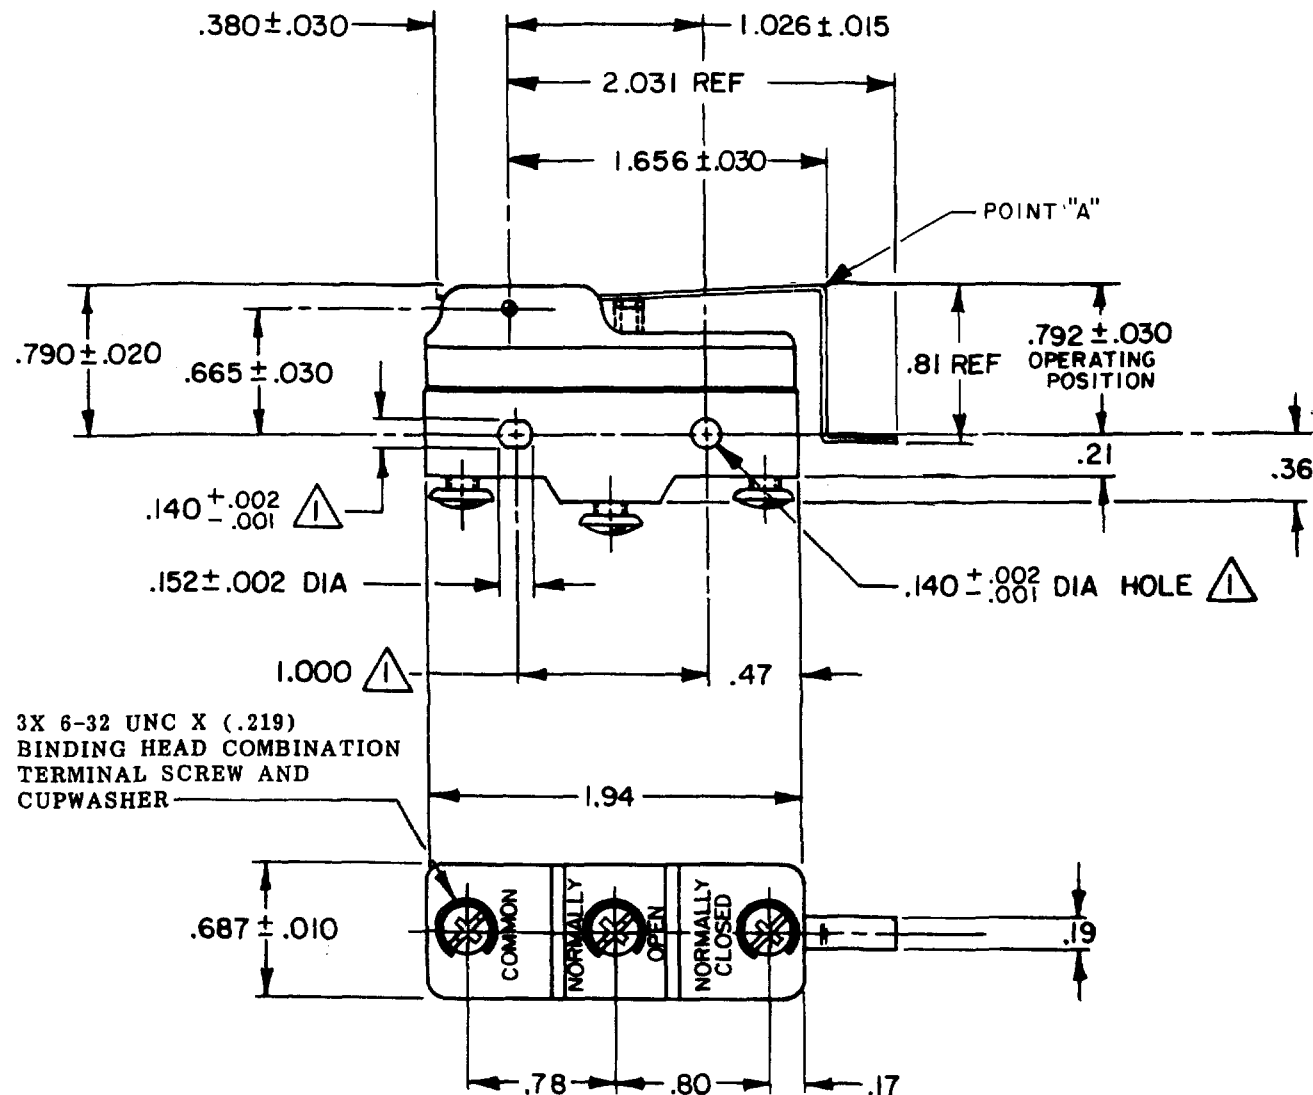


NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 .002 CENTERS
- 2 - SWITCH WILL WITHSTAND TEMPERATURE OF 400°F FOR 100 HOURS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS POINT "A"

OPERATING FORCE-----4 1/2 OZ MAX
RELEASE FORCE-----3/4 OZ MIN
DIFFERENTIAL TRAVEL---.004 - .035
OVERTRAVEL-----.141 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L35

5A 125, 250, OR 480 VAC
1/2 A 125 VDC, 1/4 A 250 VDC

L288



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DES.	TOL.	DES.	TOL.
	in	mm/16	in	mm/16
NO PLACES	X	1/64	X	0.0156
ONE PLACE	X, X	0.4/64	X, X	0.007812
TWO PLACES	X, X	0.16/64	X, X	0.003906
THREE PLACES	X, X	0.01/64	X, X	0.001953
ANGLES				

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

WEIGHT .073 LB