


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW8253312

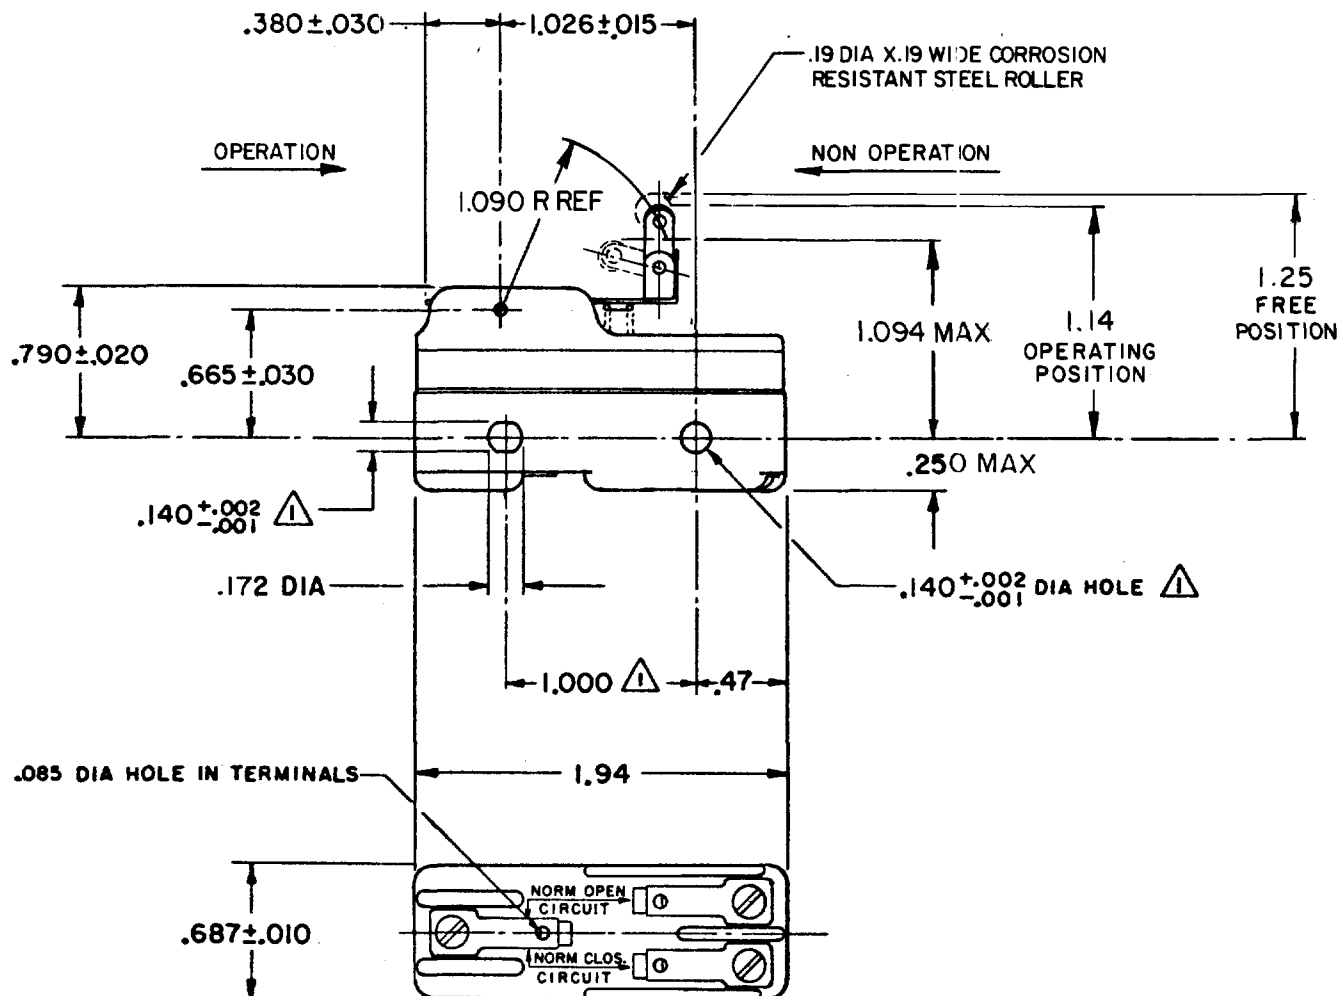


NOTES

- ⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.139$ MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 5 OZ MAX

RELEASE FORCE ----- 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL ---- .003 - .020

OVERTRAVEL ----- .094 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

UL LISTED-FILE E12252
CODE L96 15A-125, 250 OR 480 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

L288
L299
L306

CE Ⓢ Ⓢ
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/64	X	0.001
ONE PLACE	X,X	0.001	X,X	0.001
TWO PLACES	X,XX	0.0001	X,XX	0.0001
THREE PLACES	X,XXX	0.00001	X,XXX	0.00001
ANGLES				

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT

BZ-2RW8253312
PAGE 1 OF 1

M

DRAWING
NUMBER

5

ISSUE

CHECK

REVISIONS

A	CO-58037	SMA	1 OCT 85
B	CO-77591	DAW	22 JUN 94
C	CO-093346	DLT	18 SEP 98
D	CO-94212-C	DLT	17 SEP 99

REPLACES

RELEASE NO. PR-9765

CHECK

CHECK

28 JAN 81

28 JAN 81

28 JAN 81

FORMTEK

FO-52848-A

DRAWN

28 JAN 81