

REVISIONS

A	C083413
J A K	2 NOV 96
B	C084382
MAM	16 MAY 97
C	C093346
D L T	16 SEP 98

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

X100250-BZ

REPLACES PR-22115

CHECK

CHECK

25 APR 96

J A F

CHECK

24 APR 96

J A K


MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW8255111-A46

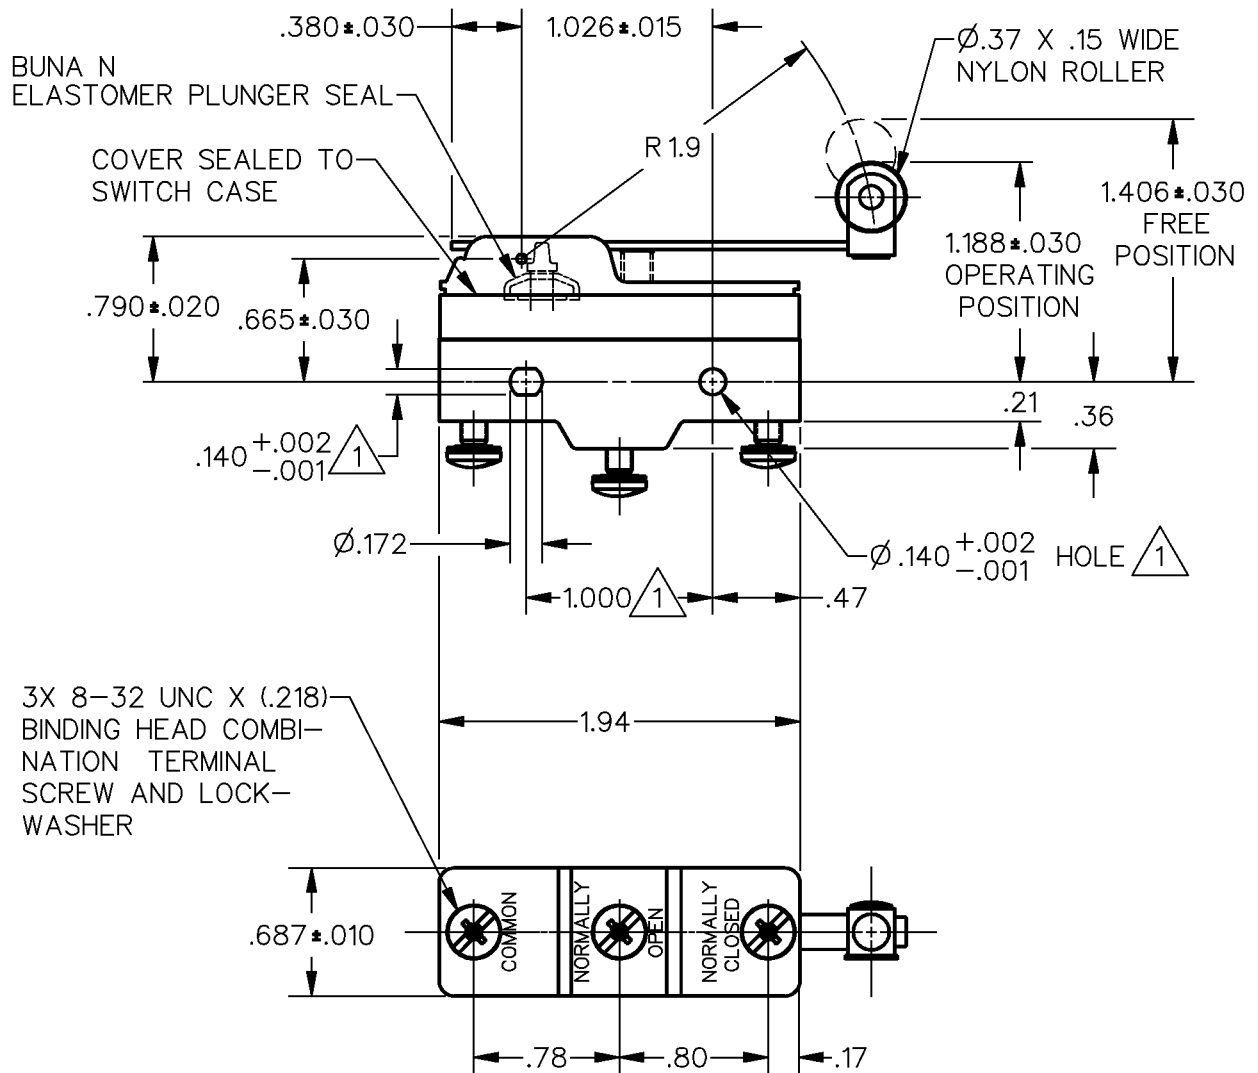


NOTES

- (1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø .139 MAX ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 7 OZ MAX
DIFFERENTIAL FORCE
RELEASE FORCE — — — 3/4 OZ MIN
PRETRAVEL
DIFFERENTIAL TRAVEL — — .004—.040
OVERTRAVEL — — — .156 MIN
FREE POSITION

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96

15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE D A 1
16A 250V ~ T85 5E4

SCALE FULL

DO NOT
SCALE PRINTUNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT .076 LB

DDM/CAD

DRAWN