

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
BZ-2RW82555T-S

APV1501

M BZ-2RW82555T-S

DRAWING
NUMBER

6

ISSUE

REPLACES

RELEASE NO. PR-6918

CHECK

08DEC05

RJ

CHECK

18

GCH

5 JAN 78

78


CHECK

4 JAN

TMM

DRAWN

FO-52848-A

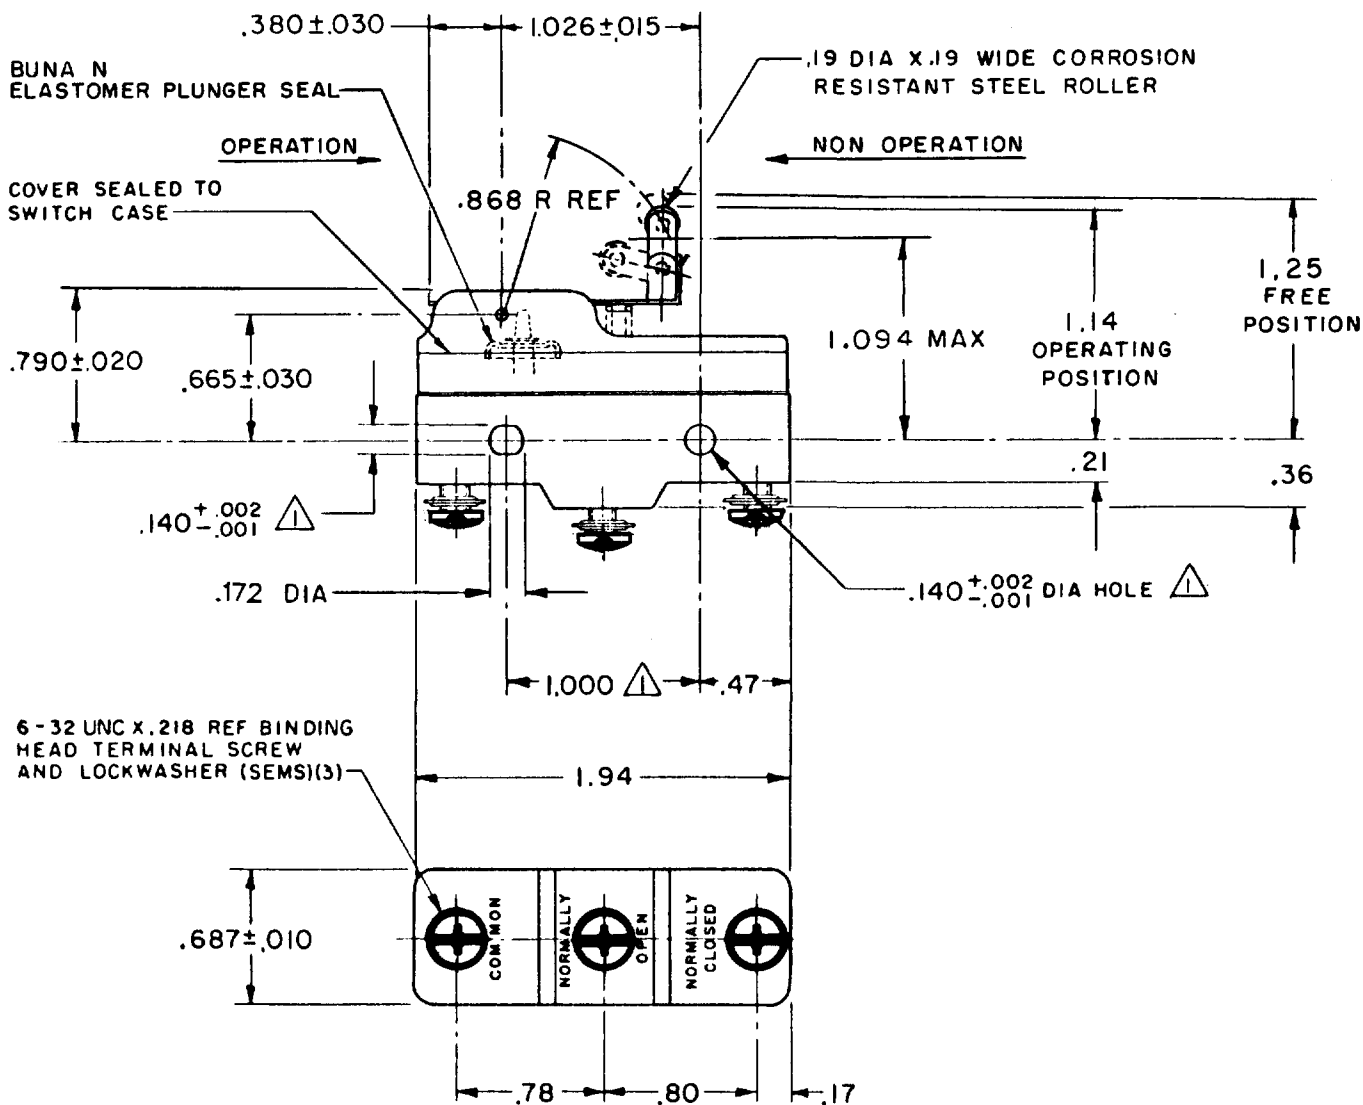


NOTE

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 8 OZ MAX
RELEASE FORCE — — — 1 1/2 OZ MIN
DIFFERENTIAL TRAVEL — — .015 MAX
DO NOT OVERTRAVEL MORE THAN — .109

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

-L96- 15 A - 125, 250, OR 480 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC
1/8 HP - 125 VAC; 1/4 HP - 250 VAC
-L288-
-L315-
-L306-
CE EN 05 SP RU

16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	
ONE PLACE	X,X	0.4/.016	X X 0.8/.03
TWO PLACES	X,XX	0.15/.006	X XX 0.38/.015
THREE PLACES	X,XXX		X XXX 0.13/.005
ANGLES			

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT