

MICRO SWITCH


FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW8255T-S

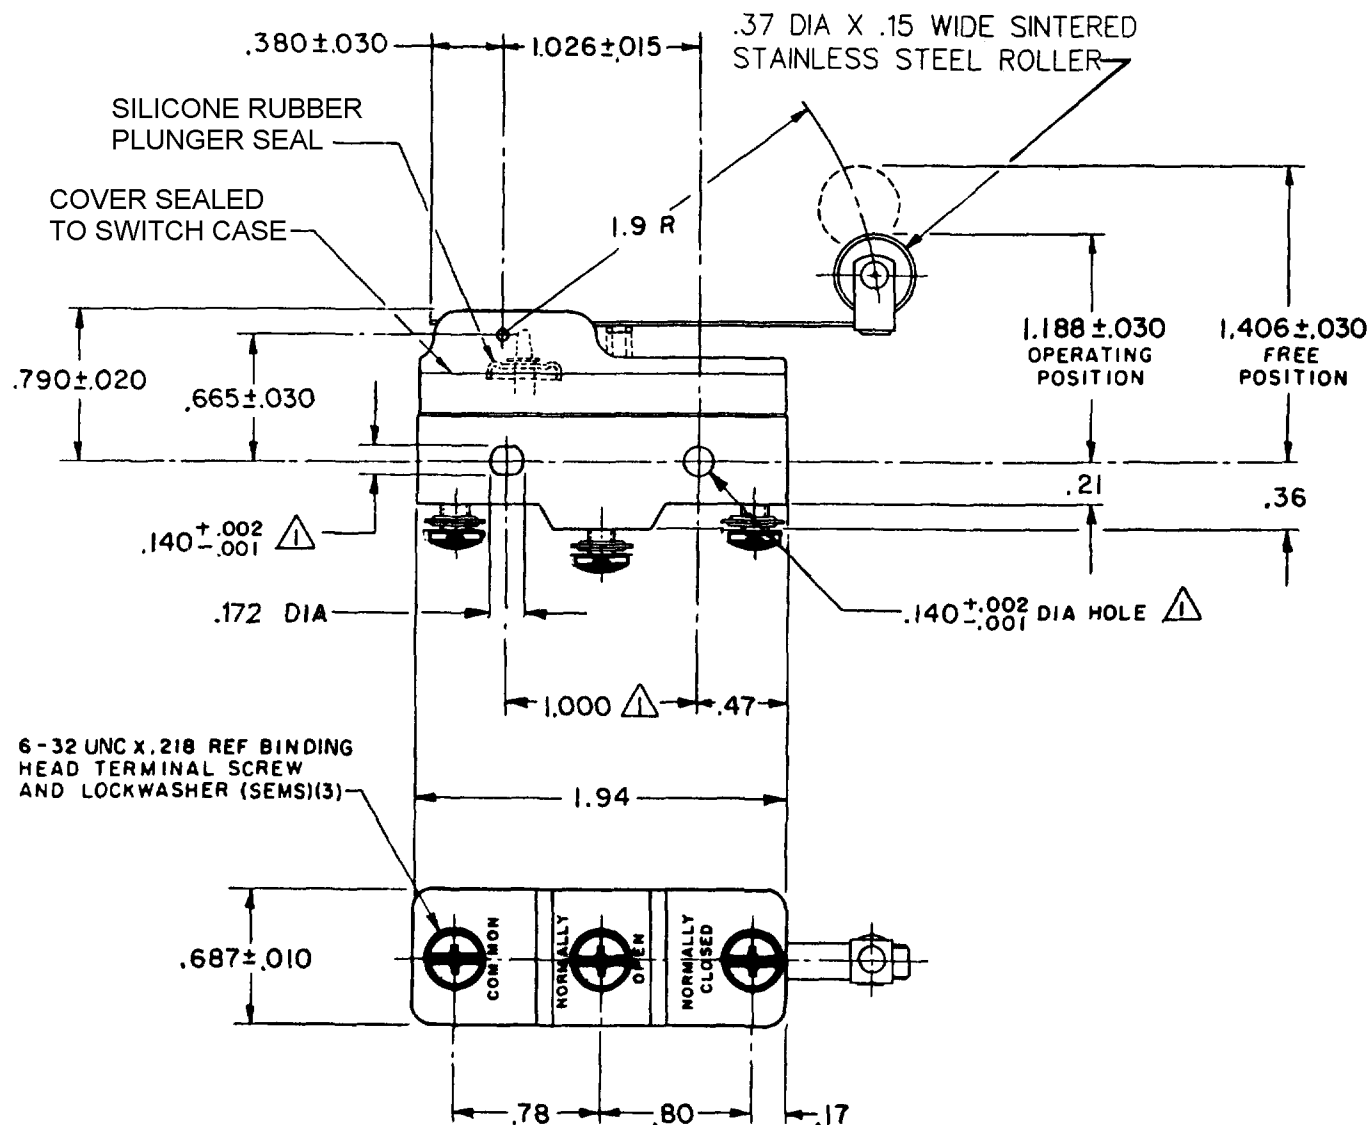


NOTES

- 1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS
- 2. SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — 3 1/2 OZ MAX

RELEASE FORCE — — 3/4 OZ MIN

DIFFERENTIAL TRAVEL — .004 — .040

OVERTRAVEL — — .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96 15A 125, 250 OR 480 VAC
1/8 HP 125 VAC, 1/4 HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306

CE D 9A 16A 250V T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 3

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/104	X X
ONE PLACE	X, X	0.4/0.016	X X X
TWO PLACES	X, X, X	0.15/0.006	X X X X
THREE PLACES	X, X, X, X	0.001/0.0001	X X X X X
ANGLES			

SI METRIC

US CUSTOMARY

DESIGN UNITS



WEIGHT .079 LB

CATALOG LISTING
BZ-2RW8255T-S
PAGE 1 OF 1

M

8

REVISIONS

A	CO-39621	T M M	16 DEC 77
B	CO-67209	J A P	3 MAY 90
C	CO-69351-D	J W B	15 JUL 91
D	CO-75204B	K D R	1 FEB 94
E	CO-77588	K D R	29 MAR 94
F	CO-93346	D L T	14 SEP 98
G	204485	C S L	4 DEC 01

FO-52848-A

DRAWN

REPLACES

RELEASE NO. PR-6725

CHECK

CHECK

17 OCT 77

CSL

CHECK

T M M 12 OCT 77