

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW82725551-A2

AQB2400

BZ-2RW82725551-A2

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-1039

25 NOV 05

CHECK

70

5 FEB 70

2 MAY 90

22 NOV 93

1 FEB 94

29 MAR 94

19 AUG 98

25 NOV 05

CHECK

17 DEC 69


GCH

FO-50378-1A

DRAWING NUMBER

78

ISSUE

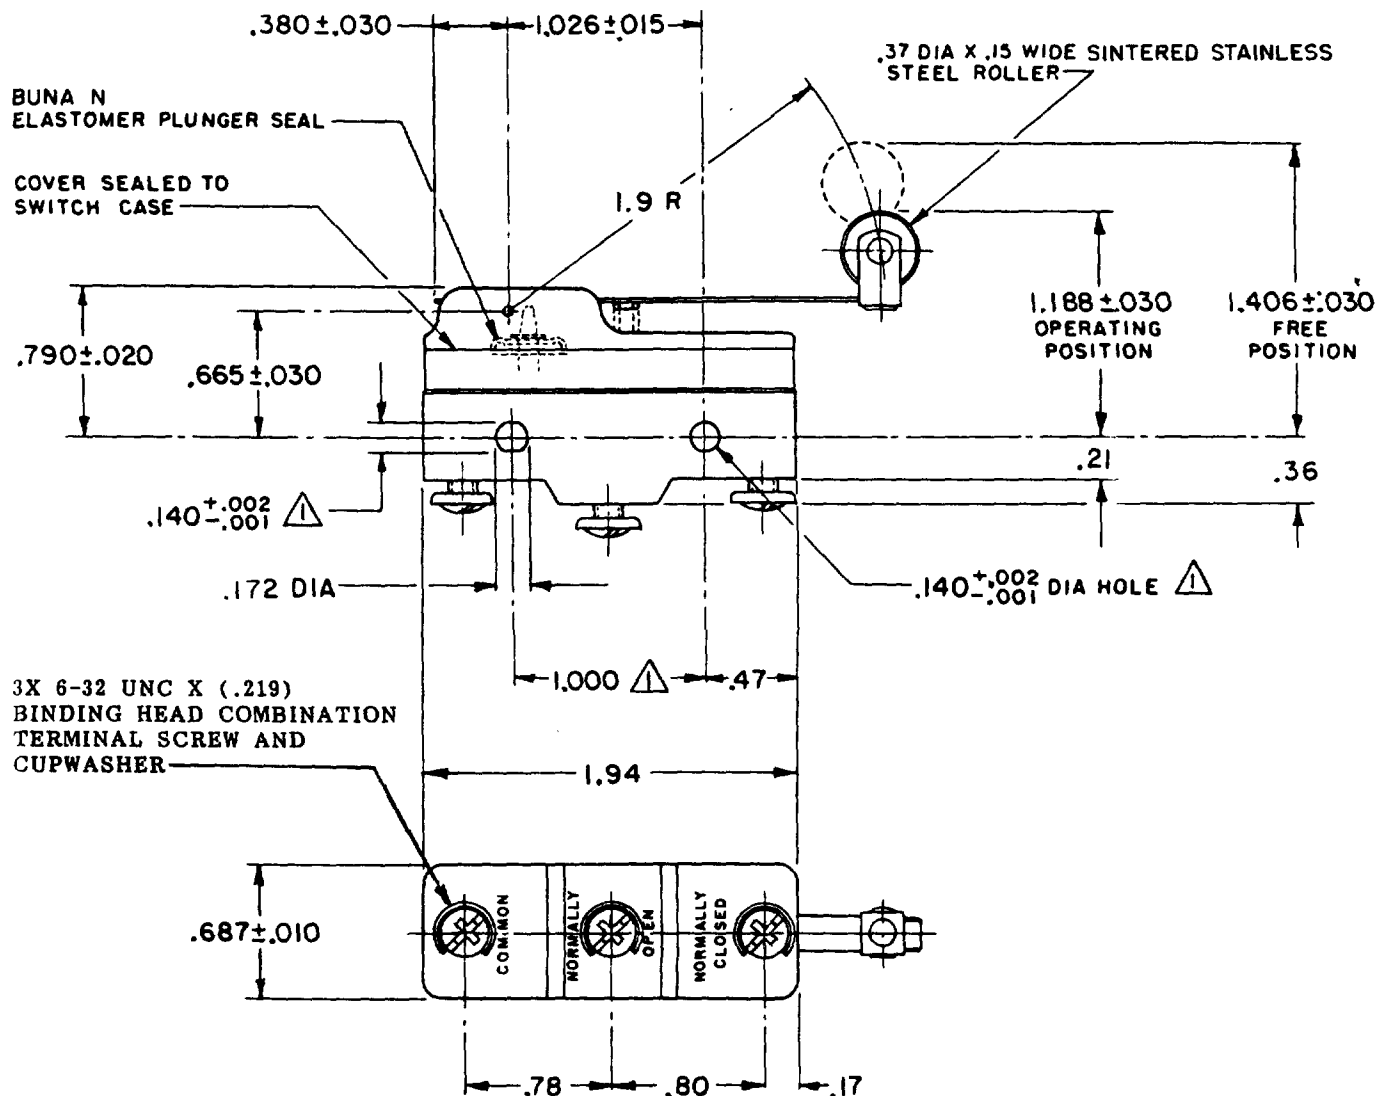

NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE----- 3 1/2 OZ MAX
RELEASE FORCE----- 3/4 OZ MIN
DIFFERENTIAL TRAVEL----- .004-.040
OVERTRAVEL----- .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22 1A 125 VAC

L288
L315-
L307

CE RJ SP 05
1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES

WEIGHT .076 LB