

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW82725551-D6

AQB2410

BZ-2RW82725551-D6
PAGE 1 OF 1

M

DRAWING
NUMBER

78

ISSUE

RELEASE NO.

PR-15255

REPLACES

CHECK

25 NOV 05

CHECK

25 NOV 05

CHECK

25 NOV 05

CHECK

25 NOV 05

CHECK

25 NOV 05


CHECK

25 NOV 05

CHECK

25 NOV 05

CHECK

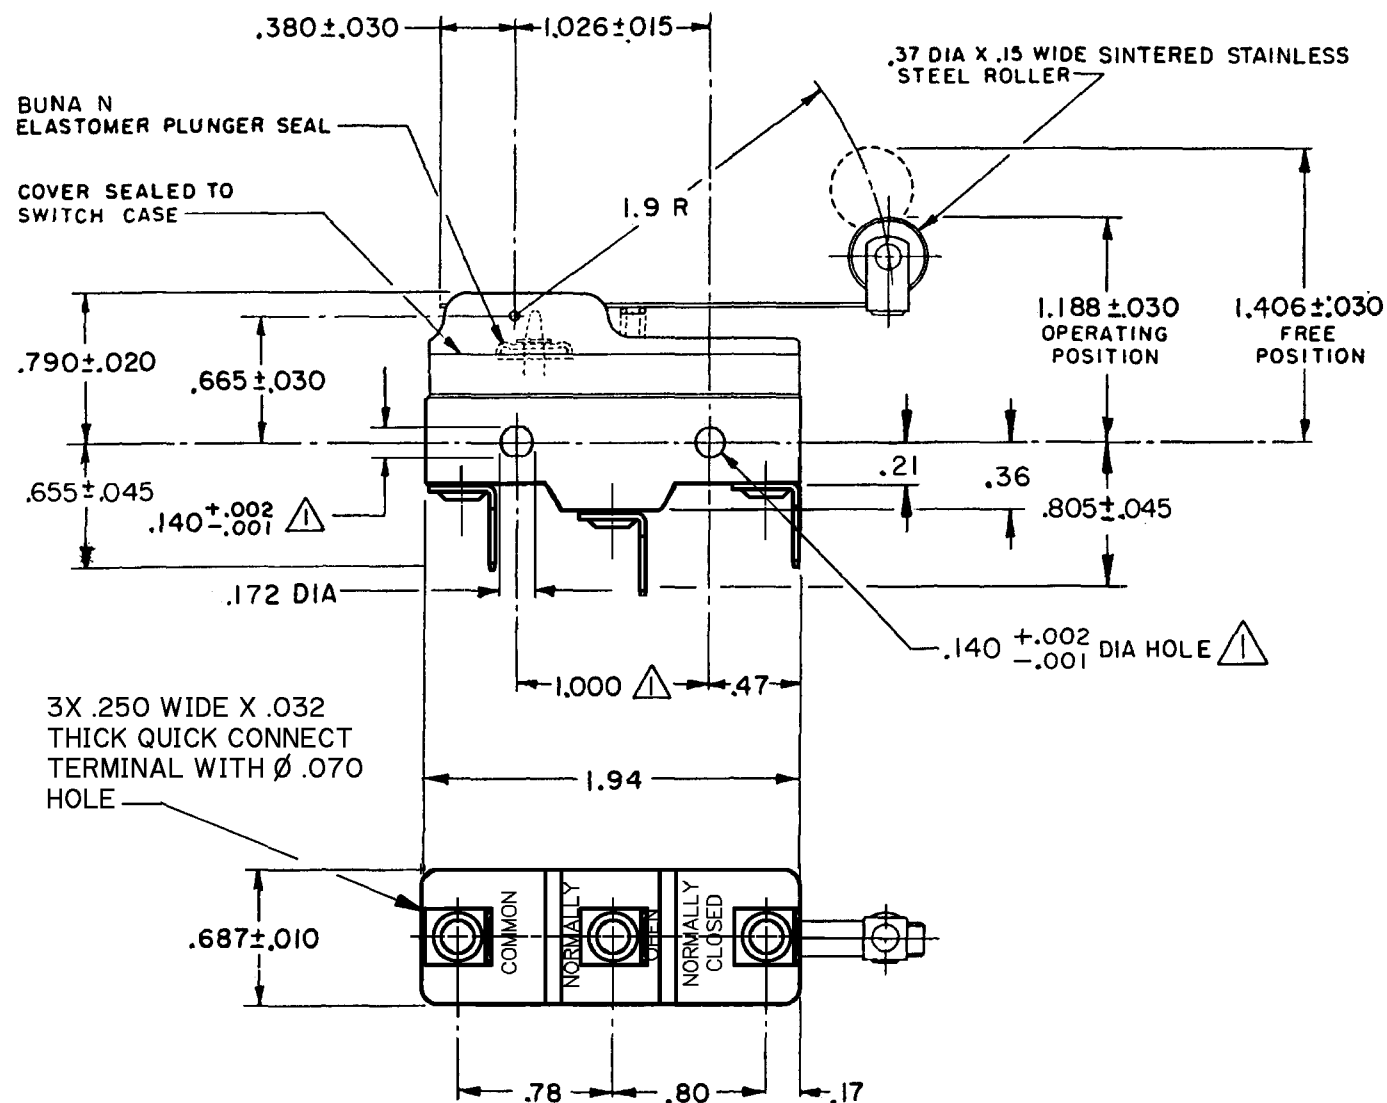


NOTES

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS
- 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- 3 - CONTACT MATERIAL - GOLD ALLOY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE --- 3 1/2 OZ MAX

RELEASE FORCE --- 3/4 OZ MIN

DIFFERENTIAL TRAVEL --- .004 - .040

OVERTRAVEL --- .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L22 1A 125 VAC

L288
L315-
L307



1A 250V ~ T85 25E3

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04	X	0.8/03
ONE PLACE	X,X	0.4/.016	X,X	0.38/.015
TWO PLACES	X,X,X	0.15/.006	X,X,X	0.13/.005
THREE PLACES	X,X,X,X		X,X,X,X	

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .076 LB

FO-52848-A

DRAWN

25 NOV 05

25 NOV 05

25 NOV 05