

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

FREDPORT, ILLINOIS

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW8292**BZ-2RW8292**

PAGE 1 OF 1

DRAWING NUMBER

M

ISSUE

9

REPLACES

RELEASE NO. SR 10165

CHECK

REVISIONS

A	CO17096	OMW	18 JUL 62
B	CO18128	OMW	19 JUN 63
C	CO46304	R J H	21 NOV 79
D	CO58037	SMA	1 OCT 85
E	CO752048	JWB	1 FEB 94
F	CO78874	DLT	19 NOV 94
G	CO93346	DLT	14 SEP 98
H	CO94212-J	JJA	6 OCT 99

CHECK

CHECK

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

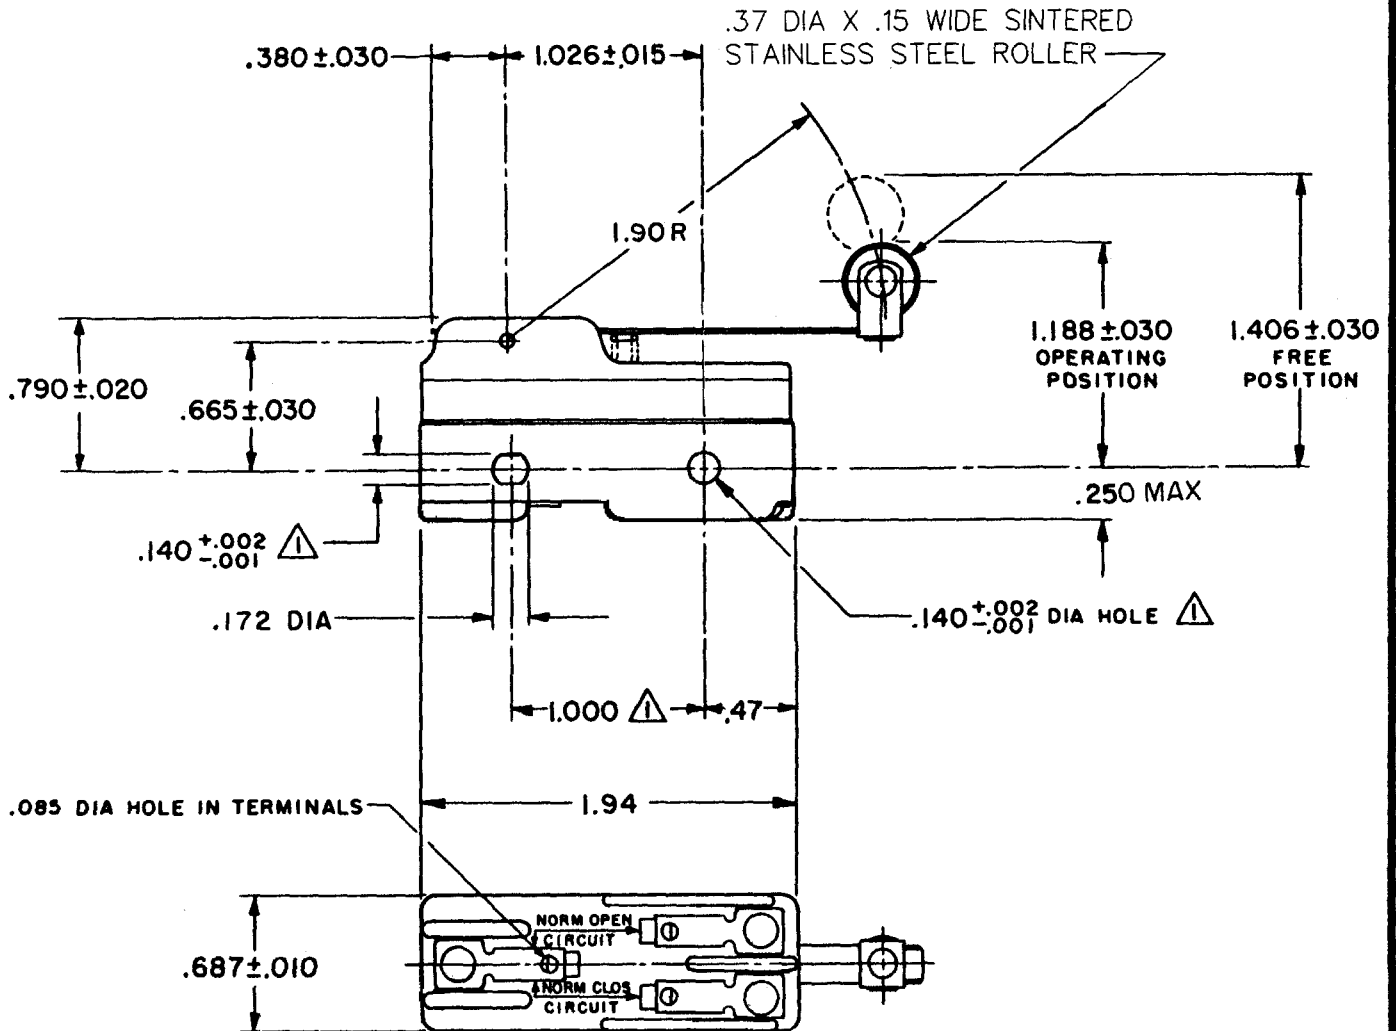

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 3 1/2 OZ MAX

RELEASE FORCE ——— 3/4 OZ MIN

★ ★ DIFFERENTIAL TRAVEL ——— .015-.019

OVERTRAVEL ——— .156 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

UNDERWRITERS' LAB. INC. LISTED RATING
-L96- 15 A-125, 250, OR 480 VAC
1/2 A-125 VDC; 1/4 A-250 VDC
1/8 HP-125 VAC; 1/4 HP-250 VAC

-L288-
-L299-
-L306-

CE D SP
16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .063 LB

FORMTEK

FO-50378

DRAWN

CHECK

CHECK

CHECK

CHECK