

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
MINNEAPOLIS, MINN.

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW8435-A2

BZ-2RW8435-A2

PAGE 1 OF 1

M

DRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO 16736
	B C H 27 APRIL 62
B	CO-88640
	M J S 2 MAR 71
C	CO- 73287-J
	J A L 22 NOV 83
D	CO- 77589
	MAM 29 MAR 94
E	CO93346
	DLT 14 AUG 98

CHECK

23 MAY 62

23 MAY 62

23 MAY 62

23 MAY 62

23 MAY 62


23 MAY 62

23 MAY 62

3X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTE

① - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

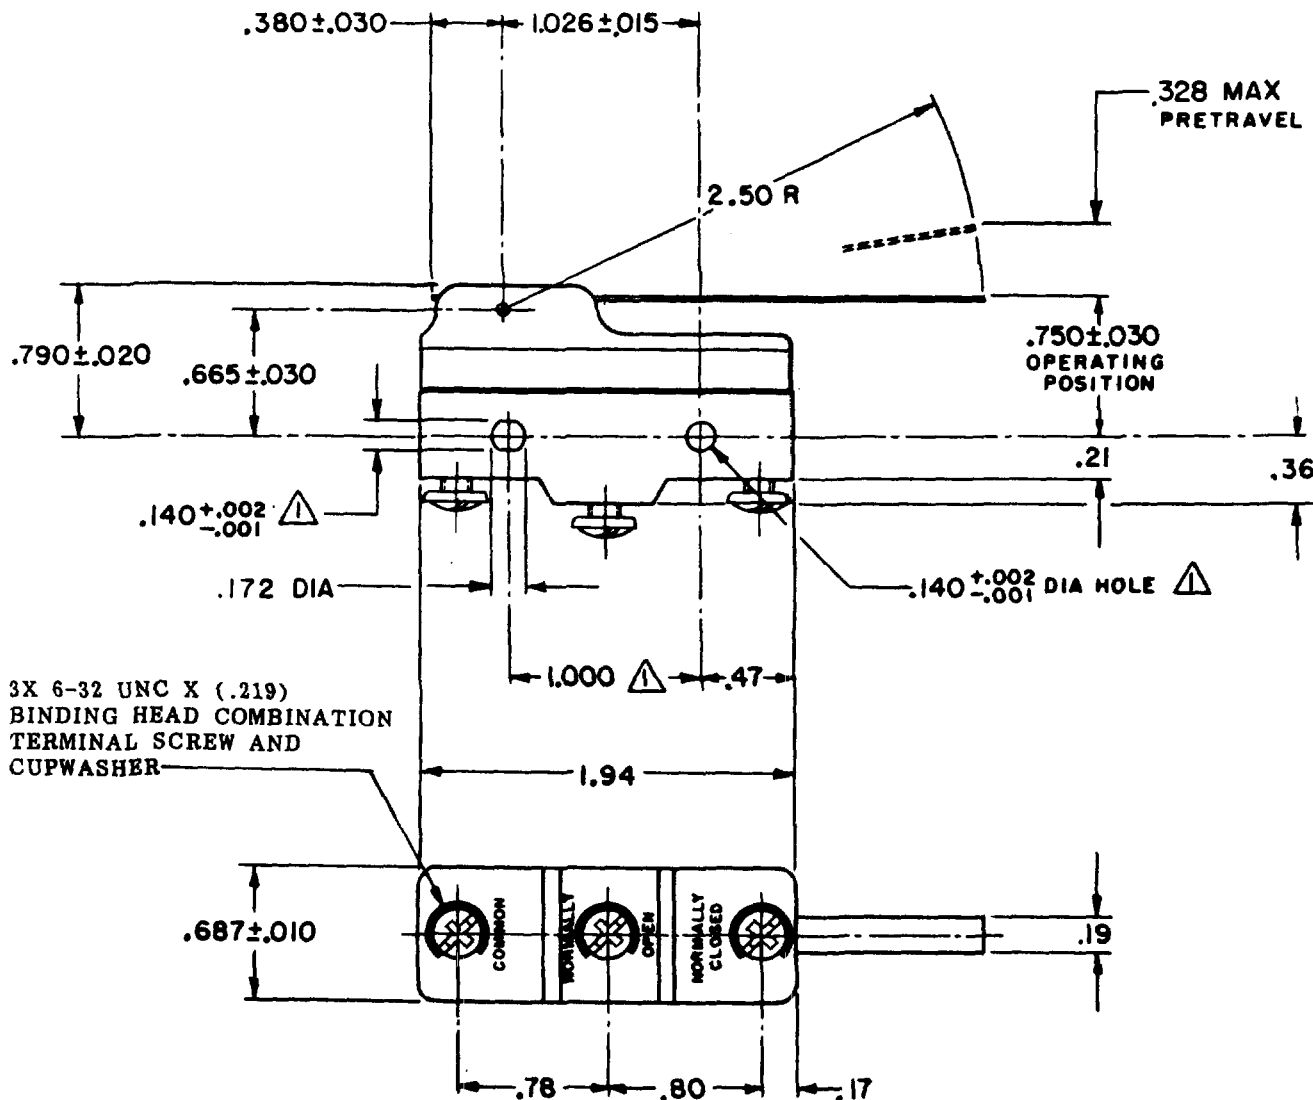

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 1/2 OZ MAX

DIFFERENTIAL TRAVEL ----- .007 - .050

OVERTRAVEL ----- .219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

BREAK DISTANCE

UNDERWRITERS' LAB. INC. LISTED RATING
-L9- 10A - 125, 250, OR 480 VAC
1/2A - 125 VDC ; 1/4A - 250 VDC

-L 288-



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:
ONE PLACE (.0) ± .000
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .073 LB

0-20378 FORMTEK

DRAWN

G C H

27 APRIL 62

27 APRIL 62