

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW8435145 T

MBZ-2RW8435145 T
PAGE 1 OF 1

DRAWING
NUMBER

5

ISSUE

REPLACES X77885-8Z

RELEASE NO. PR-12690

CHECK

REVISIONS

A	C080986
JALA	26 JUN 95
B	C093346
DLT	14 AUG 98

CHECK

11 JAN 84


KAG

10 JAN 84

JAS

FORMTEK

DRAWN

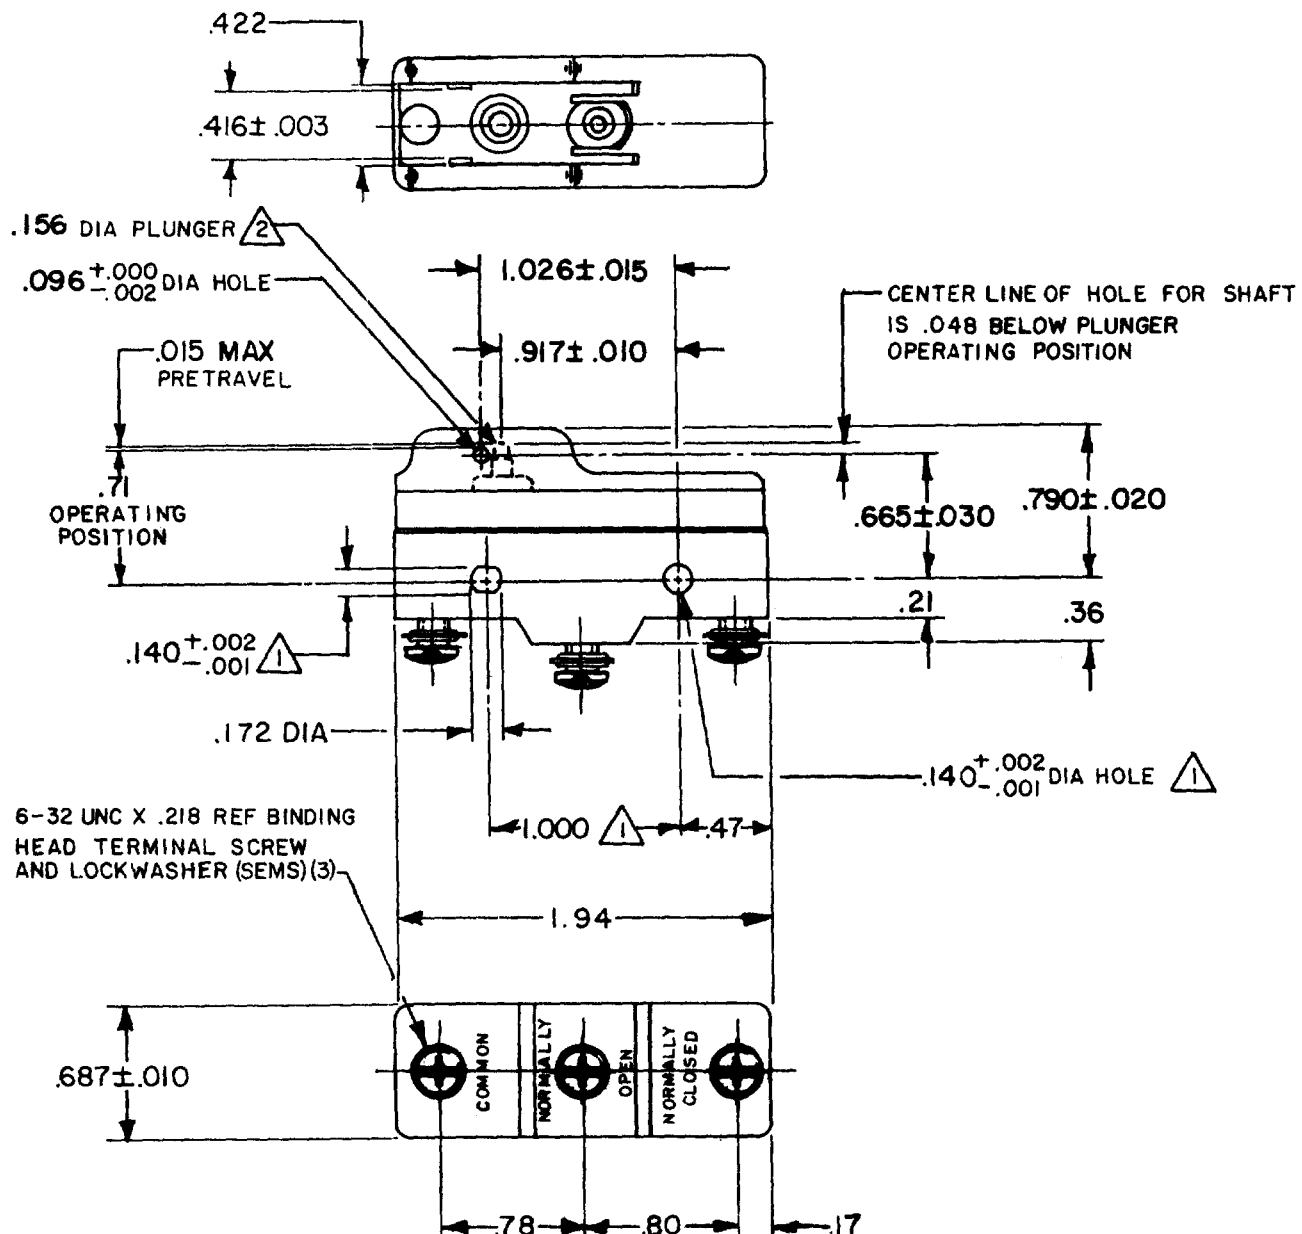


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 PLUNGERS SHOULD NOT BE INTERCHANGED AMONG SWITCHES
- 3 - SHAFT (1) FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE-----3-5 OZ.

DIFFERENTIAL TRAVEL---.0004-.0020

OVERTRAVEL-----.005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

10A 125, 250 OR 480 VAC
1/2 A 125 VDC, 1/4 A 250 VDC

UL @ CE L288

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	X
ONE PLACE	X,X	0.47/016	X,X
TWO PLACES	X,X,X	0.157/008	X,X,X
THREE PLACES	X,X,X,X	0.387/015	X,X,X,X
ANGLES		0.13/005	

DESIGN UNITS

SI METRIC

US CUSTOMARY

WEIGHT .073 LB