

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW84429-P52

APY0276

CATALOG LISTING
BZ-2RW84429-P52
PAGE 1 OF 1

ISSUE
3

PSR

REPLACES

22AUG07

RELEASE NO. 201909

CHECK

22AUG07

PSR

CHECK

19 JAN 06

REVISIONS

A 0018004

TSG

19 JAN 06

B 0033162

JA

22AUG07

RJ

CHECK

13 DEC 00


SAV

CHECK

13 DEC 00

DCS


RASTER

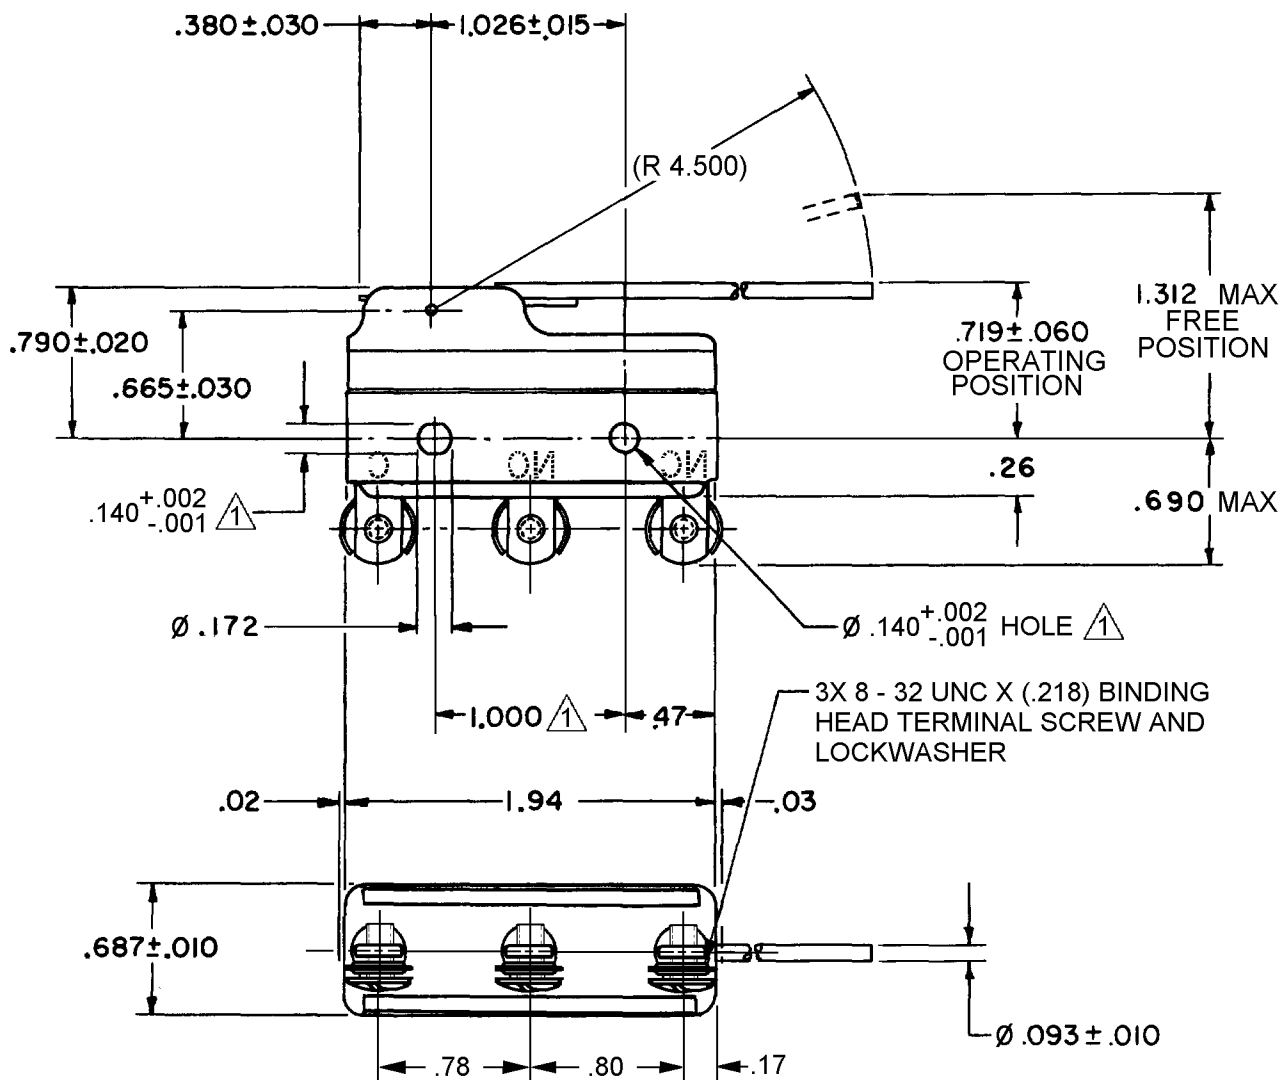

NOTE
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF Ø .139 MAX ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE 3/4 OZ MAX
DIFFERENTIAL FORCE 1/2 OZ MAX
PRETRAVEL625 MAX
DIFFERENTIAL TRAVEL027 - .219
OVERTRAVEL140 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96

15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
L288
L306
L315

CE
16A 250V ~ T85 5E4

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT