

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A

A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

BZ-2RW84441-A2

APY0281

BZ-2RW84441-A2

PAGE 1 OF 1

MDRAWING
NUMBER

5

ISSUE

REVISIONS

A	CO-73287-J	22 NOV 83
B	CO-77589	29 MAR 94
C	CO93346	17 SEP 98
D	0017579	08DEC05

REPLACES X75800-BZ

RELEASE NO. PR-11928

CHECK

08DEC05

RJ

CHECK

83

17 FEB 83


CHECK

C E B 17 FEB 83

FORMTEK

FO-52848-A

DRAWN

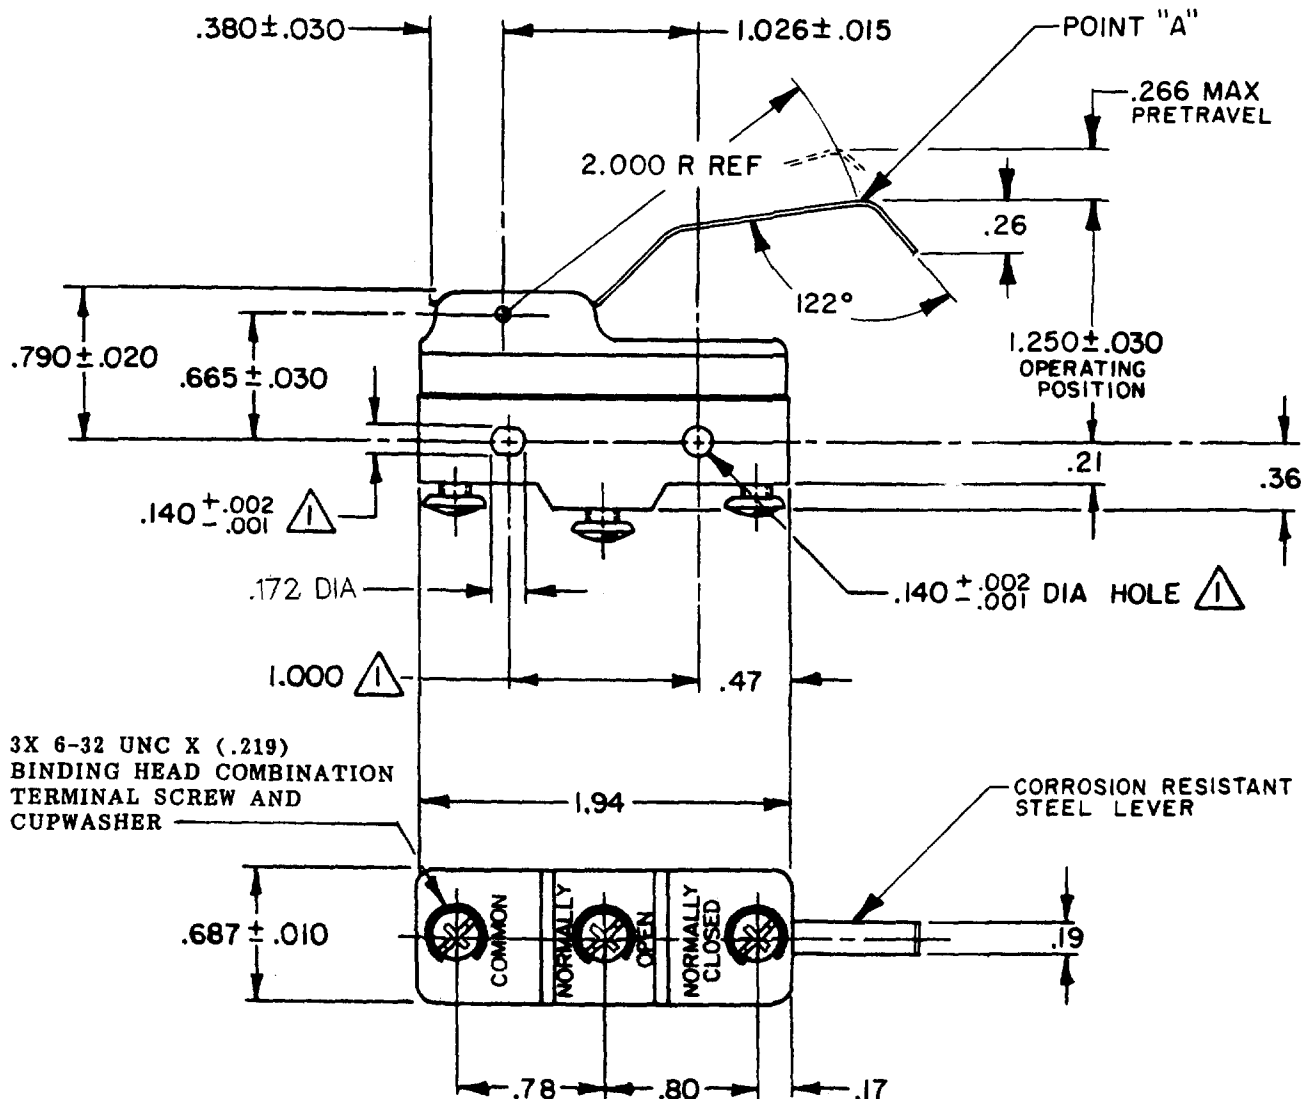


NOTE

⚠ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS AT POINT "A"**

OPERATING FORCE-----1 1/4 OZ MAX

RELEASE FORCE-----1/8 OZ MIN

DIFFERENTIAL TRAVEL----.005-.040

OVERTRAVEL-----.172 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T

CODE L96 15A-125, 250 OR 480 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC

L288
L315
L306

CE



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

DES. UNITS	TOL. mm/in	DES. UNITS	TOL. mm/in
NO PLACES	2	2	0.01/0.005
ONE PLACE	1	1	0.005/0.0025
TWO PLACES	1, 1X	1, 1X	0.0025/0.00125
THREE PLACES	1, 1X	1, 1X	0.00125/0.000625
ANGLES			

SI METRIC

DESIGN UNITS

US CUSTOMARY

WEIGHT .073 LB