

FED.MFG.CODE 91929

SWITCH - BASIC

REPLACES
X72364-BZ

RELEASE NO. **PR-10815**

CHECK

CATALOG LISTING

BZ-2RW8478-D5



5 ISSUE

REVISIONS

A	CO- 77591
---	--------------

DAW
22 JUN 94

B	C07813
---	--------

DLT
20 JUL 94

C	C09334
	D I T

DLT
17 SEP 98
D CO-

D	94212-L
	DLM

8 FEB 00	
----------	--

--	--

--	--

--	--

--	--

--	--

[illegible]

--	--

4

23

TEK
DRAWN



RM.

FO

FORMTEK

DRAWN

T	M	17	DEC	81	CHEC
---	---	----	-----	----	------

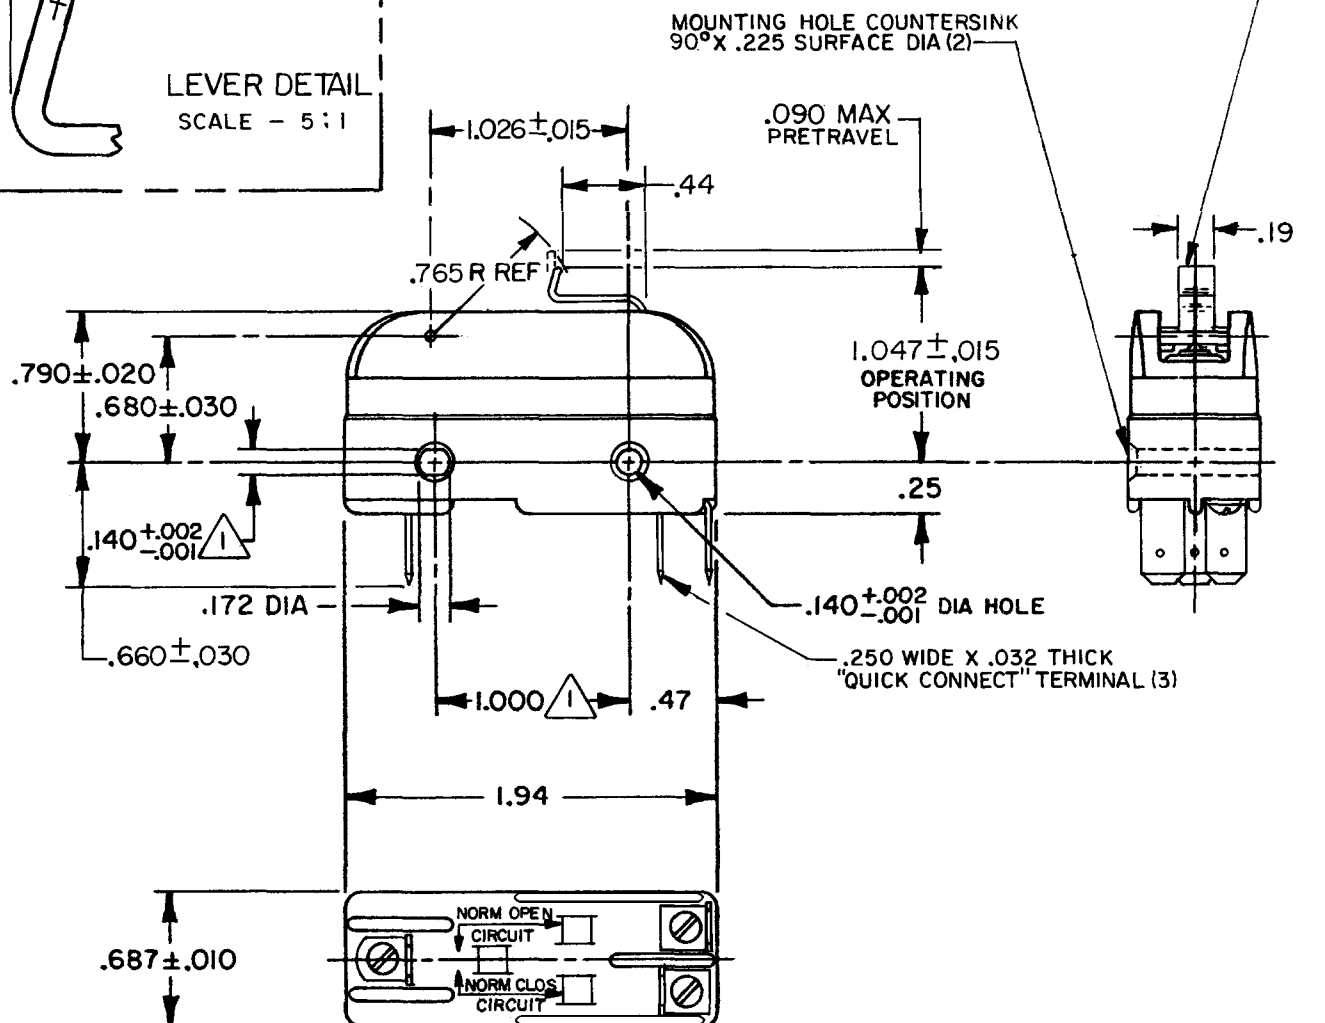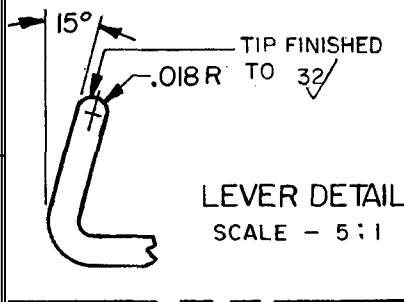


NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX. DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - - 4 OZ MAX		CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE - - - - 1/2 OZ MIN		L96 15A 125, 250 OR 480 VAC 1/8HP 125 VAC, 1/4HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC		ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL - - - .002-.010				TWO PLACE (.00)	±.015
OVERTRAVEL - - - - - .050 MIN		L288 L299 L306		THREE PLACE (.000)	±.005
		   		ANGLES	±
		16A 250V ~ T85 5E4		WEIGHT	